


**5W 400 LUMEN LED G45 LAMPS**


- Opal envelope: gives excellent all round illumination with soft appearance
- 20,000 hours average life expectancy: much reduced lamp replacement cycle & maintenance
- Flicker free instant start
- 2700K colour temperature: offering a warm lighting appearance
- Non dimmable

• M.O.M: 1 / O.P.Q: 10

**2 YEAR WARRANTY**



| Code    | Wattage | Cap Type  | Colour Temp. | Lumens | Beam Angle | Avg. Rated Life (Hrs) | Energy Rating |
|---------|---------|-----------|--------------|--------|------------|-----------------------|---------------|
| G400ES  | 5W      | ES (E27)  | 2700K        | 400 lm | 170°       | 20,000 hrs            | A+            |
| G400BC  | 5W      | BC (B22)  | 2700K        | 400 lm | 170°       | 20,000 hrs            | A+            |
| G400SES | 5W      | SES (E14) | 2700K        | 400 lm | 170°       | 20,000 hrs            | A+            |
| G400SBC | 5W      | SBC (B15) | 2700K        | 400 lm | 170°       | 20,000 hrs            | A+            |

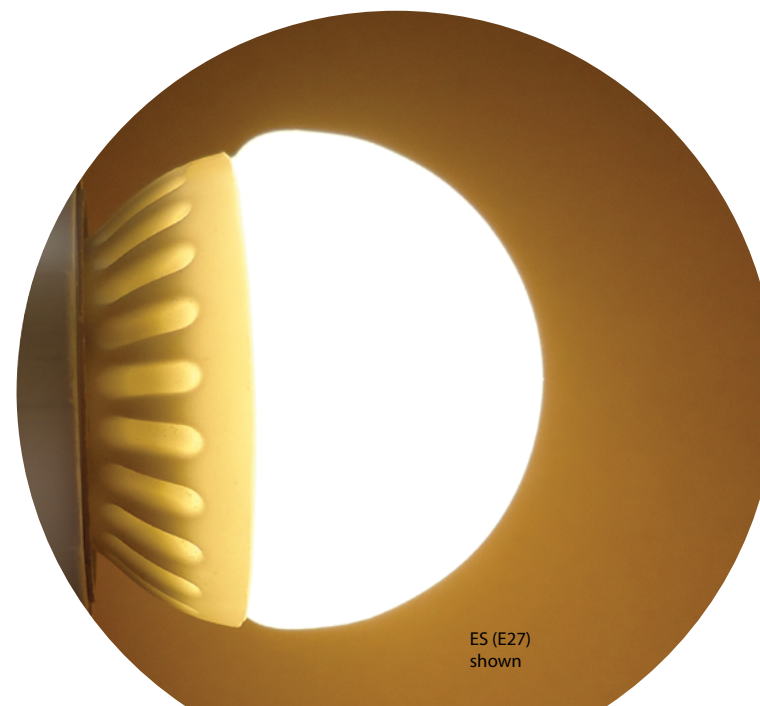

**LED LAMP SPECIFICATIONS:**

|  |                               |
|--|-------------------------------|
| Nominal luminous flux                                    | <b>400 lm</b>                 |
| Rated Wattage  | 5W                            |
| Rated luminous flux                                      | 400 lm                        |
| Nominal life time of the lamp                            | 20,000 hrs                    |
| Colour temperature                                       | 2700K                         |
| Number of switching cycles before premature lamp failure | 20,000                        |
| Warm-up time up to 60 % of the full light output         | Instant full light            |
| Dimmable   | No                            |
| Lamp dimensions (L/Ø)                                    | 70x45mm                       |
| Nominal beam angle                                       | 170°                          |
| Rated power  | 5W                            |
| Rated lamp lifetime                                      | 20,000 hrs                    |
| Lamp power factor  | >0.5                          |
| Lumen maintenance factor at end of nominal life          | 70%                           |
| Starting time  | <0.5s                         |
| Colour rendering   | >80                           |
| Colour consistency                                       | Within 6 step Macadam ellipse |
| Rated beam angle   | 170°                          |
| Cap type   | ES / BC / SES / SBC           |
| Voltage  | 240V                          |