

The lamps cannot be changed in the luminaire.

874/2012



NON DIMMABLE
LAMP SPECIFICATIONS:

Lumens total flux	4600 lm
Lumens 120° flux	4400 lm
Rated Wattage	60W
Rated luminous flux	4400 lm
Nominal life time of the lamp	35,000 hrs
Colour temperature	4000K
Number of switching cycles before premature lamp failure	30,000
Warm-up time up to 60 % of the full light output	Instant full light
Dimmable	No
Lamp dimensions (L/W)	1195 x 595mm
Nominal beam angle	115°
Rated power	60W
Rated lamp lifetime	35,000 hrs
Lamp power factor	>0.9
Lumen maintenance factor at end of nominal life	>70%
Starting time	<0.5s
Colour rendering	80 Ra
Colour consistency	Within a six step macadam ellipse
Rated peak intensity	1600cd
Rated beam angle	115°
Voltage	240V

Not suitable for accent lighting

Please note: there will be a slight reduction in lumen output if using a dimmer




600 X 1200MM LED SLIM PANEL LIGHT

- Low glare and even shadow free light distribution ensures suitability for a variety of applications: visually superior to standard fluorescent panels
- 4000K colour temperature, edge lit: offering a pleasing lighting effect
- Ultra slim profile and a white trim finish: compliments a multitude of surroundings
- Can be recessed in the ceiling or suspended from wires (suspension kit not included, part code **SUSPACK** x 2 required)
- Ability to be converted into an emergency luminaire: Eterna part code **EBPM3** required
- CRI Ra:≥80: high CRI to minimise colour distortion of illuminated products


EBPM3

- 3 hours duration in emergency mode
- For use with Eterna RDL range and LED panel lights
- Enables LED commercial downlights and LED panel lights to be converted into emergency luminaires, rated at 65W max
- Push fit plug and socket: allows quick & easy installation
- Facility for non maintained mode and for remote switching
- Control gear can be removed from the housing: allows use in installations with smaller hole cut out
- LED charge light

- **PANEL** = M.O.M: 1 / O.P.Q: 2
- **SUSPACK** = M.O.M: 1 / O.P.Q: 100
- **EBPM3** = M.O.M: 1 / O.P.Q: 1

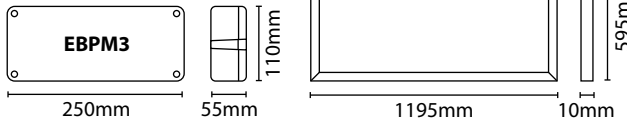

Ultra Slim Profile

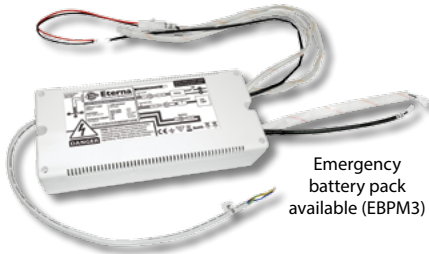

Emergency battery pack available (EBPM3)

Code	Version	Colour	Wattage	Colour Temp.	Lumens Pre-dimmed	Avg. Rated Life (Hrs)	IP Rating	Energy Rating
PLED1200	LED Panel	White	60W	4000K	4600 lm	35,000 hrs	IP20	A
ACCESSORIES								
SUSPACK	Suspension Pack	Chrome	-	-	-	-	IP20	-
EBPM3	Battery Pack	Grey	65W Max	-	-	-	IP20	-

SUSPACK
Cable length: 1m
PLED1200 max.
suspension height:
940mm

Download
IES File from
website