



LED SLIM SURFACE FITTINGS

TRIMLONG with SLICELONG

Superslim surface mounting mains voltage LED amenity fixtures for garden and path illumination, which offers a fantastic alternative to traditional bricklights without the hassle of recessed installation.

- · ABS housing, polycarbonate diffuser
- **SLICELONG / SLICEEYE** = M.O.M: 1 / O.P.Q: 24

Version

Long Fitting

Eyelid Fitting

Square Fitting Black

White Trim For SLICESQ

Black

Black

• ALL OTHERS = M.O.M: 1 / O.P.Q: 40

Code

SLICELONG

TRIMLONG

SLICEEYE

TRIMEYE

SLICESQ

TRIMSQ












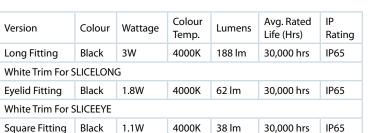



PERFECT FOR LIGHTING WALKWAYS & STAIRWAYS

> Great alternative to traditional brick lights without the hassle of recessed installation







TRIMSQ with SLICESQ

LED LAMP SPECIFICATIONS:	SLICELONG	SLICEEYE	SLICESQ
Lumens total flux	188 lm	62 lm	38 lm
Lumens 120° flux	175 lm	58 lm	36 lm
Rated Wattage	3W	1.8W	1.1W
Rated luminous flux	188 lm	62 lm	38 lm
Nominal life time of the lamp	30,000 hrs	30,000 hrs	30,000 hrs
Colour temperature	4000K	4000K	4000K
Number of switching cycles before premature lamp failure	15,000	15,000	15,000
Warm-up time up to 60% of the full light output	Instant full light	Instant full light	Instant full light
Dimmable	No	No	No
LED array dimensions (L/W)	175 x 35mm	175 x 5mm	80 x 5mm
Nominal beam angle	120°	120°	120°
Rated power	3W	1.8W	1.1W
Rated lamp lifetime	30,000 hrs	30,000 hrs	30,000 hrs
Lumen maintenance factor at end of nominal life	70%	70%	70%
Starting time	<0.5s	<0.5s	<0.5s
Colour rendering	≥80	≥80	≥80
Colour consistency	Within 6 step Macadam ellipse	Within 6 step Macadam ellipse	Within 6 step Macadam ellipse
Rated peak intensity	56.4cd	18.82cd	11.54cd
Rated beam angle	120°	120°	120°
Voltage	240V	240V	240V
Not suitable for accent lighting			