




SUITABLE FOR OFFICES AND COMMERCIAL APPLICATIONS



Panel fixture



Panel close up

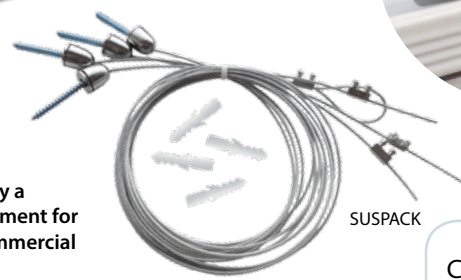


SUSPACK

600 X 600MM ECONOMY LED PANEL


This light panel is designed to fit into the space normally occupied by a standard 600mm x 600mm ceiling tile, it is therefore a direct replacement for traditional modular fluorescent fittings used in many offices and commercial applications.

- Aluminium frame
- Low glare and even shadow free light distribution ensures suitability for a variety of applications: visually superior to standard fluorescent panels
- 4000K colour temperature, edge lit: offering a pleasing lighting effect
- Ultra slim profile and a white trim finish to match the majority of T. bar ceilings
- Can be recessed in the ceiling or suspended from wires (suspension kit not included, part code **SUSPACK**)
- CRI Ra:≥80: High CRI to minimise colour distortion of illuminated products

- **PANEL** = M.O.M: 1 / O.P.Q: 5
- **SUSPACK** = M.O.M: 1 / O.P.Q: 100

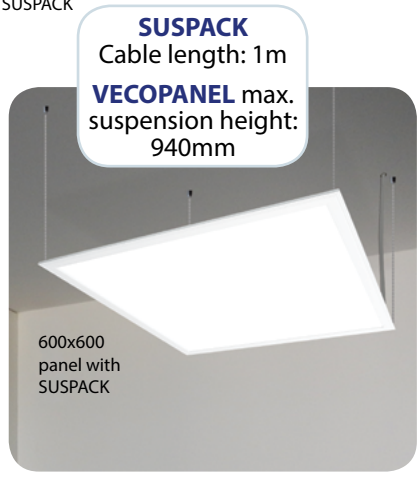

SUSPACK
Cable length: 1m
VEGOPANEL max. suspension height: 940mm



Eterna VEGOPANEL

This luminaire contains built-in LED lamps.

LED

The lamps cannot be changed in the luminaire.

874/2012

LED LAMP SPECIFICATIONS:	
Luminaire Lumens (diffuser)	3300 lm
Lumens from chip (no diffuser)	4600 lm
Useful Lumens	3200 lm
Rated Wattage	40W
Rated luminous flux	3200 lm
Nominal life time of the lamp	26,000 hrs
Colour temperature	4000K
Number of switching cycles before premature lamp failure	30,000
Warm-up time up to 60% of the full light output	Instant full light
Dimmable	No
Lamp dimensions (L/W)	595 x 595mm
Nominal beam angle	120°
Rated power	40W
Rated lamp lifetime	26,000 hrs
Lamp power factor	>0.9
Lumen maintenance factor at end of nominal life	>70%
Starting time	<0.5s
Colour rendering	>80 Ra
Colour consistency	Within a six step macadam ellipse
Rated peak intensity	1776cd
Rated beam angle	120°
Voltage / Frequency	240V~50Hz

Not suitable for accent lighting

*Subject to terms & conditions