

LAMP REPLACEMENT:

1. Switch off the electricity at the mains.
2. Remove the diffuser by undoing the three hex drive screws and lifting off.
3. Remove and replace lamp.
4. Replace the glass cover and stainless steel ring. When refitting the cover, ensure that the gasket and glass are located accurately to maintain the protection against ingress of moisture.
5. **IMPORTANT:** Tighten each of the screws a little at a time, each in turn so that all screws are tightened evenly.
6. Restore the power supply and switch on.

REPLACEMENT LAMP TYPE:

Requires 1 x suitable GU10 PAR16 energy saving lamp (not included).
Fitting is rated at 50W max.

CLEANING:

Clean this light fitting with a soft dry cloth.

Disconnect the power and clean the exterior only of this fitting with a moist (not wet) cloth.

The glass lens may be removed and washed in a mild detergent solution. Make sure it is completely dry before putting back on your light fitting.

Do not use any chemical or abrasive cleaners.

If installed in a driveway, take care when using mechanical cleaning machinery.


EVENTUALLY, YOU MAY WANT TO REPLACE THIS PRODUCT:

Regulations require the recycling of Waste from Electrical and Electronic Equipment (European "WEEE Directive" effective August 2005—UK WEEE Regulations effective 2nd January 2007). Environment Agency Registered Producer: WEE/GA0248QZ.

WHEN YOUR PRODUCT COMES TO THE END OF ITS LIFE OR YOU CHOOSE TO REPLACE IT, PLEASE RECYCLE IT WHERE FACILITIES EXIST - DO NOT DISPOSE WITH HOUSEHOLD WASTE.

IF YOU EXPERIENCE PROBLEMS:

If you believe your product is defective, please return it to the place where you bought it. Our Technical Team will gladly advise on any Eterna Lighting product, but may not be able to give specific instructions regarding individual installations.



See website for more information on recyclability and recycling



Email: sales@eterna-lighting.co.uk / technical@eterna-lighting.co.uk

Visit our website: www.eterna-lighting.co.uk

Made in China

Eterna

Everyday Lighting For Professionals

INSTALLATION INSTRUCTIONS

A guide for qualified electricians

WARNING
Not suitable for immersion in water



Pack contents:
1 x GU10 deck light with stainless steel bezel
1 x Connection box
1 x Hexagonal drive key

Model:

GDL50SS

GU10 Deck Light With Stainless Steel Bezel

These instructions are provided as a guideline to assist you.

PLEASE READ THESE INSTRUCTIONS BEFORE INSTALLATION AND RETAIN FOR FUTURE REFERENCE

READ THIS FIRST:

Check the pack and make sure you have all of the parts listed on the front of this booklet. If not, contact the outlet where you bought this product.

This product contains glass, care must be taken when assembling, fitting or handling to prevent personal injury or damage to the product.

This light fitting must be installed by a competent person in accordance with the Building Regulations making reference to the current edition of the IEE Wiring Regulations (BS7671). The Building Regulations may be obtained from HMSO or viewed and downloaded from www.communities.gov.uk following the link for Building Regulations.


As the buyer, installer and/or user of this product it is your own responsibility to ensure that this fitting is fit for the purpose for which you have intended it. Eterna Lighting cannot accept any liability for loss, damage or premature failure resulting from inappropriate use.

This product is designed and constructed according to the principles of the appropriate British Standard and is intended for normal domestic service. Use of this fitting in any other environment, for example where prolonged periods of use may be expected and/or higher than normal ambient temperatures, may result in a foreshortened working life.

The British Standard for recessed ground/deck lights stipulates that fittings in which temperatures are generated that could cause injury are located out of reach. Use of different lamp types will generate more or less heat and so determine where it would be appropriate to install your fitting:


50W GU10 HALOGEN LAMP

High temperatures may be generated and so if this lamp is to be used, the fitting should be installed out of normal reach. ($T > 100^{\circ}\text{C}$).

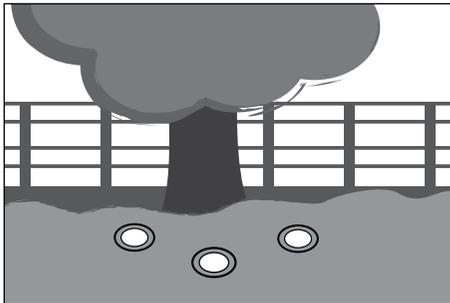


9W GU10 CFL (COMPACT FLUORESCENT)

Much lower temperatures are generated and so if this lamp is used, the fitting can be installed in most locations. The fitting may be installed where contact with parts having a temperature up to 65°C will not cause injury, for example: a fitting with this lamp might not be suitable for use in a nursery. ($T < 65^{\circ}\text{C}$).

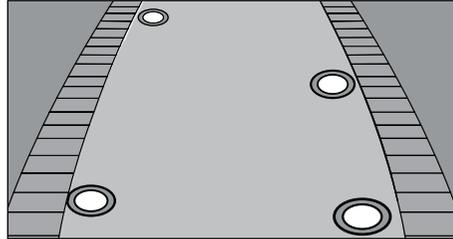

LED LOW POWER GU10 LAMPS

Where low power LED cluster lamps are used for effect rather than illumination, it is possible that no significant temperature rise would occur in use and so the fitting could be installed in almost any location, including those such as nurseries, where the temperature of the accessible parts of the fitting should be limited to 40°C . As the installer and / or user of this fitting you will need to make your own assessment based on the lamp you intend to use, the environment into which the fitting is to be installed and the risk of the wrong lamp being fitted as a replacement in future. The performance of this fitting in the most sensitive locations cannot be guaranteed because of the contributory effects of the environment, use and lamp. ($T < 40^{\circ}\text{C}$).

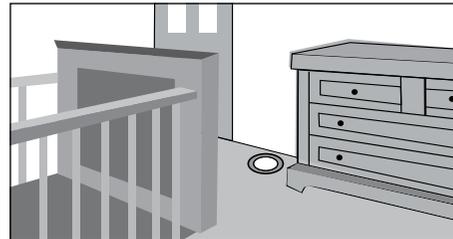

Switch off the mains before commencing installation and remove the appropriate circuit fuse or lock off MCB.

Suitable for outdoor use.

This product is suitable for installation on surfaces with normal flammability (indicated by the "F" in a triangle) e.g. wood, plasterboard, masonry. It is not suitable for use on highly flammable surfaces (e.g. polystyrene, textiles).

Before making fixing hole(s), check that there are no obstructions hidden beneath the mounting surface such as pipes or cables.

The circuit must be protected by a high-sensitivity RCD and controlled with a double pole isolating switch.

The connection box must be fixed above the ground in a position where it will not be submerged in standing water e.g. on a fence post or similar. The box is not suitable for burial in soft ground that may become water-logged.

If the location of your new fitting requires the provision of a new electrical supply, the supply must conform with the requirements of the Building Regulations making reference to the current edition of the IEE Wiring Regulations (BS7671).

Make connections to the electrical supply in accordance with the following code:

Live: Brown or Red
Neutral: Blue or Black
Earth: Green and Yellow

When making connections, ensure that the terminals are tightened securely and that no strands of wire protrude. Check that the terminals are tightened onto the bared conductors and not onto any insulation.

This product must be connected to Earth.

It must be possible to remove the fittings after installation for maintenance or in case of fault therefore, we recommend that you do not set the fitting into wet concrete, mortar or similar.

Setting into wet concrete can also cause premature deterioration of the finish as these materials can be caustic before setting.

You are advised at every stage of your installation to double-check any electrical connections you have made. After you have completed your installation there are electrical tests that should be carried out: these tests are specified in the Wiring Regulations (BS7671) referred to in the Building Regulations.

INSTALLATION:

01. Having chosen the location for your new fitting, you will need to prepare a $92\text{mm}\varnothing$ hole that has a minimum depth of 115mm. You will also need to have prepared a channel for the supply cable.
02. Remove the glass cover and surround by removing the three hexagonal drive screws with the key (supplied) and lifting off.
03. Thread the supply cable through the route you have prepared.
04. Fit a lamp appropriate to your use and the guidance on surface temperatures given previously.
05. Replace the glass cover and stainless steel ring. When refitting the cover, ensure that the gasket and glass are located accurately to maintain the protection against ingress of moisture.
06. **IMPORTANT:** Tighten each of the screws a little at a time each in turn so that all screws are tightened evenly. This will ensure the cover is pulled down evenly and maintains a tight seal preventing ingress of water (it is the responsibility of installer to ensure cover /bezel is fitted correctly).
07. Press the fitting into the hole ensuring the spring clips hold it securely.
08. Make the connections to the mains supply according to the colour coding above, using the connection box supplied. Ensure that all screws are tightened securely and that all gaskets are correctly located to maintain the protection against ingress of moisture.
09. Fix the connection box securely in position.
10. Restore the power supply and switch on.