



5
Year Warranty

K
Colour Temp.
Selectable



IP65



IK05



✓ IES Files




120° PIR



Double Insulated



PIR controls

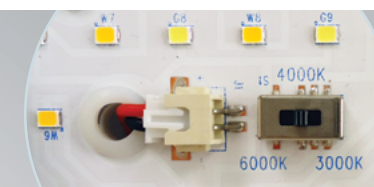

LED LAMP SPECIFICATIONS:

Luminaire lumens (with diffuser): Warm White, Cool White, Daylight White	3000K - 1166 lm
	4000K - 1252 lm
	6000K - 1232 lm
Lumens from chip (array): Warm White, Cool White, Daylight White	3000K - 1312 lm
	4000K - 1408 lm
	6000K - 1386 lm
Useful lumens (array): Warm White, Cool White, Daylight White	3000K - 1400 lm
	4000K - 1502 lm
	6000K - 1478 lm
Rated Wattage	10W
Rated luminous flux	3000K - 1400 lm 4000K - 1502 lm 6000K - 1478 lm
Nominal life time of the lamp	50,000 hrs
Colour temperature	3000/4000/6000K
Number of switching cycles before premature lamp failure	15,000
Warm-up time up to 60% of the full light output	Instant full light
Dimmable	No
Nominal beam angle	120°
Rated power	10W
Rated lamp lifetime	50,000 hrs
Displacement factor	0.91
Lumen maintenance factor at end of nominal life	0.9
Starting time	<0.3s
Colour rendering	80
Colour consistency	Within 6 step Macadam ellipse
Rated peak intensity	3000K - 316cd 4000K - 346cd 6000K - 323cd
Rated beam angle	120°
Voltage / Frequency	220-240V~50Hz
Lumen efficacy	3000K - 116.6 lm / W 4000K - 125.2 lm / W 6000K - 123.2 lm / W

This product contains a Light Source of Energy Efficiency Class D

Not suitable for accent lighting

Eterna[®]
Everyday Lighting For Professionals

10W LED CCT BULKHEAD WITH 120° PIR

Durable and attractive oval waterproof bulkhead with selectable CCT and PIR, perfect for exteriors and high-traffic circulation areas

- Compact and simple IP65 waterproof bulkhead perfect for exteriors and entryways
- Adjustable CCT to suit installation preferences
- Integral PIR sensor with 120° detection range for useful light when it is needed most
- Adjustable lux level and time adjustment from 10 seconds to 5 minutes to optimise security and efficiency
- Long lifetime of 50,000hrs and a 5 year warranty

Code	Wattage	Colour Temp.	Luminaire Lumens	Avg. Rated Life (Hrs)	IP / IK Rating	MOM / OPQ
BHPIRCS	10W	3000K 4000K 6000K	1166 lm 1252 lm 1232 lm	50,000 hrs	IP65 IK05	1 / 10

