



SEE  
PAGE 2  
FOR ENERGY  
INFO




12W LED BULKHEADS

Robustly constructed, reliable wall fitting offering more discrete illumination for utility applications.

- Tough polycarbonate housing • Hinged diffuser
- Opal diffuser: evenly diffused light output
- Corrosion resistant stainless steel cover fixing screws
- Cable channel on reverse of fitting with 20mm knockout conduit entries

BULKLEDPC

- Integral photocell: automatic dusk to dawn operation







Code	Version	Colour	Wattage	Colour Temp.	Luminaire Lumens	Avg. Rated Life (Hrs)	IP Rating	MOM / OPQ
BULKLED	Standard	Black	12W	6500K	1250 lm	30,000 hrs	IP65	1 / 12
BULKLEDPC	Photocell							



5  
Year Warranty



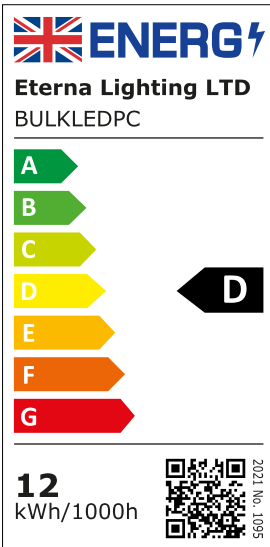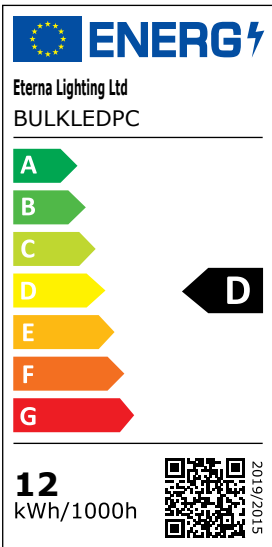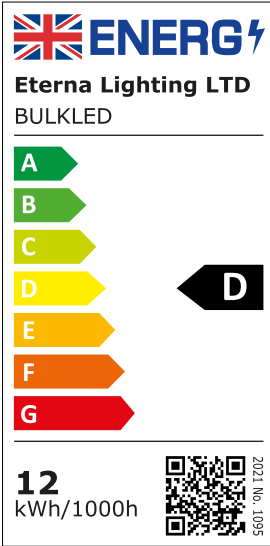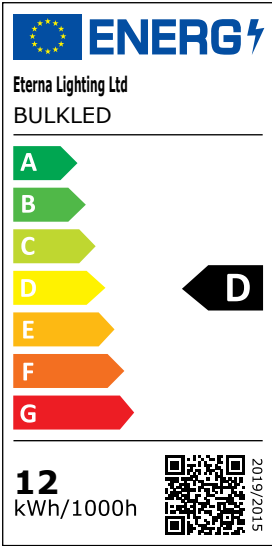

LED LAMP SPECIFICATIONS:	
Luminaire lumens (with diffuser)	<b>1250 lm</b>
Lumens from chip (no diffuser)	<b>1650 lm</b>
Useful lumens	<b>705 lm</b>
Rated Wattage	12W
Rated luminous flux	705 lm
Nominal life time of the lamp	30,000 hrs
Colour temperature	6500K
Number of switching cycles before premature lamp failure	≥15,000
Warm-up time up to 60% of the full light output	Instant full light
Dimmable	No
Nominal beam angle	120°
Rated power	12W
Rated lamp lifetime	30,000 hrs
Displacement factor	≥0.7
Lumen maintenance factor at end of nominal life	≥0.8
Starting time	Instant full light
Colour rendering	≥80
Colour consistency	Within a six step Macadam ellipse
Rated peak intensity	294cd
Rated beam angle	120°
Voltage / Frequency	240V~50Hz
Lumen efficacy: 104 lm / W	
This product contains a Light Source of Energy Efficiency Class D	
Class 2 double insulated	
Not suitable for accent lighting	