

V2



**Eterna**<sup>®</sup>

Everyday Lighting For Professionals

**IRELAND**

# THE CATALOGUE



*Everyday Lighting For Professionals*



# Eterna®

Everyday Lighting For Professionals

## IRELAND

O'Neills Electrical Limited trading as Eterna Lighting Ireland

Along with other efficiencies and continued service improvements, our team here in Dublin are ever more able to support you and your customers with your LED lighting needs.

**Distributed throughout Ireland & Northern Ireland by Eterna Lighting Ireland**

**SALES:**

**T: +353 1 844 6300**

**E: [sales@eterna-lighting.ie](mailto:sales@eterna-lighting.ie)**

**W: [www.eterna-lighting.ie](http://www.eterna-lighting.ie)**



# Eterna®

Everyday Lighting For Professionals

## IRELAND

**Next Day Delivery**



**NEXT DAY DELIVERIES**



**DIRECT TO SITE DELIVERIES**



**MULTI £/€M STOCK AVAILABILITY**

## Who Are..... Eterna?

- ✓ 75+ years supplying the lighting industry
- ✓ Family owned financially robust business
- ✓ Wide portfolio of products for commercial, domestic & industrial markets
- ✓ Quality assurance from ISO9001, partner relationships and AQL testing
- ✓ Customer focussed LED warranty policy
- ✓ Accredited member of LIA

## Our Offer

- ✓ Supporting customers on UK mainland from Wellingborough and Ireland
- ✓ Next day delivery and direct to site options (conditions apply)
- ✓ Significant stocks in both UK and Dublin
- ✓ Experienced and helpful sales & customer service teams
- ✓ Expertise & advice from the technical team
- ✓ Specification sheets & IES files available for download
- ✓ Continual flow of new products
- ✓ Innovative marketing materials
- ✓ Network of supporting distributors

## CONTENTS

■ Emergency Lighting	04-14
■ Ceiling/Wall/Bulkheads	15-29
■ Panels	30-32
■ Battens - Interior	31-36
■ Battens - Weatherproof	37-39
■ Floodlighting	40-43
■ High & Low Bay	44-46
■ Downlights	47-51
■ Bathroom Lighting	52-55
■ Cabinet Lighting	56-58
■ Garden Lighting & Spotlighting	59-63
■ Lanterns	64-65
■ Hand Dryers & Heating	66-69
■ Lighting Controls	70-73
■ Accessories & Lamps	74-79
■ Discontinued Lines	80-81
■ Notes	82
■ Terms & Conditions	83
■ Index	84-85

# EMERGENCY LIGHTING



OR



## WHAT IS THE DIFFERENCE BETWEEN MAINTAINED & NON MAINTAINED?

### MAINTAINED

**ILLUMINATED ALL THE TIME & IN EMERGENCY MODE STAYS ILLUMINATED BUT AT A LOWER LIGHT LEVEL**

Luminaire is continuously illuminated and switches on to emergency battery operation in the event of a mains failure.

### NON-MAINTAINED

**ILLUMINATES ONLY IN EMERGENCY MODE**

Luminaire is normally off but illuminates in emergency battery operation in the event of a mains failure.

Green LED is illuminated in normal operation to indicate there is a healthy charge into the battery.

**SEE WEBSITE FOR REPLACEMENT EMERGENCY BATTERIES**



## THE COMPLETE EMERGENCY SERVICE

Keep up to date with new emergency products on our website

- ✓ Signs Directive range
- ✓ ISO 7010 range
- ✓ Self-Test range
- ✓ Battery Replacement Service
- ✓ 5 Year Warranty on all LED products (1 Year Warranty on batteries)

**STAY SAFE • SAVE TIME • SPECIFY ETERNA**

## EMERGENCY VARIATIONS EXPLAINED

	Maintained (Unswitched) (Permanent Live PL)	Luminaire is continuously illuminated and will switch over to emergency, battery operation, in the event of a mains failure
	Maintained (Switched) (Switched Live SL)	Luminaire can be switched on & off in normal operation, and will switch over to emergency, battery operation, in the event of a mains failure
	Non Maintained	Luminaire is normally off but illuminates in emergency, battery operation, in the event of a mains failure
	Sustained	When a fitting has a dedicated separate lamp that operates in emergency mode








# SELF-TEST EXPLAINED

[www.eterna-lighting.co.uk/self-test](http://www.eterna-lighting.co.uk/self-test)

## How does the Eterna Self-Test system work?

- ✓ On installation, the internal clock will assign a date for the monthly and annual test - the installer does not need to set anything up!
- ✓ The initial monthly test will occur between 16 and 30 days of installation. Subsequent monthly tests will occur every 30 days.
- ✓ The initial full test will occur between 200 and 360 days from installation. Subsequent annual tests will occur every 360 days.

Operation	Indicator colour	Action / number of flashes within 3 seconds
Normal operation		Constant
Duration test is underway		 Rapid
Battery circuit		
Light source failure		
Failure of duration test		
Auto test function fails		
LED indicator off	-	In Emergency mode (mains failure)

## The benefits of Eterna's Self-Test Emergency Lighting

- ✓ More effective and reliable than manual testing
- ✓ Easy to install
- ✓ Saves time and money
- ✓ Testing causes no disruption to the normal operation of the building
- ✓ Staggered tests mean all areas are protected in the event of a power failure

## SELF-TEST

All Eterna Self-Test products in this catalogue can be identified by the green font as shown above


**When it comes to Self-Test emergency: Stay Safe • Save Time • Specify Eterna**

## LED EMERGENCY BULKHEADS

### Low energy alternative to standard fluorescent emergency bulkheads

V1

- Polycarbonate construction • Internal or external use • 20mm gland entries as standard
- Hinged gear tray & push fit terminal block: allows for quicker and easier installation and maintenance
- Minimum 3 hour functionality in emergency mode • High output LEDs with bright white light
- Semi recessed fixing option available: BULKFRAME allows a more discreet installation option
- Dedicated self adhesive legend pack included with a combination of symbols: allows multiple exit path designation options
- Additional legend sets available: ISOLGDSET (ISO 7010 format) / LGDSET (signs directive format) which can be used as additional legend sets or as individual stickers for walls and doors
- 235 lm (mains) / 150 lm (battery) • Earthed
- Battery - Ni-Cd 3.6V 1500mAh
- Battery 1 year warranty - Replacement battery code: EB1
- IES files available




### MAINTAINED VERSIONS:

- Facility for remote switching and non-maintained mode

### BULKFRAME:

- Pressed steel construction • Spring retaining clips
- Semi recessed fixing: allows a more discreet installation option
- Hole cut out size: 350mm x 117mm



Code	Version / Legend Set Included	Wattage	Colour Temp.	Avg. Rated Life (Hrs)	IP Rating	Viewing Distance	MOM / OPQ
<b>Maintained</b>							
EML3MISO	ISO 7010	7W	6000K	30,000 hrs	IP65	20m	1 / 12
EMLED3M	Signs Directive						
<b>Non Maintained</b>							
EML3NMISO	ISO 7010	2W	6000K	30,000 hrs	IP65	20m	1 / 12
EMLED3NM	Signs Directive						
<b>Accessories</b>							
BULKFRAME	White Bulkhead Frame						1 / 12
ISOLGDSET	ISO 7010 Legend Set						12 / 12
LGDSET	Signs Directive Legend Set						12 / 12



## LI-ION SELF-TEST MAINTAINED LED EMERGENCY BULKHEAD

V1


LiFePO4 Lithium battery technology offers reduced energy consumption, enhanced charging cycle capacity & improved operational life compared to standard NiCad products. Self test technology is more effective and reliable than manual testing saving time and disruption to normal operation of the building

- Polycarbonate construction • Hinged gear tray & push fit terminal block • 20mm gland entries as standard
- Minimum 3 hour functionality in emergency mode • 270 lm (mains) / 150 lm (battery)
- Facility for remote switching and non-maintained mode
- Automatic Testing complies with BS EN 62034
- Self-adhesive ISO 7010 legend pack included with a combination of symbols allowing multiple exit path designation options
- Double Insulated • Battery: Li-Ion 3.2V 1500mAh
- Battery 5 year warranty - Replacement battery code: EB19
- IES files available



### BFRAME:

- Pressed steel construction • Spring retaining clips
- Semi recessed fixing: allows a more discreet installation option
- Hole cut out size: 355mm x 120mm



Code	Wattage	Colour Temp.	Avg. Rated Life (Hrs)	IP Rating	Viewing Distance	MOM / OPQ
SEMEM3	4W	6400K	40,000 hrs	IP65	20m	1 / 10
<b>Accessories</b>						
BFRAME	White Bulkhead Frame					1 / 50
ISOLGDSET	ISO 7010 Legend Sticker Set					1 / 12
LGDSET	Signs Directive Legend Sticker Set					1 / 12



# EMERGENCY LIGHTING

## LI-ION MAINTAINED LED EMERGENCY BULKHEAD




5  
Year Warranty



Li-Ion Battery



- Polycarbonate construction • Hinged gear tray • Push fit terminals • 20mm gland entries as standard
- Minimum 3 hour functionality in emergency mode
- Facility for remote switching and non-maintained mode
- ISO 7010 legend set included
- Double insulated • 270/130 lm
- Battery - Li-Ion 3.2V 1500mAh
- Battery 5 year warranty - Replacement battery code: EB17
- IES files available



Code	Wattage	Colour Temp.	Avg. Rated Life (Hrs)	IP Rating	Viewing Distance	MOM / OPQ
KEM3BULKLI	4W	6400K	40,000 hrs	IP65	20m	1 / 10
See below for accessories						

V1


## ECONOMY MAINTAINED LED EMERGENCY BULKHEADS



5  
Year Warranty



- Polycarbonate construction • Hinged gear tray • Push fit terminals • 20mm gland entries as standard
- Minimum 3 hour functionality in emergency mode
- Facility for remote switching and non-maintained mode
- Double insulated • 270/130 lm
- Battery - Ni-Cd 3.6V 800mAh
- Battery 1 year warranty - Replacement battery code: EB21



Code	Version	Wattage	Colour Temp.	Avg. Rated Life (Hrs)	IP Rating	Viewing Distance	MOM / OPQ
VECOMEM3L	Fitting With Legend	4W	6400K	40,000 hrs	IP65	20m	1 / 10
VECOMEM3	Without Legend						
See below for accessories							

V1


## ECONOMY MAINTAINED LED EMERGENCY BULKHEAD



5  
Year Warranty



- Polycarbonate construction • Hinged gear tray • Push fit terminals • 20mm gland entries as standard
- Minimum 3 hour functionality in emergency mode
- Facility for remote switching and non-maintained mode
- ISO 7010 legend set included
- Double insulated • 270/130 lm
- Battery - Ni-Cd 3.6V 800mAh
- Battery 1 year warranty - Replacement battery code: EB21
- IES files available



Code	Wattage	Colour Temp.	Avg. Rated Life (Hrs)	IP Rating	Viewing Distance	MOM / OPQ
KEM3ML	4W	6400K	40,000 hrs	IP65	20m	1 / 10
See below for accessories						

V1

## ACCESSORIES FOR PRODUCTS ABOVE




1  
Year Warranty



- Legend sets can be used as additional legend sets or as individual stickers for walls and doors

### BFRAME:

- Pressed steel construction • Spring retaining clips
- Semi recessed fixing: allows a more discreet installation option
- Hole cut out size: 355mm x 120mm



Code	Version	MOM / OPQ
BFRAME	White Bulkhead Frame	1 / 50
VECOEMISOL	ISO 7010 Legend Sticker Set	1 / 500
LGDSET	Signs Directive Legend Sticker Set	1 / 12

V1

# EMERGENCY LIGHTING

## LED EMERGENCY EXIT BOX SIGN




**5**  
Year Warranty



### Low energy alternative to standard emergency exit signs

V1

- Steel construction • LED charge light • Facility for remote switching
- 3 hour maintained mode as standard which can also be configured for non maintained operation
- Diffuser on base: for added downward illumination of escape route
- Long life energy efficient LED light source eliminates lamp replacement cycle without compromising panel visibility distance
- Battery test button • 55 lm • Earthed
- Battery - Ni-Cd 3.6V 1500Ah
- Battery 1 year warranty - Replacement battery code: EB4



Code	Legend Set Included	Wattage	Avg. Rated Life (Hrs)	IP Rating	Viewing Distance	MOM / OPQ
EXIT3MLED	Signs Directive Down Arrow	4W	30,000 hrs	IP20	32m	6 / 6

#### Accessories

Signs Directive	ISO 7010	Version	MOM / OPQ
EBLGDL	ISOEBLGDL	Left Arrow Legend	1 / 100
EBLGDR	ISOEBLGDR	Right Arrow Legend	
EBLGDU	ISOEBLGDU	Up Arrow Legend	
	ISOEBLGDD	Down Arrow Legend	

## LI-ION COMPACT EMERGENCY LED EXIT BOX




**5**  
Year Warranty



Li-Ion Battery

- Steel construction • Push fit terminals • LED charge light and battery test button
- 3 hour maintained mode as standard which can also be configured for non maintained operation
- Facility for remote switching
- Full range of interchangeable polycarbonate ISO 7010 legends available, comes complete with up arrow legend
- Diffuser on base: for added downward illumination of escape route
- Earthed • Battery - Li-Ion 3.2V 1500mAh
- Battery 5 year warranty - Replacement battery code: EB17



Code	Wattage	Avg. Rated Life (Hrs)	IP Rating	Viewing Distance	MOM / OPQ
VECOEXIT3M	4W	30,000 hrs	IP20	29m	1 / 20
Accessories					
VECOISOD	Down Arrow ISO 7010 Legend				1 / 20
VECOISOL	Left Arrow ISO 7010 Legend				
VECOISOR	Right Arrow ISO 7010 Legend				

## LI-ION COMPACT EMERGENCY LED EXIT BOX




**5**  
Year Warranty



Li-Ion Battery

- Steel construction • Push fit terminals • LED charge light and battery test button
- 3 hour maintained mode as standard which can also be configured for non maintained operation
- Facility for remote switching
- Full range of interchangeable polycarbonate ISO 7010 legends available, comes complete with up arrow legend
- Diffuser on base: for added downward illumination of escape route
- Earthed • Battery - Li-Ion 3.2V 1500mAh
- Battery 5 year warranty - Replacement battery code: EB17



Code	Wattage	Avg. Rated Life (Hrs)	IP Rating	Viewing Distance	MOM / OPQ
KEXIT3MLI	4W	30,000 hrs	IP20	29m	1 / 20
Accessories					
VECOISOD	Down Arrow ISO 7010 Legend				1 / 20
VECOISOL	Left Arrow ISO 7010 Legend				
VECOISOR	Right Arrow ISO 7010 Legend				

# EMERGENCY LIGHTING

## SLIM LED MAINTAINED EMERGENCY EXIT BOX INCLUDING LEGENDS

**LED**

**5**  
Year Warranty


**Emergency Product**



An aesthetically pleasing, low energy, ultra slim alternative to conventional exit boxes

V1

- Polycarbonate construction • LED charge light
- Ultra slim design: excellent solution where a more compact fitting is required
- 3 hour maintained mode as standard which can also be configured for non maintained operation
- Diffuser on base: for added downward illumination of escape route
- Interchangeable down, up, left & right arrow signs directive exit legends included
- Long life energy efficient LED light source eliminates lamp replacement cycle without compromising panel visibility distance
- Facility for remote switching • For wall mounting only • Earthed
- Battery - Ni-Mh 3.6V 2000mAh
- Battery 1 year warranty - Replacement battery code: EB7



Code	Wattage	Avg. Rated Life (Hrs)	IP Rating	Viewing Distance	MOM / OPQ
EBLSLIMM	5.2W	30,000 hrs	IP20	33m	1 / 10

**ETERNA EMERGENCY BATTERY PACKS ARE COMPATIBLE WITH:**

**LED PANELS  
& COMMERCIAL DOWNLIGHTS**



## EMERGENCY BATTERY PACKS & SELF-TEST OPTION


**2**  
Year Warranty

**Emergency Product**



- Polycarbonate construction • LED charge light • Earthed
- Enables LED panel lights to be converted into emergency luminaires, rated at 10-60V 100W max
- Control gear can be removed from the housing: allows use in installations with smaller hole cut out
- 3 hours duration in emergency mode
- Push fit plug and socket: allows quick & easy installation
- Facility for non maintained mode and for remote switching
- Battery - Ni-Cd 3.6V 4.5Ah
- Battery 1 year warranty - Replacement battery code: EB5
- **SEEBPM3** - Automatic testing in accordance with BS EN 62034

V1



Code	Version	Maximum Load	IP Rating	MOM / OPQ
EBPM3	Standard	10-60V 100W Max	IP20	1 / 1
SEEBPM3	<b>Self Test</b>			

## LI-ION EMERGENCY BATTERY PACK

**2**  
Year Warranty

**Emergency Product**


**Li-Ion Battery**



**Compact & lightweight emergency back up pack for use with LED panels & downlights incorporating Lithium battery technology**

V1

- Tough polycarbonate enclosure • Double insulated
- LiFePO4 Lithium battery technology offering reduced energy consumption, enhanced charging cycle capacity & improved operational life compared to standard NiCad products
- 3 hour maintained or non maintained operation
- Enables LED luminaires to be converted to emergency, rated: 18-60Vdc maximum 150W load
- Charging LED housed in recessed holder allowing placement adjacent to luminaire
- Push twist & lock plug in system for quick & easy installation
- Battery - Li-Ion 6.4V 1500mAh
- Battery 5 year warranty - Replacement battery code: EB20



Code	Fitting Wattage	Maximum Load	IP Rating	MOM / OPQ
EBPM3LI	3W	18-60Vdc Maximum 150W	IP20	1 / 40



# EMERGENCY LIGHTING

## IP65 LED TWINSPOUT EMERGENCY FITTING




5  
Year Warranty



**Proven fitting with long term reliability and performance along with high ingress protection**

V1

- Polycarbonate construction • IES files available
- Twin 3W LED projectors: provide superior light output to traditional twin spot fittings
- Horizontally and vertically adjustable heads, 180° rotation across the horizontal plane
- IP65 rating utilising high quality polycarbonate enclosure: for installation in wet or dusty environments
- Reduced battery capacity requirement: allows a more compact design reducing the weight dramatically compared to traditional products facilitating easier installation
- Minimum 3 hour non-maintained functionality in emergency mode
- Individual indicator to show healthy charge to battery
- Earthed • Battery - Ni-Cd 3.6V 6Ah
- Battery 1 year warranty - Replacement battery code: EB3



Code	Wattage	Colour Temp.	Lumens	Avg. Rated Life (Hrs)	IP Rating	MOM / OPQ
LEDTWNSPOT	Twin 3W	3500K	441 lm	30,000 hrs	IP65	1 / 6


## LI-ION COMPACT LED EMERGENCY TWINSPOUT



5  
Year Warranty



- Polycarbonate construction • Push fit terminals • IES files available
- Individual indicator to show healthy charge to battery
- Horizontally and vertically adjustable heads, 180° rotation across the horizontal plane
- Minimum 3 hour functionality in emergency mode
- Double insulated • Battery: Li-Ion 3.2V 4500mAh
- Battery 5 year warranty - Replacement battery code: EB18



V1

Code	Wattage	Colour Temp.	Lumens	Avg. Rated Life (Hrs)	IP Rating	MOM / OPQ
KTWINSPLI	2W	6300K	420 lm	40,000 hrs	IP20	1 / 20

## LED EMERGENCY TWINSPOUT




5  
Year Warranty



**Reduced battery capacity requirement allows a more compact design reducing the weight dramatically compared to traditional products facilitating easier installation**

V1

- Polycarbonate construction • 3 hour non-maintained operation
- Individual indicator to show healthy charge to battery
- Horizontally and vertically adjustable heads, 180° rotation across the horizontal plane • IES files available
- Earthed • Battery - Ni-Cd 3.6V 4.5Ah
- Battery 1 year warranty - Replacement battery code: EB16



Code	Wattage	Colour Temp.	Lumens	Avg. Rated Life (Hrs)	IP Rating	MOM / OPQ
TSPOTLIP20	3.4W	6000K	405 lm	50,000 hrs	IP20	1 / 6


## COMPACT LED EMERGENCY TWINSPOUT



5  
Year Warranty



- Polycarbonate construction • Push fit terminals
- Individual indicator to show healthy charge to battery
- Horizontally and vertically adjustable heads, 180° rotation across the horizontal plane
- Minimum 3 hour functionality in emergency mode
- Double insulated • Battery: Ni-Cd 3.6V 4Ah
- Battery 1 year warranty - Replacement battery code: EB13




V1

Code	Wattage	Colour Temp.	Avg. Rated Life (Hrs)	IP Rating	MOM / OPQ
VECOTWINSP	2W	6300K	40,000 hrs	IP20	1 / 20
SETSPOT	Self Test Li-Ion version coming soon				

# EMERGENCY LIGHTING

## WHITE/SILVER 1.4W LED NON MAINTAINED EMERGENCY DOWNLIGHTS & SELF-TEST OPTION

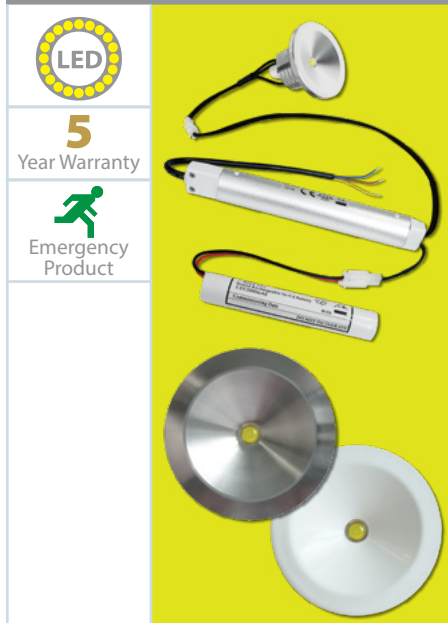

5  
Year Warranty




This LED compact recessed emergency light is ideal for use in corridors, stairwells and other places that require a smart, discreet emergency unit

V1


- Aluminium construction • Compact design
- Matt silver and white trims included • Pre-wired for easy installation
- LED glows green in standby mode and super bright white light in the event of a mains failure
- Excellent alternative to a converted downlight • Minimum 3 hour functionality in emergency mode
- Earthed • Battery - Ni-Cd 3.6V 2000mAh
- IES files available
- Battery 1 year warranty - Replacement battery code: EB2

**SELDLEM3:** Automatic testing in accordance with BS EN 62034

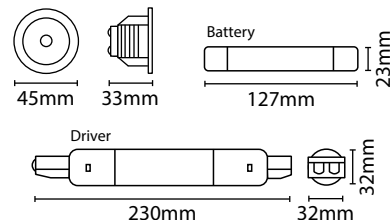

Code	Version	Wattage	Lumens	IP Rating	Hole Cut Out Size	MOM / OPQ
LDLEM3	Standard	1.4W	118 lm	IP20	32mm	1 / 20
SELDEM3	<b>Self Test</b>					

## WHITE/BLACK/SILVER **LI-ION** EMERGENCY 2W LED DOWNLIGHT

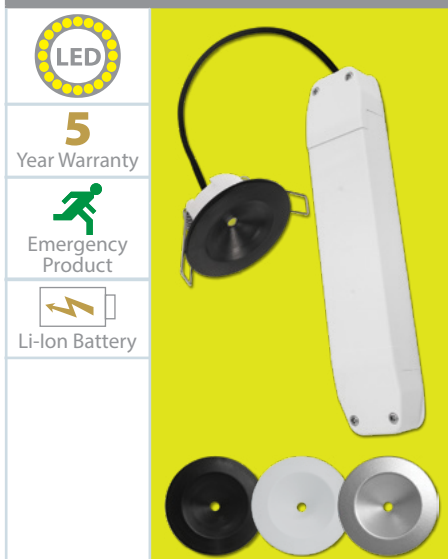


5  
Year Warranty



Unobtrusive emergency downlight with lightweight all-in-one compact control pack including Lithium battery technology


V1

- White, matt silver and black bezels included • IES files available
- LiFePO4 Lithium battery technology offering reduced energy consumption, enhanced charging cycle capacity & improved operational life compared to standard NiCad products
- Optic designed for open area and escape route lighting • Built-in battery overcharge protection
- 3 hour non maintained operation • Integrated green charging indicator LED
- Integral LED glows green in standby mode and super bright white light in the event of a mains failure
- Double insulated • Battery - Li-Ion 3.2V 1500mAh
- Battery 5 year warranty - Replacement battery code: EB19



Code	Wattage	Lumens	IP Rating	Hole Cut Out Size	MOM / OPQ
LDLEM3LI	2W	160 lm	IP20	50mm	1 / 40

## WHITE/BLACK/SILVER **LI-ION** EMERGENCY 2W LED DOWNLIGHT

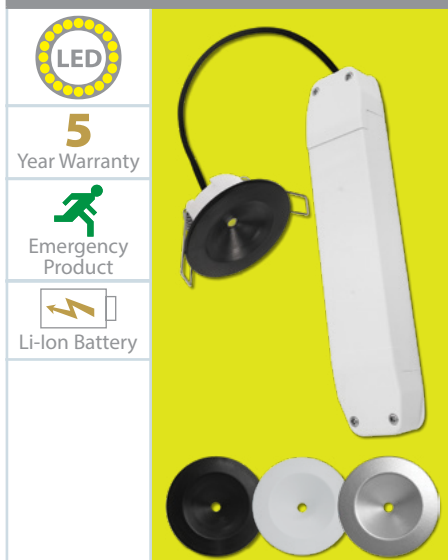


5  
Year Warranty



Unobtrusive emergency downlight with lightweight all-in-one compact control pack including Lithium battery technology


V1

- White, matt silver and black bezels included • IES files available
- LiFePO4 Lithium battery technology offering reduced energy consumption, enhanced charging cycle capacity & improved operational life compared to standard NiCad products
- Optic designed for open area and escape route lighting • Built-in battery overcharge protection
- 3 hour non maintained operation • Integrated green charging indicator LED
- Integral LED glows green in standby mode and super bright white light in the event of a mains failure
- Double insulated • Battery - Li-Ion 3.2V 1500mAh
- Battery 5 year warranty - Replacement battery code: EB19



Code	Wattage	Lumens	IP Rating	Hole Cut Out Size	MOM / OPQ
KEM3LIDL	2W	160 lm	IP20	50mm	1 / 40

# EMERGENCY LIGHTING

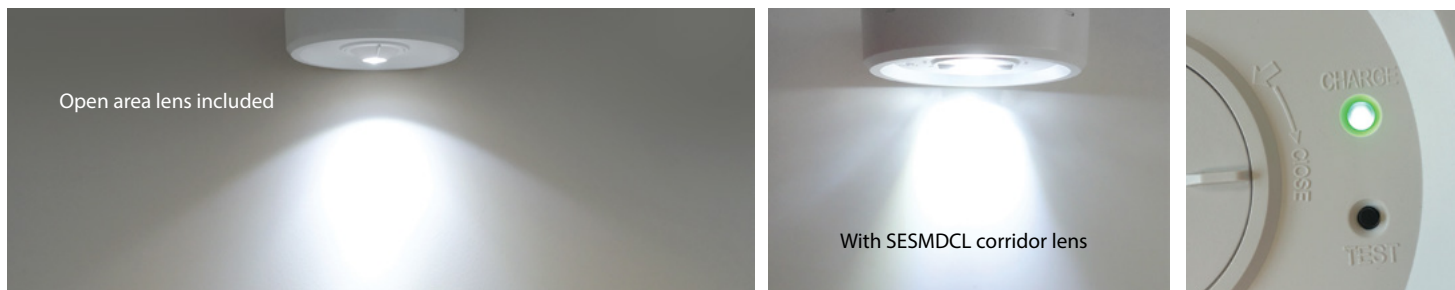


## SELF-TEST SURFACE MOUNT EMERGENCY DOWNLIGHT



High Quality, Self-Test emergency downlight, suitable for open area and corridor applications where solid ceilings exist V1

- Polycarbonate construction • Compact design • IES files available
- Automatic testing in accordance with BS EN 62034
- LED glows green in standby mode and super bright white light in the event of a mains failure
- Excellent solution where solid ceilings prevent recessed installation of an emergency downlight
- Minimum 3 hour functionality in emergency mode
- Supplied with open area lens. Corridor lens available separately - SESMDCL
- Earthed • Battery - Ni-Cd 3.6V 2000mAh
- Battery 1 year warranty - Replacement battery code: EB15




Code	Wattage	Lumens	IP Rating	MOM / OPQ
SESMDLEM3	3W	150 lm	IP20	1 / 20
SESMDCL	Corridor Lens			



## LED MULTI FIXING EXIT SIGN

- Polycarbonate construction • LED charge light and battery test button
- Comes complete with 4 fixing options - ceiling mounted, end mounted, wall mounted and suspended (adjustable length 1m suspension cable included)
- Supplied with a double-sided up arrow ISO 7010 format exit legend - full range of alternative legend directional panels available separately including signs directive format
- 3 hour maintained mode as standard which can also be configured for non-maintained or remote switched operation
- 35 lm (mains) / 25 lm (battery)
- Additional recessed option available with EXITREC
- Earthed • Battery - Ni-Cd 3.6V 800mAh
- Battery 1 year warranty - Replacement battery code: EB8

**EXITREC:** Hole cut out size: 360mm x 65mm

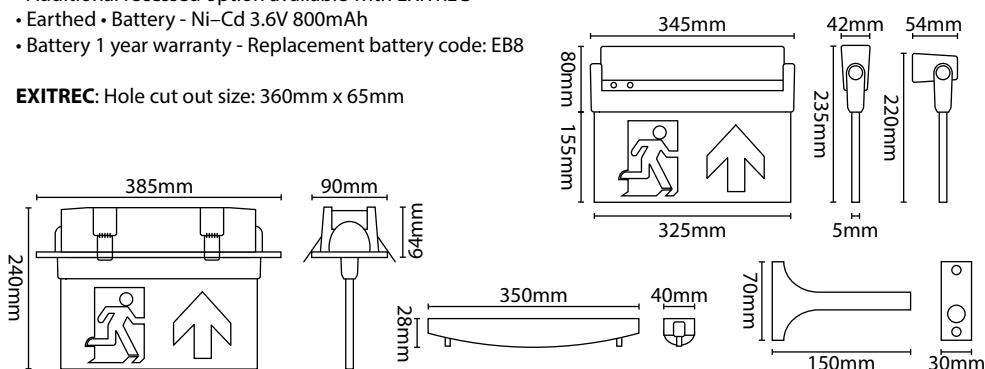

Code	Version	Wattage	Colour Temp.	Viewing Distance	IP Rating	MOM / OPQ
EXITMMO	Fitting	2.8W	6000K	30m	IP20	1 / 6
<b>Accessories</b>						
EXITREC	White Recessed Mounting Kit					1 / 25
ISOMMOLR	ISO 7010 Left/Right Arrow Legend					1 / 100
ISOMMOD	ISO 7010 Down Arrow Legend					
EMMOUP	Signs Directive Up Arrow Legend					
EMMOD	Signs Directive Down Arrow Legend					
EMMOLR	Signs Directive Left/Right Arrow Legend					



# EMERGENCY LIGHTING

## LED EMERGENCY HANGING EXIT SIGN LIGHT & **SELF-TEST** OPTION




**5**  
Year Warranty



- Polycarbonate construction • Test button and LED charge light • 171 lm
- Remote connection box complete with adjustable length suspension cable (max 80cm)
- 3 hour maintained mode as standard which can also be configured for non-maintained or remote switched operation
- Supplied with a double-sided exit legend - signs directive & ISO legends available separately (see below for versions)
- Earthed • Battery - Ni-Cd 3.6V 800mAh
- Battery 1 year warranty - Replacement battery code: EB8

V1



**SEIGNLEM3:** Automatic testing in accordance with BS EN 62034

Code	Version / Legend Set Included	Wattage	Colour Temp.	Avg. Rated Life (Hrs)	Viewing Distance	IP Rating	MOM / OPQ
SIGNLEDEM3	Signs Dir. Down Arrow	2.3W	6000K	25,000 hrs	29m	IP20	1 / 6
SEIGNLEM3	<b>Self Test</b> / ISO Up Arrow						1 / 6
<b>Accessories</b>							
SIGNLGD	Signs Directive Left/Right Arrow Legend						1 / 100
SIGNLGDUP	Signs Directive Up Arrow Legend						
ISOSIGND	ISO 7010 Down Arrow Legend						
ISOSIGNLR	ISO 7010 Left/Right Arrow Legend						



Our most versatile Exit Sign - EXITMMO - page 12



Helping your Emergency Lighting perform longer!....

## NEW - 5 year warranty on LiFePO4 Batteries

Like most competitors, we are unable to include batteries in extended warranties, but do feel it's unfair & not environmentally friendly that good fittings become redundant due to the battery reaching the end of its life.

We would firstly suggest that you follow our maintenance guidance (see below) on emergency products to maximise battery life, but would also like to offer the reassurance of a battery replacement service to support our current emergency product offer – we will try to help with legacy products but cannot guarantee availability.

Please note that in the unlikely event your new fitting is supplied with a faulty battery, we will replace the battery free of charge subject to our terms and conditions.

WE ONLY RECOMMEND ETERNA REPLACEMENT BATTERIES WITH ETERNA EMERGENCY PRODUCTS



Code	Version
EB1	Ni-Cd 3.6V 1500mAh Stick Battery
EB2	Ni-Cd 3.6V 2000mAh Stick Battery
EB3	Ni-Cd 3.6V 6Ah Side-by-side Battery
EB4	Ni-Cd 3.6V 1500mAh Side-by-side Battery
EB5	Ni-Cd 3.6V 4.5Ah Stick Battery
EB6	Ni-Cd 3.6V 1300mAh Stick Battery
EB7	Ni-Mh 3.6V 2000mAh Side-by-side Battery
EB8	Ni-Cd 3.6V 800mAh Side-by-side Battery
EB9	Ni-Cd 4.8V 600mAh Side-by-side Battery
EB10/2	Ni-Cd 6V 2000mAh Side-by-Side Battery
EB11	Li-ion 3.2V 1500mAh Stick Battery
EB12	Ni-Cd 3.6V 1500mAh Stick Battery
EB13	Ni-Cd 3.6V 4000mAh Side-by-side Battery

Code	Version
EB14	Ni-Cd 3.6V 1800mAh Stick Battery
EB15	Ni-Cd 3.6V 2Ah 3-Linked Battery
EB16	Ni-Cd 3.6V 4.5Ah Side by Side Battery
EB17	Li-Ion 3.2V 1500mAh Stick Battery
EB18	Li-Ion 3.2V 4500mAh Side-by-Side Battery
EB19	Li-Ion 3.2V 1500mAh Stick Battery
EB20	Li-Ion 6.4V 1500mAh Stick Battery
EB21	Ni-Cd 3.6V 800mAh Stick Battery
EB22	Li-Ion 3.2V 1000mAh Stick Battery
EB23	Li-Ion 3.2V 1000mAh Stick Battery
EB24	Li-Ion 3.2V 1000mAh Stick Battery
EB25	Li-Ion 3.2V 1000mAh Stick Battery
See website for more details	



## IMPORTANT OPERATIONAL CHECKS TO KEEP YOUR FITTING WORKING

Periodic testing should be carried out to ensure emergency lighting is operating correctly. For the period of the test, isolate the power supply by operation of a key switch, or other isolation device. At the end of the test, power should be restored and all indicator lamps checked.

**DAILY:** Visual inspection of the battery charge LED.

**EACH MONTH:** Isolate the power supply for a period sufficient to ensure that each lamp is illuminated. Endorse the test record form supplied.

**ONCE EACH YEAR:** Isolate the power supply and check that the light is still illuminated after 3 hours. Endorse the test record form.

## BATTERY REPLACEMENT

If after routine operation check, the lamp does not remain illuminated for the three hour period, a new battery pack may be required.


- 01) Switch off the electricity at the mains, both switched and permanent supply.
- 02) Allow batteries to fully discharge then reconnect to supply and allow to charge for 24 hours.
- 03) Test again for 3 hours, if light does not remain illuminated change the battery pack.
- 04) Check install guides for procedure on changing the battery.



DOWNLOAD AND PRINT EXTRA STANDARD AND SELF-TEST MAINTENANCE RECORD FORMS FOR **FREE** FROM OUR WEBSITE

[www.eterna-lighting.co.uk/battery-replacement-service](http://www.eterna-lighting.co.uk/battery-replacement-service)

# CEILING/WALL/BULKHEADS

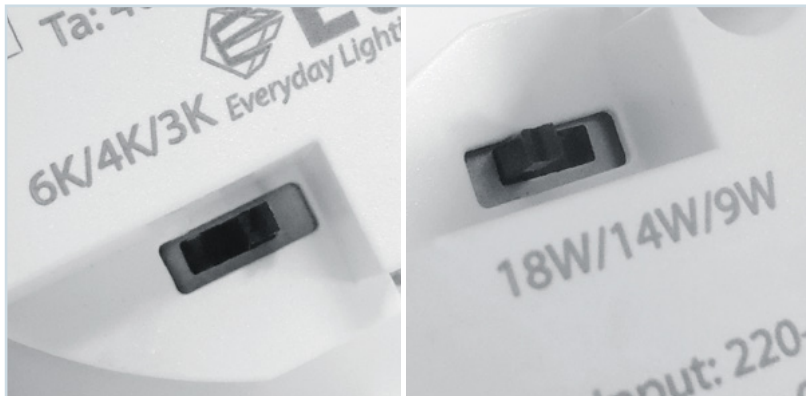

**POWER & COLOUR  
TEMPERATURE  
SELECTABLE  
UTILITY FITTINGS  
NOW AVAILABLE  
FROM ETERNA**

LOOK OUT FOR THE ICONS (RIGHT)





**ALL LED FITTINGS COME WITH A 5 YEAR WARRANTY**  
for more information see - [www.eterna-lighting.co.uk/warranties/](http://www.eterna-lighting.co.uk/warranties/)

## IK RATING

The IK code (Impact Protection Rating) classifies the level of protection an electrical equipment enclosure provides from external mechanical impacts. **FREE** IK guide can be downloaded and printed from our website: [www.eterna-lighting.co.uk/guides/](http://www.eterna-lighting.co.uk/guides/)

TO SEE THE PRODUCTS  
IK RATING LOOK OUT  
FOR THE ICON (RIGHT)

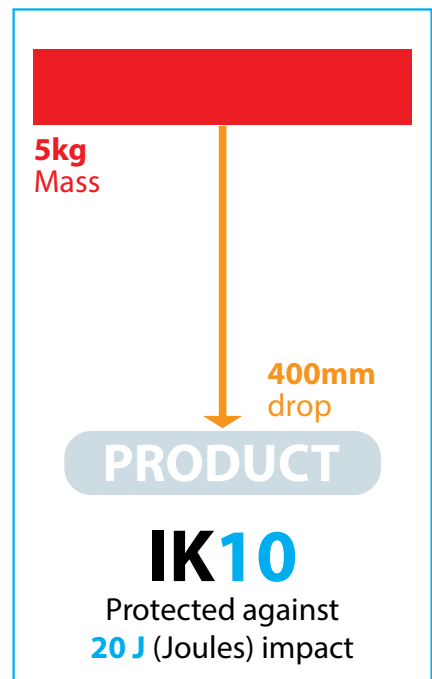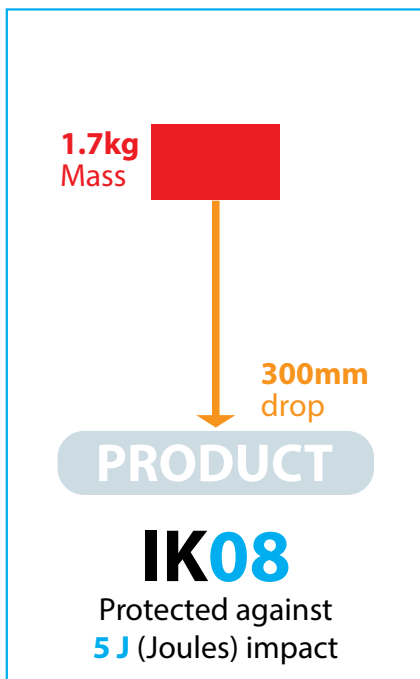

## FRESH PRINCE POWER AND COLOUR TEMPERATURE SELECTABLE CIRCULAR / SQUARE LED UTILITY FITTINGS & LI-ION EMERGENCY VERSIONS

V3



5  
Year Warranty



Li-Ion Battery



IK08



Colour Temp. Selectable



Microwave Sensor



High output, energy saving utility LED wall / ceiling fixtures with standard, emergency & multi-function microwave control versions. Both opal & prismatic versions are available for either smooth diffuser effect or maximum light output. Diffusers are supplied not fitted to bases and fully captive diffuser fixing screws are utilised to save installation time. Step Dim microwave versions provide the best in flexibility & energy saving options

- Polycarbonate construction
- Push fit terminals
- Hinged gear tray
- Captive fixing screws
- Four 20mm cable entries on the side and one to the rear
- Power Selectable - options of 9W, 14W and 18W easily set by a dip switch on the driver
- Colour temperature selectable - options of 3000K, 4400K & 6500K easily set by a dip switch on the driver
- Double insulated
- IES files available

### EMERGENCY VERSIONS:

- 3 hour maintained mode as standard which can also be configured for non maintained operation
- Battery - Li-Ion 3.2V 1500mAh • Battery 5 year warranty - Replacement battery code: EB11

### STEP DIM MICROWAVE VERSIONS:

- Daylight Sensor adjustable: 10 lux / disable • Detection Sensitivity adjustable: 50% / 100%
- Detection angle: 30~150° • Adjustable detection range: 4-6m at 3m installation height

### Standard on/off mode:


- Operation at 100% light level then off after last presence detection. Operation on time can be set at 5 sec, 90 sec, 3 min (180 sec), 10 min

### Corridor mode:

- Operation at 100% light level after last presence detection which can be set at 5 sec, 90 sec, 3 min (180 sec), 10 min, then continuous operation at 10% or 30% light level

### Corridor & off mode:

- Operation at 100% light level after last presence detection which can be set at 5 sec, 90 sec, 3 min (180 sec), 10 min, then operation at 10% or 30% light level which can be set at 10 sec / 10 min, then off



Code	Version	Colour Temp.	Lumens			Avg. Rated Life (Hrs)	IP / IK Rating	MOM / OPQ
			9W	14W	18W			
<b>CIRCULAR OPAL DIFFUSER</b>								
OPCIRSTD	Standard							
OPCIRMW	SD	3000K	1090 lm	1610 lm	1970 lm	50,000 hrs	IP65 IK08	1 / 8
OPCIREM3	EM3	4400K	1160 lm	1770 lm	2190 lm			
OPCIREM3	EM3	6500K	1130 lm	1700 lm	2080 lm			
OPCIRMW3	SD + EM3							
<b>CIRCULAR PRISMATIC DIFFUSER</b>								
PRCIRSTD	Standard							
PRCIRMW	SD	3000K	1180 lm	1715 lm	2055 lm	50,000 hrs	IP65 IK08	1 / 8
PRCIREM3	EM3	4400K	1270 lm	1890 lm	2270 lm			
PRCIREM3	EM3	6500K	1230 lm	1780 lm	2180 lm			
PRCIRMW3	SD + EM3							
<b>SQUARE OPAL DIFFUSER</b>								
OPSQSTD	Standard							
OPSQMW	SD	3000K	1080 lm	1630 lm	1980 lm	50,000 hrs	IP65 IK08	1 / 8
OPSQEM3	EM3	4400K	1150 lm	1770 lm	2200 lm			
OPSQEM3	EM3	6500K	1120 lm	1700 lm	2070 lm			
OPSQMW3	SD + EM3							
<b>SQUARE PRISMATIC DIFFUSER</b>								
PRSQSTD	Standard							
PRSQMW	SD	3000K	1150 lm	1730 lm	2100 lm	50,000 hrs	IP65 IK08	1 / 8
PRSQEM3	EM3	4400K	1250 lm	1870 lm	2360 lm			
PRSQEM3	EM3	6500K	1200 lm	1830 lm	2200 lm			
PRSQMW3	SD + EM3							





## FRESH PRINCE CIRCULAR / SQUARE LED UTILITY FITTINGS & LI-ION EMERGENCY VERSIONS



5  
Year Warranty



Emergency  
Product



Li-Ion Battery



IP65



IK08



Microwave  
Sensor



High output, energy saving utility LED wall / ceiling fixtures with standard, emergency & multi-function microwave control versions. Both opal & prismatic versions are available for either smooth diffused effect or maximum light output. Diffusers are supplied not fitted to bases and fully captive diffuser fixing screws are utilised to save installation time. Multi-function microwave versions provide the best in flexibility & energy saving options

- Polycarbonate construction • Push fit terminals • Full circular / square LED array • Hinged gear tray
- Captive fixing screws • Four 20mm cable entries on the side and one to the rear
- Earthed • IES files available

### EMERGENCY VERSIONS:


- 3 hour maintained mode as standard which can also be configured for non maintained operation
- Battery - Li-Ion 3.2V 1500mAh • Battery 5 year warranty - Replacement battery code: EB11

### MULTI-FUNCTION MICROWAVE SENSOR VERSIONS:

- Detection sensitivity adjustable - 10/50/75/100% • Daylight sensor adjustable - 5/15/50 Lux/Disable
- Mounting height - maximum 6m • Detection zone - maximum 16m diameter x 6m height
- Detection angle - 150° (wall mounted), 360° (ceiling mounted)

### MULTI-FUNCTION MICROWAVE SENSOR WITH 3 INSTALLER OPTIONS:


- **Standard On/Off Mode:** operation at 100% light level then off after last presence detection. Operation on time can be set at 5 seconds/90 seconds/3 minutes/10 minutes
- **“Corridor Mode”:** operation at 100% light level after last presence detection which can be set at 5 seconds/90 seconds/3 minutes/10 minutes, then continuous operation at 10% light level
- **“Corridor” & Off Mode:** operation at 100% light level after last presence detection which can be set at 5 seconds/90 seconds/3 minutes/10 minutes, then operation at 10% light level which can be set at 30 seconds or 10 minutes, then off




Code	Version	Wattage	Colour Temp.	Diffuser / Lumens	Avg. Rated Life (Hrs)	IP / IK Rating	MOM / OPQ
<b>CIRCULAR FITTINGS</b>							
CIROPALSTD	Standard	18W	4000K	Opal 1400 lm	35,000 hrs	IP65 IK08	1 / 1
<b>SQUARE FITTINGS</b>							
SQOPALSTD	Standard	18W	4000K	Opal 1400 lm	35,000 hrs	IP65 IK08	1 / 1
SQOPALMW	MW						
SQOPALMW3	MW + EM3						
SQPRISMW	MW			Prismatic 1600 lm			

V2

# CEILING/WALL/BULKHEADS

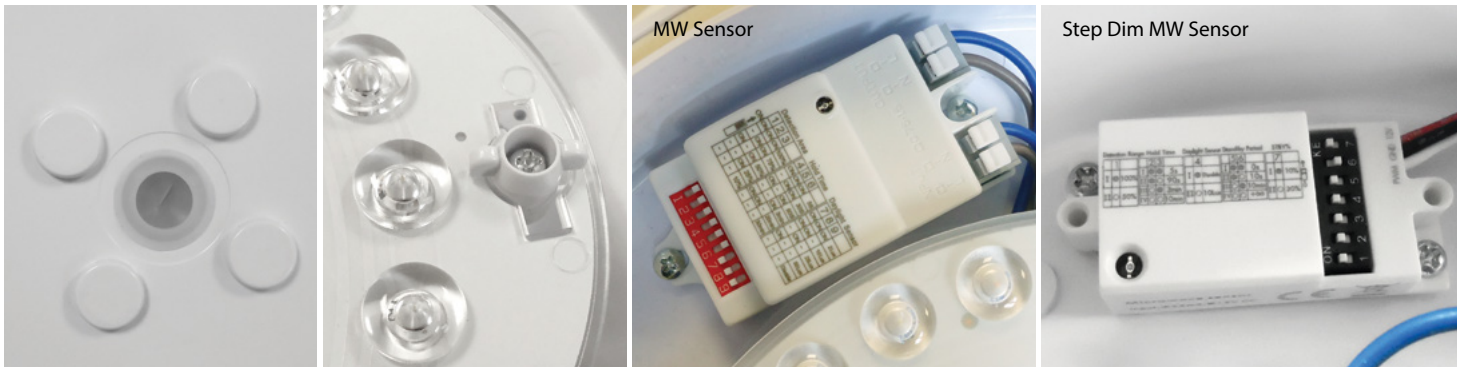

## CHARA POWER AND COLOUR TEMPERATURE SELECTABLE CIRCULAR LED CEILING/WALL LIGHTS & LI-ION EMERGENCY VERSIONS

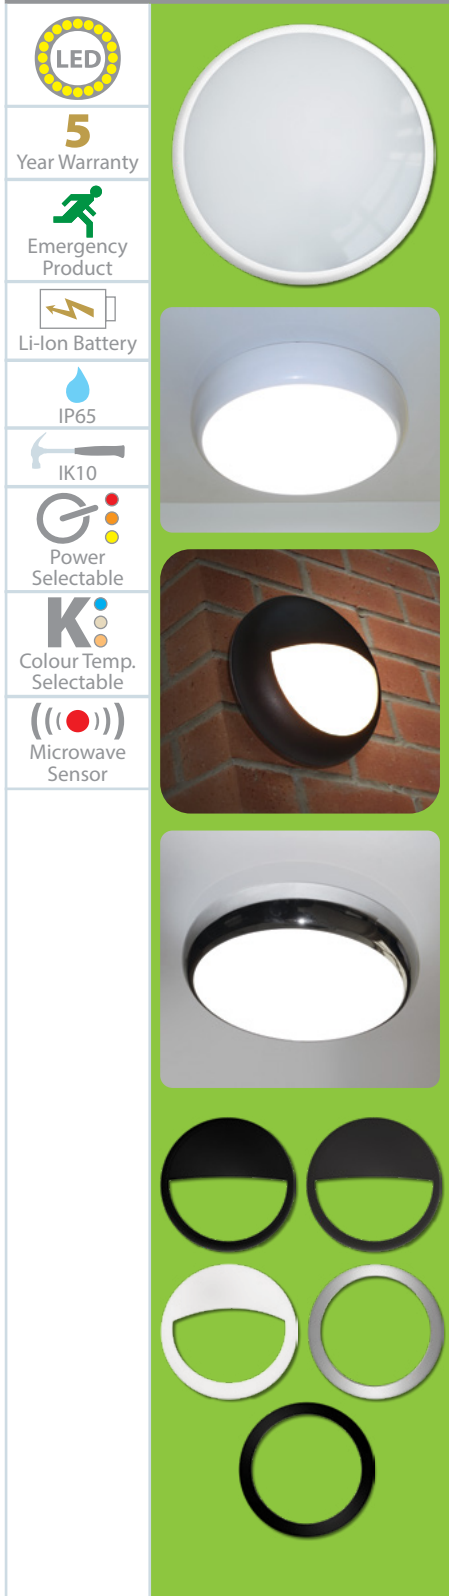

Offering 3 selectable power levels and 3 selectable colour temperatures, this versatile range offers the ultimate in practicality and multiple options from a single product. Suitable for interior or exterior installation the range of accessories ensures suitability for functional or decorative applications V1

- All fittings come with a white full trim • Hinged LED array • Push fit terminal block • Polycarbonate diffuser
- Optional accessories available separately: black, white and grey eyelid trims or full chrome trim
- Power Selectable - options of 9W, 14W and 18W easily set by a dip switch on the driver
- Colour temperature selectable - options of 3000K, 4400K & 6500K easily set by a dip switch on the driver
- Enclosure rated as IK10 for impact resistance • Central BESA box mounting option on the base
- Double insulated • IES files available

### EMERGENCY VERSIONS:

- 3 hour maintained mode as standard which can also be configured for non maintained operation
- Battery - Li-Ion 3.2V 1500mAh • Battery 5 year warranty - Replacement battery code: EB11

### STANDARD ON/OFF MICROWAVE SENSOR VERSIONS:

- Adjustable detection angle: up to 150° • Adjustable detection range: Max. 4-6m at 3m installation height
- Adjustable time setting: 5 seconds - 30 minutes • Adjustable Lux control: 2/10/25/50 lux or disable
- Detection is possible through doors, glass panels & thin walls

### STEP DIM MICROWAVE VERSIONS:

- Daylight Sensor adjustable: 10 lux / disable • Detection Sensitivity adjustable: 50% / 100%
- Detection angle: 30~150° • Adjustable detection range: 4-6m at 3m installation height

### Standard on/off mode:


- Operation at 100% light level then off after last presence detection. Operation on time can be set at 5 sec, 90 sec, 3 min (180 sec), 10 min

### Corridor mode:

- Operation at 100% light level after last presence detection which can be set at 5 sec, 90 sec, 3 min (180 sec), 10 min, then continuous operation at 10% or 30% light level


### Corridor & off mode:

- Operation at 100% light level after last presence detection which can be set at 5 sec, 90 sec, 3 min (180 sec), 10 min, then operation at 10% or 30% light level which can be set at 10 sec / 10 min, then off



Code	Version	Colour Temp.	Lumens			Avg. Rated Life (Hrs)	IP / IK Rating	MOM / OPQ
			9W	14W	18W			
CHA18STD	Standard	3000K 4400K 6500K	1000 lm 1100 lm 1100 lm	1500 lm 1670 lm 1640 lm	1880 lm 2130 lm 2050 lm	40,000 hrs	IP65 IK10	1 / 10
CHA18MW	MW							
CHA18EM3	EM3							
CHA18MW3	MW + EM3							
CHA18SD	SD							
CHA18SDEM3	SD + EM3							
CHAEYEBK	Black Eyelid Trim							1 / 1
CHAEYEGY	Grey Eyelid Trim							
CHAEYEWB	White Eyelid Trim							
CHAFULLBK	Black Full Trim							
CHAFULLCR	Chrome Full Trim							

# CEILING/WALL/BULKHEADS

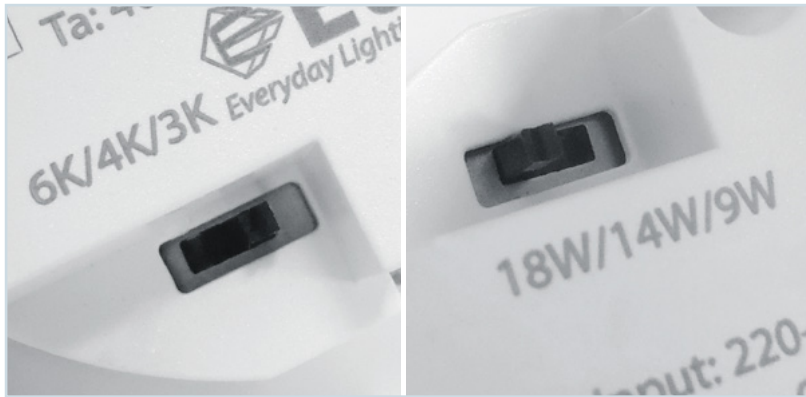

**POWER & COLOUR  
TEMPERATURE  
SELECTABLE  
UTILITY FITTINGS  
NOW AVAILABLE  
FROM ETERNA**  
LOOK OUT FOR THE ICONS (RIGHT)



## CHARA COLOUR TEMPERATURE SELECTABLE CIRCULAR LED CEILING/WALL LIGHTS & LI-ION EMERGENCY VERSIONS



- Polycarbonate diffuser
- Hinged LED array • Push fit terminal block • All fittings come with a white full trim
- Colour temperature selectable - options of 3000K, 4200K & 6000K easily set by a dip switch on the driver
- Enclosure rated as IK10 for impact resistance • Central BESA box mounting option on the base
- Double insulated • IES files available


V2

### EMERGENCY VERSIONS:

- 3 hour maintained mode as standard which can also be configured for non maintained operation
- Battery - Li-Ion 3.2V 1500mAh • Battery 5 year warranty - Replacement battery code: EB11

### MICROWAVE SENSOR VERSION:

- Rated Load - 800W (resistive), 400W (inductive), 270W (LED) • Adjustable detection angle: up to 150°
- Power consumption: <0.5W • Adjustable detection range: Max. 6m
- Adjustable time setting: 5 seconds - 30 minutes
- Adjustable Lux control: 2-50 lux
- Push connect terminals: for ease of connection



Code	Version	Wattage	Colour Temp.	Lumens	Avg. Rated Life (Hrs)	IP / IK Rating	MOM / OPQ
KCIRSTD	Standard	14W	3000K 4200K 6000K	1560 lm 1670 lm 1600 lm	50,000 hrs	IP65 IK10	1 / 10
KCIRMW	MW						
KCIREM3	EM3						
KCIRMW3	MW + EM3						
KCIREYEBK	Black Eyelid Trim						1 / 1
KCIREYEGY	Grey Eyelid Trim						
KCIREYEW	White Eyelid Trim						
KCIRFULLBK	Black Full Trim						
KCIRFULLCR	Chrome Full Trim						

## CARINA SLIMLINE LED CEILING/WALL FITTINGS




**More compact, lower power version of our hugely popular Carina range. Ideal where a discreet appearance is required**

V1

- Full circular LED array & optically optimised diffuser • Ceiling or wall mounted
- Push fit terminal block & gear tray retaining strap for quick and easy installation
- Double insulated • IES files available

### MICROWAVE SENSOR VERSIONS:


- Ambient light level adjustment 2-50 lux or disable
- Detection range 10-100% • Time on 5 secs-15 mins



Code	Version	Wattage	Colour Temp.	Lumens	Avg. Rated Life (Hrs)	IP Rating	MOM / OPQ
CFLEDMINSC	Standard	9W	4200K	875 lm	40,000 hrs	IP65	1 / 10
MSLEDMINSC	MW						



## CARINA LED COLOUR SELECTABLE FITTINGS & LI-ION EMERGENCY VERSIONS

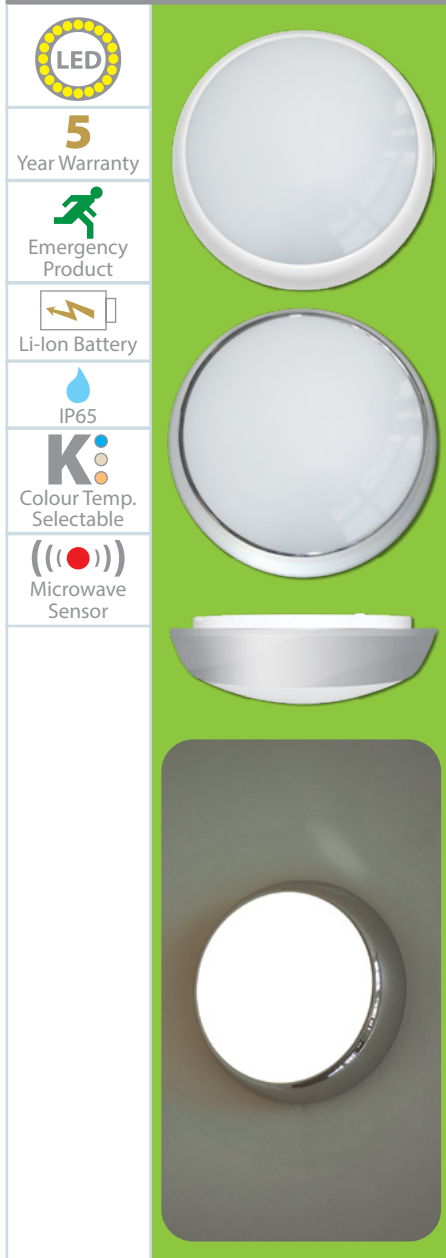

5  
Year Warranty



Emergency Product



Li-Ion Battery



IP65



Colour Temp. Selectable



Microwave Sensor

Versatile range of decorative bulkheads, offering practicality and style with multiple functional options

V1

- Polycarbonate construction • Full circular LED array • IP65, ceiling or wall mounted
- Colour temperature selectable - options of 3100K, 4200K & 6400K easily set by a dip switch on the gear tray
- Plug in connector between the terminal block and the gear tray. Terminal block is located on the base, allowing for easy wiring and the gear tray to be removed during installation
- Double insulated • IES files available

### EMERGENCY VERSIONS:


- 3 hour maintained mode as standard which can also be configured for non maintained operation
- Battery - Li-Ion 3.2V 1500mAh • Battery 5 year warranty - Replacement battery code: EB11

### MICROWAVE SENSOR VERSIONS:

- Adjustable microwave sensor: with options to adjust 2-50 lux or disable, detection range 10-100% and time 5 secs - 15 mins
- The microwave sensor is discreetly placed behind the diffuser: making it unobtrusive so there is no compromise to the appearance of the fitting or the room design

### 10% STEP DIM MICROWAVE SENSOR VERSIONS:

- Operation at 100% light level after last presence detection, reducing to 10% light output after installer selected time delay
- Delay time to 10% operation adjustable: 5 sec / 30 sec / 1 min / 5 min / 15 min / 30 min
- 30~150° detection angle
- 12~18m adjustable detection range: 100% / 75% / 50% / 25% / 10%
- Detection is possible through doors, glass panels and thin walls



Code	Colour	Version	Wattage	Colour Temp.	Lumens	Avg. Rated Life (Hrs)	IP Rating	MOM / OPQ
CSLEDCR	Chrome	Standard	17W	3100K 4200K 6400K	1250 lm 1350 lm 1300 lm	35,000 hrs	IP65	1 / 8
CSLEDWH	White							
CSLEDCREM3	Chrome	EM3						
CSLEDWHEM3	White							
MSCSLEDCR	Chrome	MW						
MSCSLEDWH	White							
MSCSLCREM3	Chrome	MW + EM3						
MSCSLWHEM3	White							
SDCSLEDCR	Chrome	SD						
SDCSLCREM3	Chrome	SD + EM3						
SDCSLWHEM3	White							

## CARINA LED CEILING/WALL LIGHTS & LI-ION EMERGENCY VERSIONS



5  
Year Warranty



Emergency Product



Li-Ion Battery



IP65



Microwave Sensor

- Polycarbonate construction • Visually similar, energy efficient alternative to 28W 2D fittings
- Multiple low power LED array & optically optimised diffuser: ensures a soft lighting effect with no degradation of light output
- Earthed • IES files available


V2

### EMERGENCY VERSIONS:

- 3hr maintained emergency lighting: also available in non-emergency options
- Facility for non-maintained mode
- Battery - Li-Ion 3.2V 1500mAh • Battery 5 year warranty - Replacement battery code: EB11

### MICROWAVE SENSOR VERSIONS:

- Adjustable detection angle: up to 150° • Adjustable detection range: Max. 4-6m at 3m installation height
- Adjustable time setting: 5 seconds - 30 minutes • Adjustable Lux control: 2/10/25/50 lux or disable
- Detection is possible through doors, glass panels & thin walls



Code	Version	Wattage	Colour Temp.	Lumens	Avg. Rated Life (Hrs)	IP Rating	MOM / OPQ
CFLEDWHSC	Standard	17W	4000K	1843 lm	50,000 hrs	IP65	1 / 8
MSLEDWHSC	MW						
CFLWHEM3SC	EM3						
MSLWHEM3SC	MW + EM3						



# CEILING/WALL/BULKHEADS




Photocell



CO18 shown with prismatic diffuser CPRIS



## CHAMELEON IP65 CIRCULAR LED MODULAR FITTINGS & LI-ION EMERGENCY VERSIONS

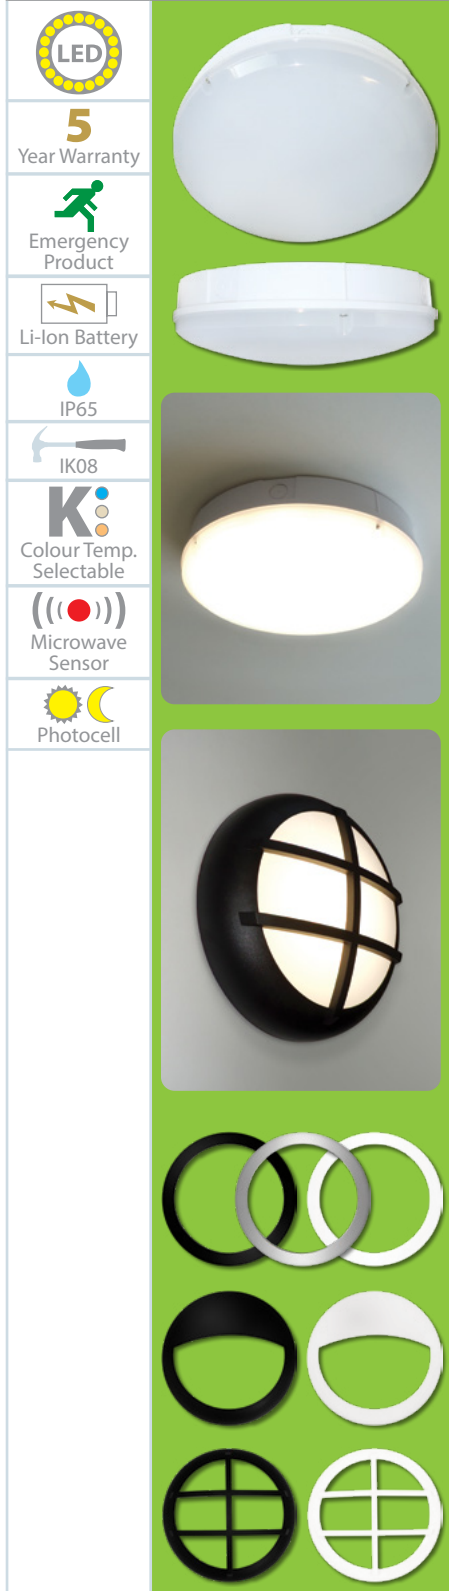

5 Year Warranty



Emergency Product



Li-Ion Battery



IP65



IK08



Colour Temp. Selectable



Microwave Sensor



Photocell

A flexible range of LED wall/ceiling fittings with standard, emergency, microwave, microwave emergency and photocell variants. The ability to easily choose the colour temperature to suit the installation is complimented with the accessories available. The accessories enable you to transform the fittings from utility to decorative. Along with different colour options to suit the application as required

V1

- Polycarbonate diffuser • Circular LED array • Push fit terminal block • Stainless steel captive fixing screws
- Colour temperature selectable - options of 3100K, 4200K & 6400K easily set by dip switches
- Four 20mm cable entries on the side and one to the rear • Double insulated • IES files available

### EMERGENCY VERSIONS:


- 3 hour maintained mode as standard which can also be configured for non maintained operation
- Battery - Li-Ion 3.2V 1500mAh • Battery 5 year warranty - Replacement battery code: EB11

### PHOTOCELL VERSIONS:

- Photocell for dusk to dawn operation • Photocell version cannot be used with any of the trims

### MICROWAVE SENSOR VERSIONS:

- Adjustable microwave sensor: with options to adjust 2-50 lux or disable, detection range 10-100% and time 5 secs - 15 mins
- The microwave sensor is discreetly placed behind the diffuser: making it unobtrusive so there is no compromise to the appearance of the fitting or the room design




Code	Version	Wattage	Colour Temp.	Lumens	Avg. Rated Life (Hrs)	IP / IK Rating	MOM / OPQ
<b>12W Single Colour Temperature</b>							
CO12SCPC	Photocell	12W	4200K	1200 lm	35,000 hrs	IP65 IK08	1 / 10
<b>12W Colour Temperature Selectable</b>							
CO12	Standard	12W	3100K 4200K 6400K	1180 lm 1290 lm 1230 lm	40,000 hrs	IP65 IK08	1 / 10
CO12EM3	EM3						
CO12MW	MW						
CO12MW3	MW + EM3						
CO12PC	Photocell						
<b>18W Colour Temperature Selectable</b>							
CO18	Standard	18W	3100K 4200K 6400K	1580 lm 1640 lm 1600 lm	35,000 hrs	IP65 IK08	1 / 10
CO18EM3	EM3						
CO18MW	MW						
CO18MW3	MW + EM3						
CO18PC	Photocell						
<b>Accessories</b>							
GRILLWH	White Grill Trim						1 / 50
GRILLBK	Black Grill Trim						
EYEWH	White Eyelid Trim						
EYEBK	Black Eyelid Trim						
CIRCWH	White Full Trim						
CIRCBK	Black Full Trim						
CIRCCR	Chrome Full Trim						
CPRIS	Prismatic Diffuser						

## CASSI LED CEILING/WALL FITTINGS



- Polycarbonate diffuser • IES files available
- Stainless Steel captive fixing screws
- 20mm cable entry on back of fitting
- Push fit terminal block • Double insulated



V1

Code	Colour	Version	Wattage	Colour Temp.	Lumens	Avg. Rated Life (Hrs)	IP / IK Rating	MOM / OPQ
KCAS8WHFL	White	Full Diffuser	8W	4000K	855 lm	30,000 hrs	IP54 IK08	1 / 40
KCAS8BKFL	Black				1480 lm			
KCAS14WHFL	White				Louvered Trim			14W
KCAS14BKFL	Black							
KCAS14WHLV	White							
KCAS14BKLV	Black							

## SPARROWHAWK STANDARD / EYELID LED DIFFUSER AMENITY CEILING/WALL LIGHTS




Long life, energy efficient utility fitting perfect for domestic or commercial settings including perimeter lighting, paths, gardens and porches, communal areas, staircases and many more

- Polycarbonate / ABS construction • Stainless steel screws • IP66 ceiling or wall mounted
- Multiple low power LED array & optically optimised diffuser: ensures a soft, even lighting effect with no degradation of light output • Double insulated • IES files available

### MICROWAVE VERSIONS:

- SENSORMW included
- Rated Load - 800W (resistive), 400W (inductive), 270W (LED)
- Adjustable detection angle: up to 150° • Power consumption: <0.5W
- Adjustable detection range: Max. 6m • Adjustable time setting: 5 seconds - 30 minutes
- Adjustable Lux control: 2-50 lux • Push connect terminals: for ease of connection



V5


Code	Colour	Diffuser	Wattage	Colour Temp.	Lumens	Avg. Rated Life (Hrs)	IP / IK Rating	MOM / OPQ
<b>Standard</b>								
SHFULLBK	Black	Full	11W	4000K	1150 lm	50,000 hrs	IP66 IK08	1 / 10
SHFULLWH	White				790 lm			
SHEYBK	Black	Eyelid	11W	4000K	790 lm	50,000 hrs	IP66 IK08	1 / 10
SHEYWH	White							
<b>Microwave</b>								
SHFULLMWBK	Black	Full	11W	4000K	1150 lm	50,000 hrs	IP66 IK08	1 / 10
SHFULLMWH	White				790 lm			
SHEYMWBK	Black	Eyelid	11W	4000K	790 lm	50,000 hrs	IP66 IK08	1 / 10

## SPARROWHAWK MINI LED AMENITY FITTINGS



Long life, energy efficient utility fitting perfect for domestic or commercial settings including pathway illumination, gardens and porches, staircases and many more

- Polycarbonate construction • Instant start to full illumination level • Stainless steel screws
- Multiple low power LED array & optically optimised diffuser: ensures a soft, even lighting effect with no degradation of light output
- 4200K colour temperature: for bright neutral white appearance
- IP66 ceiling or wall mounted: giving versatile fixing options suitable for bathroom, internal and external use
- Double insulated



V2

Code	Colour	Diffuser	Wattage	Colour Temp.	Lumens	Avg. Rated Life (Hrs)	IP / IK Rating	MOM / OPQ
MINIFULLWH	White	Full	6W	4200K	530 lm	50,000 hrs	IP66 IK08	1 / 10
MINIEYBK	Black	Eyelid			445 lm			

## LED ALUMINIUM WALL LIGHTS & **LI-ION** EMERGENCY VERSIONS

V1

-  LED
-  5 Year Warranty
-  Emergency Product
-  Li-Ion Battery
-  IP65
-  IK10
-  Microwave Sensor



Superior range of die-cast aluminium fittings offering multiple functions and trim options suitable for outdoor applications where performance, style and durability are required. Modern and robust design with options

- Die-cast aluminium base and bezel • Polycarbonate diffuser • Full circular/eyelid LED array
- Plug in connector between the terminal block and the gear tray. Terminal block is located on the base, allowing for easy wiring and the gear tray to be removed during installation • IES files available
- Four 20mm cable entries • Tamper-proof, captive, stainless steel allen key screws • Earthed

### EMERGENCY VERSIONS:


- 3 hour maintained mode as standard which can also be configured for non-maintained operation
- Battery - Li-Ion 3.2V 1500mAh • Battery 5 year warranty - Replacement battery code: EB11

### MULTI-FUNCTION MICROWAVE SENSOR VERSIONS:

- Detection sensitivity adjustable - 10/50/75/100% • Daylight sensor adjustable - 5/15/50 Lux/Disable
- Mounting height - maximum 6m • Detection zone - maximum 16m diameter x 6m height
- Detection angle - 150° (wall mounted), 360° (ceiling mounted)

### MULTI-FUNCTION MICROWAVE SENSOR WITH 3 INSTALLER OPTIONS:

- **Standard On/Off Mode:** operation at 100% light level then off after last presence detection. Operation on time can be set at 5 seconds/90 seconds/3 minutes/10 minutes
- **“Corridor Mode”:** operation at 100% light level after last presence detection which can be set at 5 seconds/90 seconds/3 minutes/10 minutes, then continuous operation at 10% light level
- **“Corridor” & Off Mode:** operation at 100% light level after last presence detection which can be set at 5 seconds/90 seconds/3 minutes/10 minutes, then operation at 10% light level which can be set at 30 seconds or 10 minutes, then off



Code	Colour	Version	Wattage	Colour Temp.	Lumens	Avg. Rated Life (Hrs)	IP / IK Rating	MOM / OPQ
<b>Full Trim</b>								
ALMFWHFUL	White	MW	18W	4200K	1400 lm	35,000 hrs	IP65 IK10	1 / 1
<b>Eyelid Trim</b>								
ALMFWHEYE	White	MW	18W	4200K	1300 lm	35,000 hrs	IP65 IK10	1 / 1
ALMF3WHEYE	White	MW + EM3						
<b>Grill Trim</b>								
ALSTDBKGRI	Black	Standard	18W	4200K	1400 lm	35,000 hrs	IP65 IK10	1 / 1
ALSTDWHGRI	White							
ALEM3WHGRI	White	EM3						
ALMFBKGRI	Black	MW						
ALMFWHGRI	White							
ALMF3BKGRI	Black	MW + EM3						
ALMF3WHGRI	White							

## POLISHED CHROME IP44 LED CEILING/WALL LIGHT


V1

-  LED
-  5 Year Warranty
-  IP44
-  Bathroom Zone 2



This stylish fitting is ideal for installation in a multitude of situations. Ceiling or wall mounted in a domestic or commercial setting and suitable for bathrooms. Long life, energy efficient alternative to traditional fluorescent luminaires

- Steel construction • Polished chrome finish • Corrosion resistant stainless steel fixing screws
- Multiple low power LED array & optically optimised diffuser: ensures a soft, even lighting effect with no degradation of light output
- Suitable for bathroom use • Push fit terminals
- 3100K warm colour temperature: offering a pleasing light appearance
- Earthed



Code	Wattage	Colour Temp.	Lumens	Avg. Rated Life (Hrs)	IP Rating	MOM / OPQ
PACIFIC12	12W	3100K	800 lm	30,000 hrs	IP44	1 / 5

# CEILING/WALL/BULKHEADS

## LED COLOUR TEMPERATURE SELECTABLE SLIM WALL PACKS



5  
Year Warranty



IP65



Colour Temp. Selectable




Photocell

**Slim profile, durable and high performance colour selectable wall pack offering reliability for outdoor utility applications**

V1

- Colour temperature selectable - options of 3000K, 4000K & 6000K easily set by a dip switch on the driver • Up to 90 lm/W
- ABS base and polycarbonate diffuser • Slim design
- Opal diffuser: evenly diffused light output • Double insulated
- 20mm cable entries on either side and one to the rear • IES files available



**PHOTOCELL VERSIONS:** Photocell for dusk to dawn operation

Code	Colour	Version	Wattage	Colour Temp.	Lumens	Avg. Rated Life (Hrs)	IP Rating	MOM / OPQ
WPCSBK	Black	Standard	17W	3000K 4000K 6000K	1500 lm 1550 lm 1530 lm	36,000 hrs	IP65	1 / 10
WPCSWH	White							
WPCSBKPC	Black	Photocell						
WPCSWHPC	White							

## LED BULKHEADS



5  
Year Warranty



IP65




Photocell

**Robustly constructed, reliable wall fitting offering more discreet illumination for utility applications**

V2

- Tough polycarbonate housing • Hinged diffuser
- Opal diffuser: evenly diffused light output
- Corrosion resistant stainless steel cover fixing screws
- Cable channel on reverse of fitting with 20mm knockout conduit entries
- Double insulated • IES files available



**BULKLEDPC:** Integral photocell: automatic dusk to dawn operation

Code	Version	Wattage	Colour Temp.	Lumens	Avg. Rated Life (Hrs)	IP Rating	MOM / OPQ
BULKLED	Standard	12W	6500K	1250 lm	30,000 hrs	IP65	1 / 12
BULKLEDPC	Photocell						

## INTEGRATED LED BULKHEADS



5  
Year Warranty



IP65



IK08




Photocell

**Robustly constructed & suitable for multiple commercial use where performance and functionality are required**

V1

- Captive stainless steel screws • Tough polycarbonate housing
- 20mm knockouts side and rear • Earthed
- IES files available



**PHOTOCELL VERSION:** photocell for dusk to dawn operation

Code	Version	Wattage	Colour Temp.	Lumens	Avg. Rated Life (Hrs)	IP / IK Rating	MOM / OPQ
WPACKLED	Standard	30W	4200K	2000 lm	30,000 hrs	IP65 IK08	1 / 4
WPACKLEDPC	Photocell						

## BULKHEAD WITH 120° PIR



1  
Year Warranty



IP44




120° PIR

- ABS construction
- Requires suitable BC energy saving lamp (not included). Fitting is rated at 60W max
- Vertically & horizontally adjustable detector • 12 metre range • 120° detection zone
- Time on adjustable (10±5) sec - (4±1) min • Factory preset PIR - no override facility
- Adjustable LUX level • Earthed

V1

Code	Wattage	IP Rating	MOM / OPQ
PIR80BK	60W Max	IP44	1 / 20





# CEILING/WALL/BULKHEADS



## LED BULKHEADS



**5**  
Year Warranty




Energy efficient LED alternative to traditional bulkheads with PIR option that offers durability for domestic and light commercial applications

- Tough polycarbonate housing • Double insulated

### PIR VERSION:

- Time on adjustment 5 secs - 5 mins • Lux level adjustments
- 120° detection angle • 8 metre detection range



Code	Version	Wattage	Colour Temp.	Lumens	Avg. Rated Life (Hrs)	IP Rating	MOM / OPQ
BLEDBK	Standard	7W	3100K	500 lm	35,000 hrs	IP44	1 / 10
BLEDPIRBK	120° PIR						

## LED BULKHEADS WITH OPAL DIFFUSER




**5**  
Year Warranty



Highly efficient 104 lm/W, super bright general purpose bulkhead

- Tough polycarbonate construction • Opal diffuser • Double insulated
- Three 20mm knock-out conduit entry positions, one each end and one on rear

**KRECBOLPC:** Integral photocell: automatic dusk to dawn operation



Code	Version	Wattage	Colour Temp.	Lumens	Avg. Rated Life (Hrs)	IP Rating	MOM / OPQ
KRECBOLPL	Standard	10W	4000K	1045 lm	40,000 hrs	IP65	1 / 10
KRECBOLPC	Photocell						

## ATOM LED BULKHEAD




**5**  
Year Warranty



Highly cost effective, compact, ultra low energy, modern design utility bulkhead

- Instant start to full illumination level: giving crisp, super bright light output
- Polycarbonate construction: impact and corrosion resistant
- External fixing points: for quick & easy installation
- 3 x 20mm cable entries: offering multiple installation options
- Compact design • Double insulated



Code	Wattage	Colour Temp.	Lumens	Avg. Rated Life (Hrs)	IP Rating	MOM / OPQ
ATOM5	6W	4200K	450 lm	25,000 hrs	IP65	1 / 20


## BULKHEAD WITH E27 LAMPHOLDER



**1**  
Year Warranty



- Requires 1 x suitable E27 lamp (not included). Fitting is rated at 100W max
- Easy connection directly into the lampholder
- Polycarbonate and ABS construction: impact and corrosion resistant
- Pre-formed 20mm cable entry knockouts on each end and one on rear
- IP65 - suitable for internal and external use
- Double insulated



Code	Wattage	IP / IK Rating	MOM / OPQ
BH100E27	100W Max	IP65 / IK08	1 / 10

## SURFACE LED WALL LIGHTS



5

Year Warranty



IP65



160° PIR




- Polycarbonate construction suitable for coastal areas • Opal diffuser • Integral driver • Double insulated
- Downward facing opal diffuser gives a pleasing wall washed effect • IES files available

V1

### PIR VERSIONS:

- PIR Time on adjustment 5 secs - 8 mins • 160° detection angle
- 8 meter detection range
- Lux level adjustments - option for day and night time operation or night time operation only



Code	Colour	Version	Wattage	Colour Temp.	Lumens	Avg. Rated Life (Hrs)	IP Rating	MOM / OPQ
VECOWLW	White	Standard	6W	4000K	340 lm	30,000 hrs	IP65	1 / 20
VECOWLG	Grey							
VECOWLPIRW	White	160° PIR						
VECOWLPIRG	Grey							

## LED SLIM SURFACE BRICKLIGHT



5

Year Warranty




IP65



Superslim surface mounting mains voltage LED amenity fixtures for garden and path illumination, which offers a fantastic alternative to traditional bricklights without the hassle of recessed installation

V1

- ABS housing, polycarbonate diffuser
- Double insulated
- IES files available



Code	Wattage	Colour Temp.	Lumens	Avg. Rated Life (Hrs)	IP Rating	MOM / OPQ
SLICELONG	3W	4000K	188 lm	30,000 hrs	IP65	1 / 24

## LED RECESSED BRICKLIGHT WITH STAINLESS STEEL FRAME



5

Year Warranty




IP65



A modern design that gives an instant cool white light. Ultra low energy consumption and prolonged lamp life

V1

- Polycarbonate construction • Integral driver • Cable gland included
- Opal diffuser with optional stainless steel frame offering a soft, stylish lighting effect • Double insulated
- Hole cut out size: L: 228mm, D: 75mm, H: 98mm



Code	Wattage	Colour Temp.	Lumens	Avg. Rated Life (Hrs)	IP Rating	MOM / OPQ
BRICKLED	5.4W	6000K	280 lm	20,000 hrs	IP65	1 / 6

## LED CORNER FIXTURE RANGE



5

Year Warranty



IP65



120° PIR




Flexible and decorative range of fittings ideally suited for outdoor applications requiring corner lights

V1

- Complete solution for flat wall or corner mounting: bracket included for optional corner mounting
- Double insulated

### PIR VERSION:

- Factory preset 120° PIR • 10 lux - 7 minutes duration
- No override facility

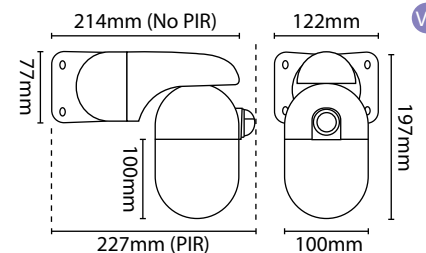

Code	Colour	Version	Wattage	Colour Temp.	Lumens	Avg. Rated Life (Hrs)	IP Rating	MOM / OPQ
WELLWHSTD	White	Standard	10W	4000K	660 lm	25,000 hrs	IP65	1 / 6
WELLBKSTD	Black							
WELLWHPIR	White	120° PIR						
WELLBKPIR	Black							

# CEILING/WALL/BULKHEADS


## LED CORNER FIXTURE RANGE



5  
Year Warranty



- This luminaire is supplied with a 9W LED ES (E27) 'A' Shape lamp – maximum 23W
- Bracket included for optional corner mounting: complete solution for flat wall or corner mounting
- Aluminium alloy construction in white or black finish with white polycarbonate diffuser
- Low energy consumption and prolonged lamp life • BESA box mounting
- Lamp included - 1 year warranty • Earthed



V3


Code	Colour	Wattage	Colour Temp.	Lumens	Avg. Rated Life (Hrs)	IP Rating	MOM / OPQ
WGLED BK	Black	8.9W	2700K	810 lm	15,000 hrs	IP65	1 / 4
WGLED WH	White						
WELLDIFF	White Replacement Polycarbonate Diffuser						1 / 1

## EXTERNAL STAINLESS STEEL WALL LIGHTS

1  
Year Warranty



- Requires: 1 x 35W Max. 240V GU10 halogen or LED lamp per lampholder (not included)
- Stainless steel construction
- Modern attractive design
- Easy lamp change
- Fully adjustable head (SSWLDIR only)
- Earthed

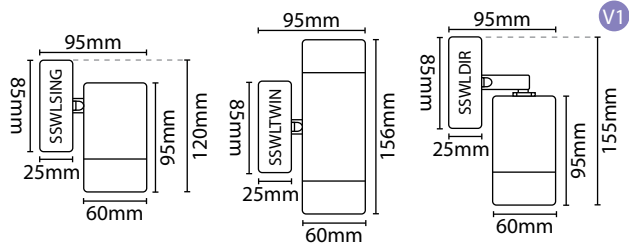

V1


Code	Version	Wattage	IP Rating	MOM / OPQ
SSWLSING	Single Up Or Down Lighting	35W Max	IP44	1 / 12
SSWLTWIN	Twin Up & Down Lighting			
SSWLDIR	Single Directional Lighting			

## CERAMIC UPLIGHTER

1  
Year Warranty



- Requires 1 x suitable BC energy saving lamp (not included). Fitting is rated at 100W max
- Plaster body • Plain ceramic finish: can be painted to match décor
- Pre-wired 300mm mains lead: easy installation • Earthed



V1

Code	Wattage	IP Rating	MOM / OPQ
CW3021	100W Max	IP20	1 / 8

## EXTERNAL AMENITY WALL LIGHTS



# Heki IP65 WALL LIGHTS COMING SOON!



# CEILING/WALL/BULKHEADS



ALULANTPIR



VECOFPIRBK



VECOHPIRBK

## LED ALUMINIUM LANTERNS



5 Year Warranty



110° PIR




An aesthetically pleasing outdoor fitting with superior construction for domestic and commercial applications

- Die-cast aluminium construction • Polycarbonate diffuser
- Earthed

### PIR VERSION:

- 7 metre detection range • 110° detection angle
- Time on adjustment 8 sec - 8 min • Lux level adjustment 5 lux - 2000 lux



V1

Code	Version	Wattage	Colour Temp.	Lumens	Avg. Rated Life (Hrs)	IP Rating	MOM / OPQ
ALULANT	Standard	8W	4000K	570 lm	30,000 hrs	IP44	1 / 6
ALULANTPIR	110° PIR						

## LED ECONOMY FULL LANTERNS



5 Year Warranty



120° PIR




Energy efficient LED alternative to traditional lanterns

- Tough polycarbonate construction
- Double insulated

### PIR VERSION:

- Time on adjustment 5 secs - 5 mins • Lux level adjustments
- 120° detection angle • 8 metre detection range



V1

Code	Version	Wattage	Colour Temp.	Lumens	Avg. Rated Life (Hrs)	IP Rating	MOM / OPQ
VECOFBK	Standard	7W	3100K	420 lm	35,000 hrs	IP44	1 / 4
VECOFPIRBK	120° PIR						

## LED ECONOMY HALF LANTERNS



5 Year Warranty



120° PIR




Energy efficient LED alternative to traditional lanterns

- Tough polycarbonate construction
- Double insulated

### PIR VERSION:

- Time on adjustment 5 secs - 5 mins • Lux level adjustments
- 120° detection angle • 8 metre detection range



V2

Code	Version	Wattage	Colour Temp.	Lumens	Avg. Rated Life (Hrs)	IP Rating	MOM / OPQ
VECOHBK	Standard	7W	3000K	510 lm	50,000 hrs	IP44	1 / 10
VECOHPIRBK	120° PIR						



## POLYCARBONATE HALF LANTERNS

**1**  
Year Warranty


IP44  
120° PIR



- Requires 1 x suitable ES lamp (not included). Fitting is rated at 60W max
- Polycarbonate construction: corrosion resistant
- One piece lens: quick and easy assembly • Double insulated

### PIR VERSIONS:

- 12 metre max detection range • Time on 3 minutes ± 20 sec
- 120° detection zone • Factory preset PIR - no override facility



Code	Colour	Version	Wattage	IP Rating	MOM / OPQ
HL60B	Black	Standard	60W Max	IP44	1 / 12
HL60WH	White				
PIRHL60BK	Black	120° PIR			
PIRHL60WH	White				

## POLYCARBONATE FULL LANTERNS

**1**  
Year Warranty


IP44  
120° PIR



- Requires 1 x suitable ES lamp (not included). Fitting is rated at 60W max
- Gasketed mounting / wiring box • Hexagonal one piece lens: easy assembly
- Polycarbonate construction: corrosion resistant • Double insulated

### PIR VERSION:

- 10 metre range with sensitivity adjustment control
- Time on adjustable (10±5) secs - (4±1) min • 110° detection zone
- Factory preset PIR - no override facility




Code	Version	Wattage	IP Rating	MOM / OPQ
L60B	Standard	60W Max	IP44	1 / 12
PIRL60BK	110° PIR			1 / 6

## OFFICE BUILDING LIGHTING GUIDE

all guides can be downloaded from our website: [www.eterna-lighting.co.uk/guides/](http://www.eterna-lighting.co.uk/guides/)


Eterna can supply all lighting products for all typical commercial and office buildings

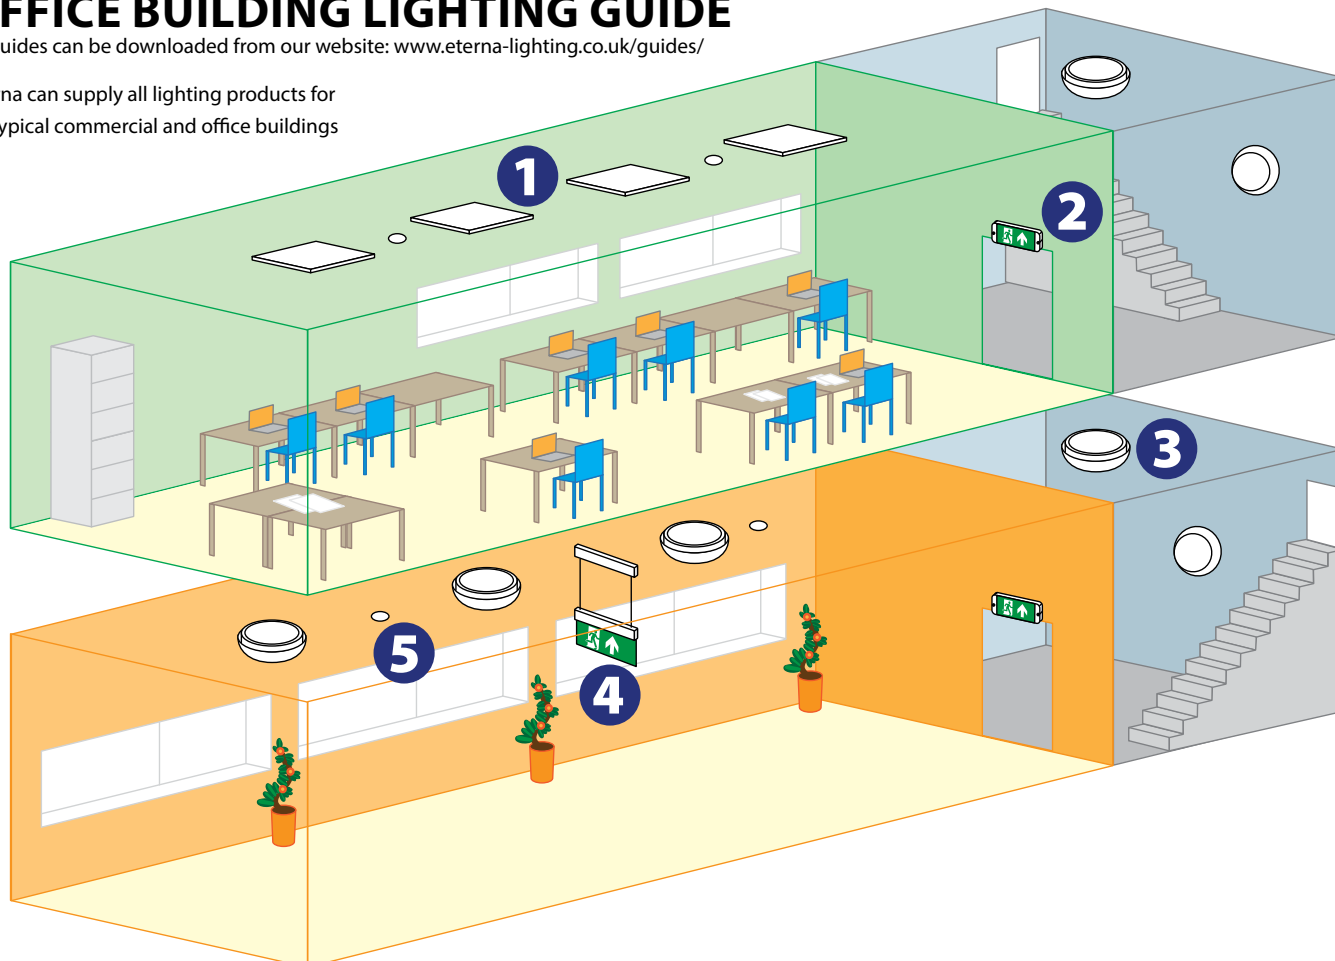

# PANELS

## FREE LIGHTING DESIGN SERVICE

To apply, simply complete the online form on our website:  
[www.eterna-lighting.co.uk/lighting-design-schemes/](http://www.eterna-lighting.co.uk/lighting-design-schemes/)

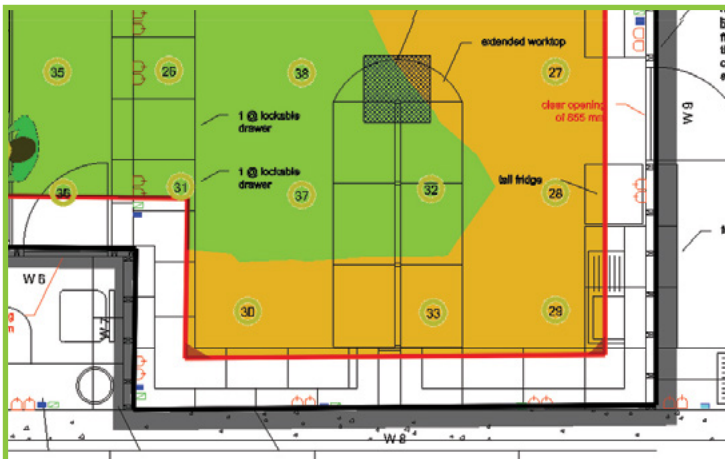


For more complex projects we are able to produce Lighting Design schemes to meet specific commercial needs, using **Relux** and **DIALux** design software.

**THIS IS A FREE SERVICE DESIGNED TO HELP YOU WIN BUSINESS**



Emergency  
Compatible

ALL ETERNA LED  
PANELS CAN BE  
CONVERTED INTO  
**EMERGENCY  
LUMINAIRES**

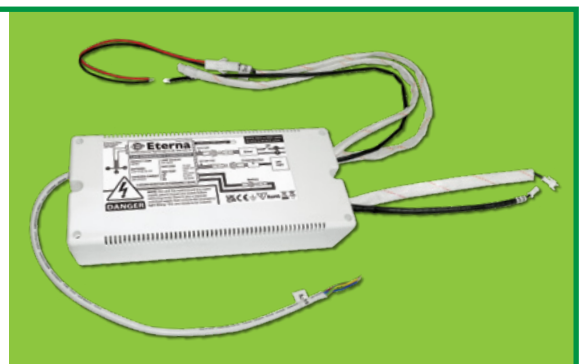

# PANELS

## TP(B) LED PANELS



5  
Year Warranty





Emergency  
Compatible



These light panels are designed to fit into the space normally occupied by standard 600mm x 600mm ceiling tiles, and are therefore a direct replacement for traditional modular fluorescent fittings used in many offices, educational and commercial applications

V1

- Aluminium frame • Supplied with Lifud branded driver
- Low glare and even shadow free light distribution ensures suitability for a variety of applications: visually superior to standard fluorescent panels
- 4000K colour temperature, edge lit: offering a bright neutral white lighting effect
- 5000K colour temperature, edge lit: offering a cool white lighting effect
- Ultra slim profile and a white trim finish to match the majority of T. bar ceilings
- CRI Ra:≥80: High CRI to minimise colour distortion of illuminated products
- Surface mounting can be achieved by using screwless kit: SURFACEMK
- Can be recessed in the ceiling or suspended from wires: see PANSUSKIT suspension kit
- Ability to be converted into an emergency luminaire: see below for emergency battery packs
- Double insulated • IES files available



### TP(b) Meaning

Specifiable ceiling panel with dimming options offering efficient output and TP(b) compliance and assurance from a Lifud branded driver

Code	Wattage	Colour Temp.	Lumens	Avg. Rated Life (Hrs)	IP Rating	MOM / OPQ
600x600						
600P4K	36W	4000K	3600 lm	30,000 hrs	IP20	1 / 5
600P5K		5000K				
1200x600						
1200P4K	60W	4000K	4800 lm	35,000 hrs	IP20	1 / 3
Accessories (2 x suspension packs needed for 1200x600 panel)						
PANSUSKIT	2m Cable Length Suspension Pack					1 / 100
SURFACEMK	Surface Mounting Kit (supplied in kit form)					1 / 20
EBPM3	10-60V 100W Max Battery Pack					1 / 1
SEEBPM3	Self Test 10-60V 100W Max Battery Pack					1 / 1
EBPM3LI	18-60Vdc 150W Max Li-Ion Battery Pack					1 / 40


## 600X600 LOW GLARE UGR≤19 LOUVERED PANEL



5  
Year Warranty




Emergency  
Compatible

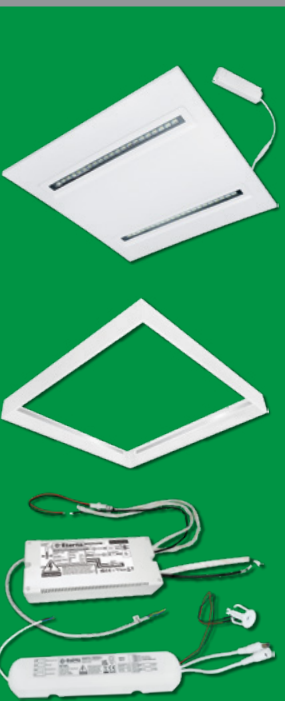

This stylish indirect LED panel is primarily intended for areas where low glare compliance is required, but also suits any installation where high quality installation appearance & superior lighting performance is desired. Specifically engineered to achieve UGR≤19 and offering even light distribution with the minimum number of luminaires per installation

V1

- Eliminates the need for TP(a) or TP(b) compliance due to steel construction
- Includes a plug and play constant current non-dimmable LED driver
- High CRI (≥80): to minimise colour distortion of illuminated area & objects
- 4000K colour temperature offering a bright neutral white lighting effect
- White finish matching the majority of exposed T bar ceilings
- Push fit wiring terminal direct into the LED driver, terminal capacity up to 1.5mm<sup>2</sup>
- Surface mounting can be achieved by using screwless kit: SURFACEMK
- Ability to be converted into an emergency luminaire: see below for emergency battery packs
- Double insulated • IES files available



Code	Wattage	Colour Temp.	Lumens	Avg. Rated Life (Hrs)	IP Rating	MOM / OPQ
600P4KTPU	30W	4000K	3150 lm	40,000 hrs	IP20	1 / 5
Accessories						
SURFACEMK	Surface Mounting Kit (supplied in kit form)					1 / 20
EBPM3	10-60V 100W Max Battery Pack					1 / 1
SEEBPM3	Self Test 10-60V 100W Max Battery Pack					1 / 1
EBPM3LI	18-60Vdc 150W Max Li-Ion Battery Pack					1 / 40


## 600X600 BACKLIT LED PANEL



**5**  
Year Warranty




Emergency  
Compatible

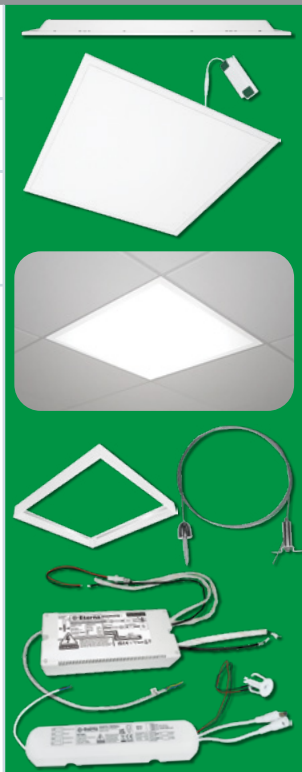

This commercial backlit LED panel produces a uniform light output with easy loop-in, loop-out push fit connectors whilst maintaining an ultra thin 35mm depth

V1

- Steel back panel, aluminium frame and polystyrene diffuser construction • IES files available
- Ra: ≥80, high CRI to minimise colour distortion of illuminated products in retail applications
- Zero maintenance, integral light source providing instant light output
- Operating temperature: 5 to 45°C • Lumen efficacy: 111 lm/W
- Includes a plug and play constant current non-dimmable LED driver
- Back lit: offering a bright neutral white lighting effect
- White trim finish to match the majority of T. bar ceilings
- Push fit wiring terminal direct into the LED driver • Double insulated
- Surface mounting can be achieved by using screwless kit: SURFACEMK
- Can be recessed in the ceiling or suspended from wires: see PANSUSKIT suspension kit
- Ability to be converted into an emergency luminaire: see below for emergency battery packs



Code	Wattage	Colour Temp.	Lumens	Avg. Rated Life (Hrs)	IP Rating	MOM / OPQ
KBLPAN	36W	4200K	4000 lm	40,000 hrs	IP20	1 / 6
Accessories						
PANSUSKIT	2m Cable Length Suspension Pack					1 / 100
SURFACEMK	Surface Mounting Kit (supplied in kit form)					1 / 20
EBPM3	10-60V 100W Max Battery Pack					1 / 1
SEEBPM3	Self Test 10-60V 100W Max Battery Pack					1 / 1
EBPM3LI	18-60Vdc 150W Max Li-Ion Battery Pack					1 / 40


## 600X600 BACKLIT LED PANEL



**5**  
Year Warranty




Emergency  
Compatible

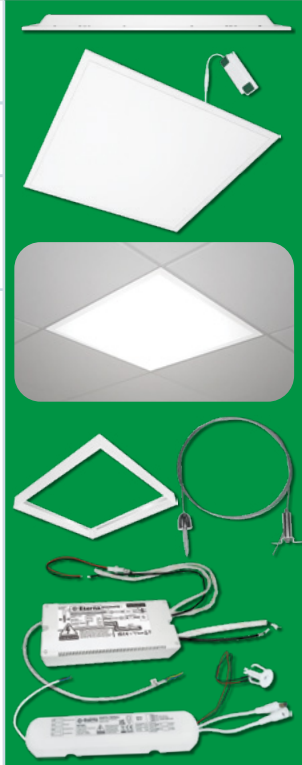

This commercial backlit LED panel produces a uniform light output with easy loop-in, loop-out push fit connectors whilst maintaining an ultra thin 35mm depth

V1


- Steel back panel, aluminium frame and polystyrene diffuser construction • IES files available
- Ra: ≥80, high CRI to minimise colour distortion of illuminated products in retail applications
- Zero maintenance, integral light source providing instant light output
- Operating temperature: 5 to 45°C • Lumen efficacy: 96 lm/W
- Includes a plug and play constant current non-dimmable LED driver
- Back lit: offering a bright neutral white lighting effect
- White trim finish to match the majority of T. bar ceilings
- Push fit wiring terminal direct into the LED driver • Double insulated
- Surface mounting can be achieved by using screwless kit: SURFACEMK
- Can be recessed in the ceiling or suspended from wires: see PANSUSKIT suspension kit
- Ability to be converted into an emergency luminaire: see below for emergency battery packs



Code	Wattage	Colour Temp.	Lumens	Avg. Rated Life (Hrs)	IP Rating	MOM / OPQ
VEGOPANBL	36W	4000K	3450 lm	30,000 hrs	IP20	1 / 6
Accessories						
PANSUSKIT	2m Cable Length Suspension Pack					1 / 100
SURFACEMK	Surface Mounting Kit (supplied in kit form)					1 / 20
EBPM3	10-60V 100W Max Battery Pack					1 / 1
SEEBPM3	Self Test 10-60V 100W Max Battery Pack					1 / 1
EBPM3LI	18-60Vdc 150W Max Li-Ion Battery Pack					1 / 40



### SURFACEMK NEW SCREWLESS SURFACE MOUNT KIT



Mount Kit  
Panels  
easily click  
together

Suitable for  
40mm depth  
backlit  
panels




SURFACEMK with  
Eterna 600x600 panel

# BATTENS INTERIOR

## INTERIOR BATTEN LIGHTING GUIDE


all guides can be downloaded from our website: [www.eterna-lighting.co.uk/guides/](http://www.eterna-lighting.co.uk/guides/)

LED interior battens are the energy saving alternatives to traditional fluorescent versions.

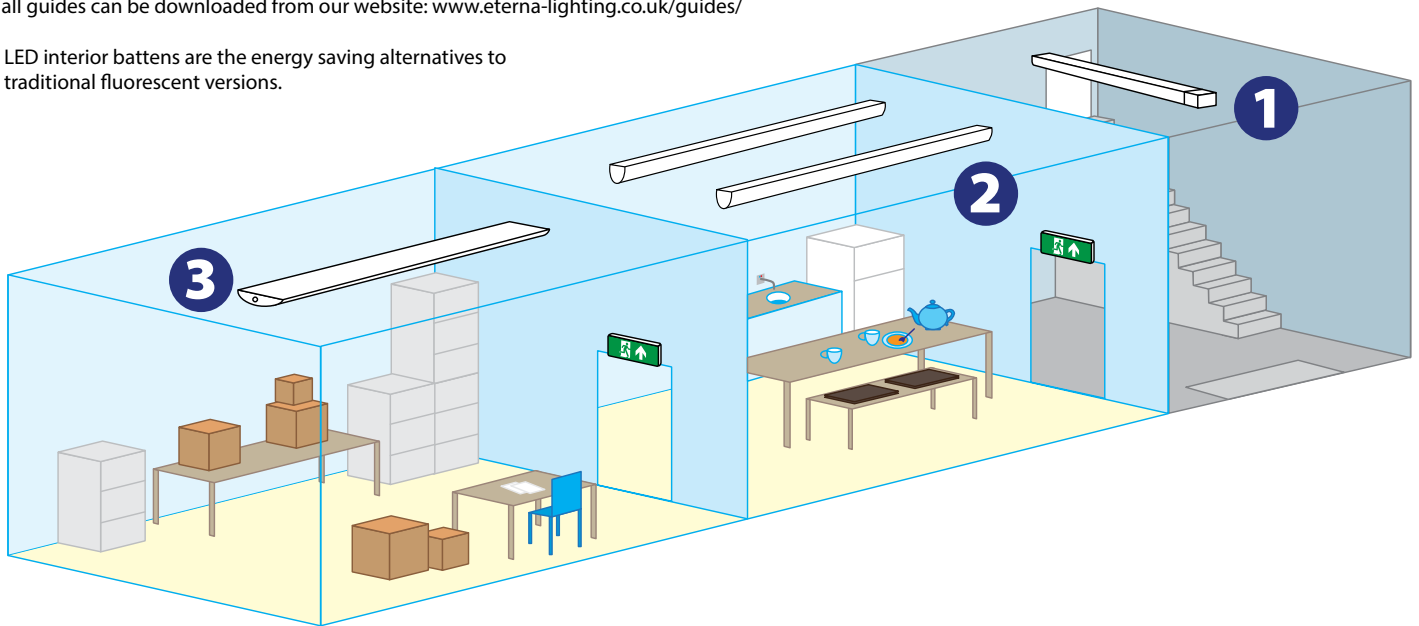



### Interior LED Batten Benefits

- ✓ Energy saving LEDs
- ✓ Bright illumination
- ✓ Long life-span
- ✓ Minimal maintenance
- ✓ Versatile for many installations
- ✓ Flicker free (excluding T8LED)
- ✓ Instant light output
- ✓ Popular in car parks, garages & toilet blocks
- ✓ Often used in bus & train stations
- ✓ Also ideal for storage rooms, hallways, corridors and canteen areas

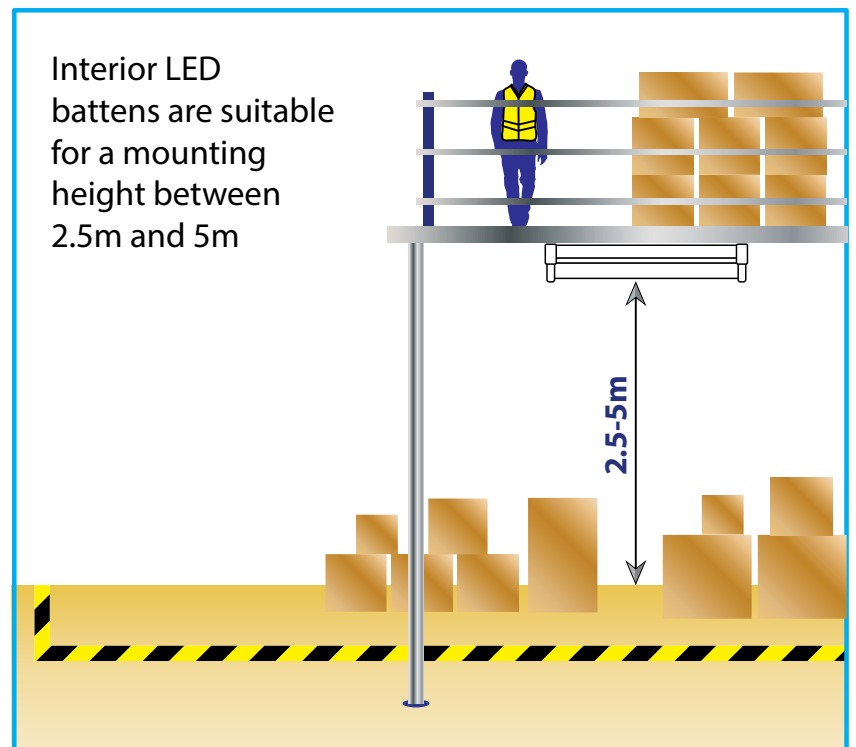



# BATTENS - INTERIOR

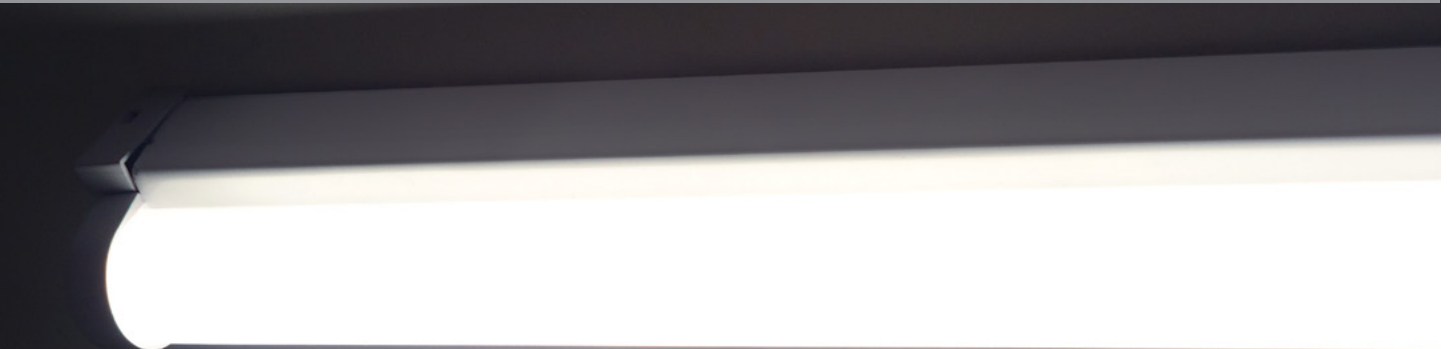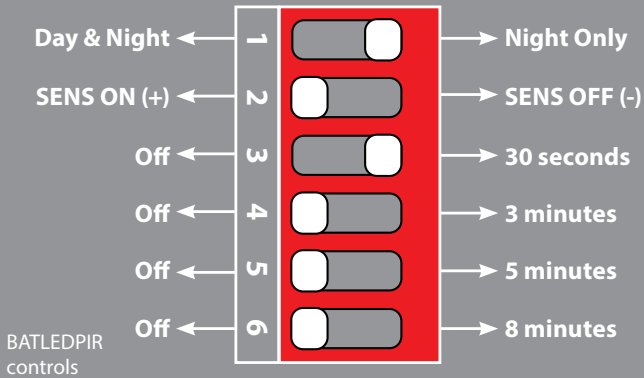

BATLED range

## LED STANDARD & HIGH OUTPUT BATTENS & LI-ION EMERGENCY VERSIONS



5 Year Warranty



Emergency Product



Li-Ion Battery




100° PIR



Full photometric data available to enable lighting designs. Light output is equivalent or superior to traditional fluorescent battens


V1

- Pressed steel body and polycarbonate diffuser
- LED tray can be removed from the housing for easy installation
- 20mm knockout glands at each end for through wiring options
- BESA box mounting • Gear tray retaining straps
- Push terminal connections • Earthed • IES files available

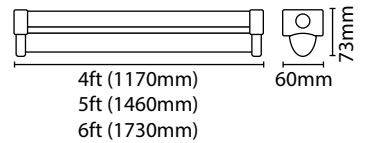


### EMERGENCY VERSIONS:

- LiFePO4 Lithium battery technology offering reduced energy consumption, enhanced charging cycle capacity & improved operational life compared to standard NiCad products
- Built-in battery overcharge protection • 3 hour non maintained operation
- Integrated green charging indicator LED • 160 lm in emergency mode
- Battery - Li-Ion 3.2V 1500mAh • Battery 5 year warranty - Replacement battery code: EB19




### BATLEDPIR:

- Robust polycarbonate construction
- Time-on adjustable: 30 secs, 3 mins, 5 mins, 8 mins
- Night & day or night only options selectable
- Detection range 3-6 metres • 100° detection area
- Double insulated



Code	Version	Wattage	Colour Temp.	Lumens	Avg. Rated Life (Hrs)	IP Rating	MOM / OPQ				
BATLED4FT	4ft Standard	23W	4200K	2950 lm	35,000 hrs	IP20	1 / 6				
BATLED5FT	5ft Standard	38W		4750 lm							
BATLED6FT	6ft Standard	48W		6050 lm							
BATLED5HO	5ft High Output	60W		7550 lm							
BATLED6HO	6ft High Output	65W		8450 lm							
BATL4FTEM3	4ft EM3	23W		2950 lm							
BATL5FTEM3	5ft EM3	38W		4750 lm							
BATL6FTEM3	6ft EM3	48W		6050 lm							
BATL5HOEM3	5ft High Output EM3	60W		7550 lm							
BATL6HOEM3	6ft High Output EM3	65W		8450 lm							
BATLEDPIR	Add-on PIR Sensor										

# BATTENS - INTERIOR

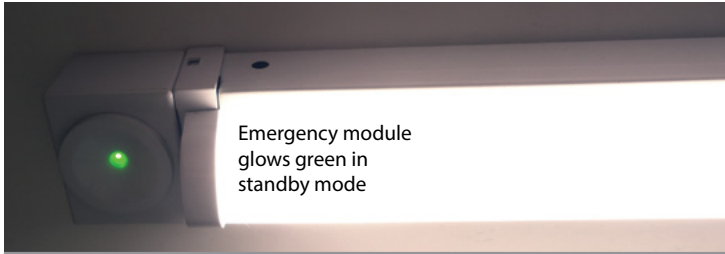

Emergency module glows green in standby mode



Bright white glow in emergency mode

## SELF-TEST LED STANDARD & HIGH OUTPUT BATTENS



5 Year Warranty





Emergency Product



Full photometric data available to enable lighting designs. Light output is equivalent or superior to traditional fluorescent battens

- Pressed steel body and polycarbonate diffuser
- LED tray can be removed from the housing for easy installation
- 20mm knockout glands at each end for through wiring options
- BESA box mounting • Gear tray retaining straps
- Push terminal connections • >120 lm/W
- Automatic testing in accordance with BS EN 62034
- Pre-wired for easy installation • Earthed
- LED glows green in standby mode and super bright white light in the event of a mains failure
- Minimum 3 hour functionality in emergency mode • 118 lumens in emergency mode
- Battery - Ni-Cd 3.6V 2000mAh • Battery 1 year warranty - Replacement battery code: EB2

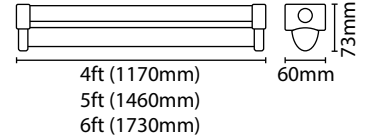

Code	Version	Wattage	Colour Temp.	Lumens	Avg. Rated Life (Hrs)	IP Rating	MOM / OPQ
SELB4FTEM3	4ft EM3	23W	4200K	2930 lm	35,000 hrs	IP20	1 / 6
SELB6FTEM3	6ft EM3	48W		6000 lm			
SELB5HOEM3	5ft High Output EM3	65W		7900 lm			
SELB6HOEM3	6ft High Output EM3	70W		8600 lm			


## STANDARD & HIGH OUTPUT LED BATTENS



5 Year Warranty



- Pressed steel body and polycarbonate diffuser
- LED tray can be removed from the housing for easy installation
- 20mm knockout glands at each end for through wiring options
- BESA box mounting
- Gear tray retaining straps
- Up to 106 lm/W • Earthed • IES files available

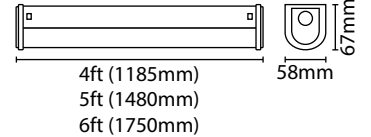

Code	Version	Wattage	Colour Temp.	Lumens	Avg. Rated Life (Hrs)	IP Rating	MOM / OPQ
VECOBAT4FT	4ft Standard	18W	4000K	1800 lm	30,000 hrs	IP20	1 / 6
VECOBAT5FT	5ft Standard	24W		2400 lm			
VECOBAT6FT	6ft Standard	32W		3400 lm			
VECOBAT5HO	5ft High Output	48W		4000 lm			
VECOBAT6HO	6ft High Output	64W		5200 lm			


## STANDARD LED BATTENS



5 Year Warranty



- Pressed steel body and polycarbonate diffuser
- LED tray can be removed from the housing for easy installation
- 20mm knockout glands at each end for through wiring options
- BESA box mounting
- Gear tray retaining straps
- Up to 106 lm/W • Earthed • IES files available

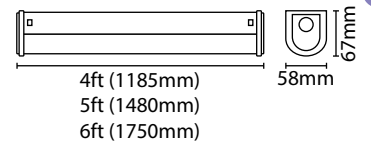

Code	Length	Wattage	Colour Temp.	Lumens	Avg. Rated Life (Hrs)	IP Rating	MOM / OPQ
KBAT4	4ft	18W	4000K	1800 lm	30,000 hrs	IP20	1 / 6
KBAT5	5ft	24W		2400 lm			
KBAT6	6ft	32W		3400 lm			

# BATTENS - INTERIOR



ELESUSPACK



Emergency module glows green in standby mode



Bright white glow in emergency mode

## 5FT LED TWIN SLIMLINE CEILING FITTINGS



5 Year Warranty



Emergency Product



A slim, modern design LED ceiling fitting which offers a more stylish alternative to traditional battens. Where a more aesthetically pleasing fixture is desirable this versatile and elegant light source is suitable for commercial, retail and domestic applications

V1

- Polycarbonate and aluminium construction • 100 lm/W • Earthed
- IES files available (not EM3) • Push terminal connections



### EMERGENCY VERSION (WITH LDLEM3):

- LED glows green in standby mode and super bright white light in the event of a mains failure
- Minimum 3 hour functionality in emergency mode • 118 lumens in emergency mode
- Battery - Ni-Cd 3.6V 2000mAh • Battery 1 year warranty - Replacement battery code: EB2

Code	Version	Wattage	Colour Temp.	Lumens	Avg. Rated Life (Hrs)	IP Rating	MOM / OPQ
ELEGANCE5	Standard	50W	4000K	5000 lm	40,000 hrs	IP20	1 / 6
ELEGAN5EM3	Emergency						
ELESUSPACK	Suspension Pack - Cable Length: 1m						1 / 100

## IP65 LED NANO UTILITY BATTENS




5 Year Warranty



IP65



- Tough polycarbonate construction
- Push fit terminal connections for quick installation
- Cable gland included
- Double insulated • IES files available



V1

Code	Length	Wattage	Colour Temp.	Lumens	Avg. Rated Life (Hrs)	IP Rating	MOM / OPQ
KNANOIP2FT	2ft	15W	4000K	1800 lm	40,000 hrs	IP65	1 / 20
KNANOIP4FT	4ft	20W		2550 lm			
KNANOIP5FT	5ft	25W		2870 lm			


## T8 SLIMLINE LED BATTEN



5 Year Warranty



- Polycarbonate and aluminium construction • Up to 87.5 lm/W
- Low energy alternative to a standard fluorescent batten
- Ultra-bright LEDs: low power consumption with enhanced life expectancy
- Slim design: offers a more stylish and modern solution to traditional battens
- Snap in fixing clips: easy installation
- Double insulated



V1


Code	Length	Wattage	Colour Temp.	Lumens	Avg. Rated Life (Hrs)	IP Rating	MOM / OPQ
T8LED20	1200mm / 4ft	20W	4000K	1600 lm	20,000 hrs	IP20	1 / 20



# BATTENS WEATHERPROOF

## CARPARK LIGHTING GUIDE

all guides can be downloaded from our website:  
[www.eterna-lighting.co.uk/guides/](http://www.eterna-lighting.co.uk/guides/)

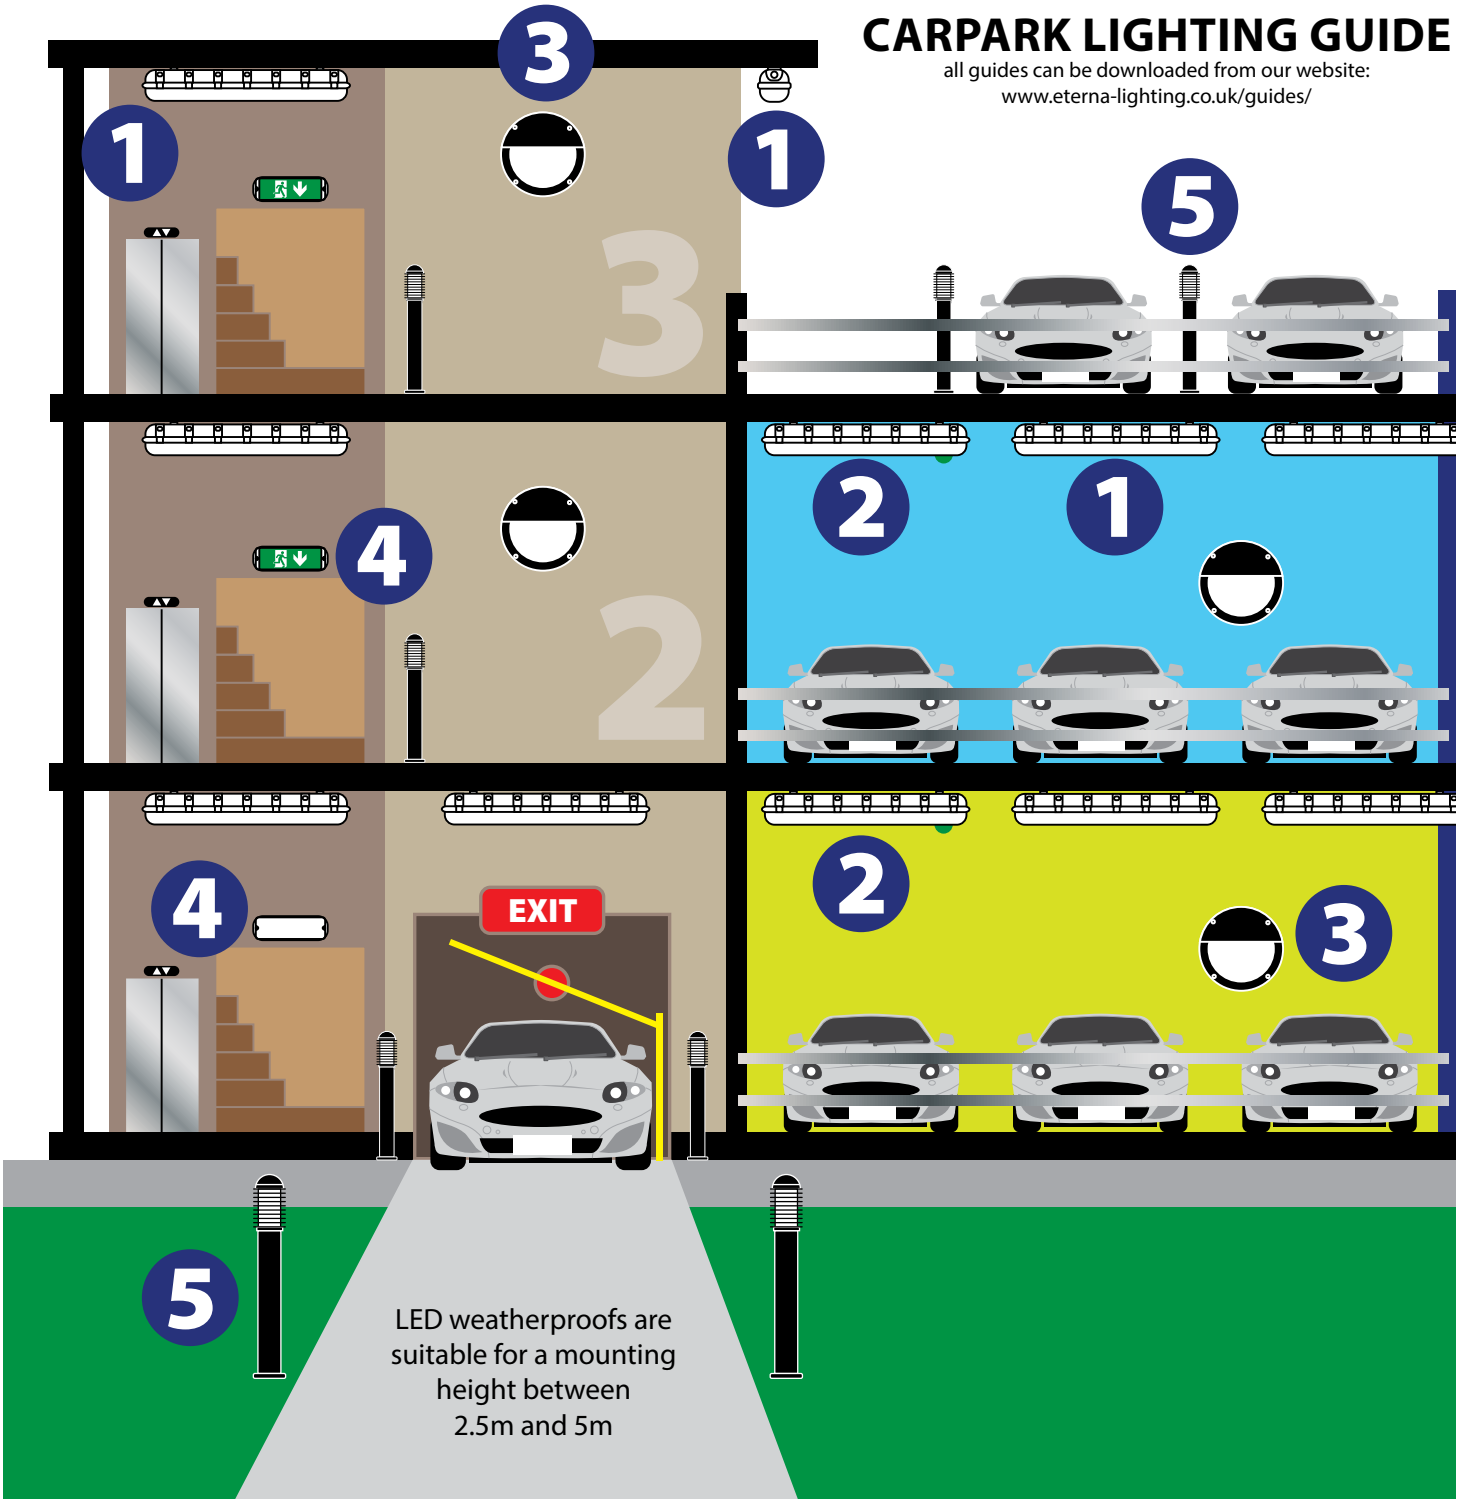

# BATTENS - WEATHERPROOF

## LED WEATHERPROOF IP65 BATTENS & LI-ION EMERGENCY VERSIONS



5  
Year Warranty



Emergency  
Product



Li-Ion Battery



IP65



IK10



Microwave  
Sensor




This range is quick and easy to install due to "loop in & out" push fit connectors and features an IK10 "anti-drop" diffuser

V1

- Multiple cable entries, allowing for "loop in & out" wiring via push fit terminal block
- Earthed
- "Anti-drop" polycarbonate diffuser & gear tray for ease of installation
- Producing up to 106 lm/W
- Three mounting options - BESA box, directly onto ceiling surfaces or stainless steel suspension clips (incl)
- Standard fitting operating temperature: -20 to 45°C
- Emergency fitting operating temperature: 0 to 45°C
- Supplied with a 20mm IP65 gland & fixings kit
- IK10 rated fitting maximises durability and strength
- LED performance allows for "like for like" replacement of existing fluorescent luminaires
- IES files available

### EMERGENCY VERSIONS:

- Emergency 3 hour duration maintained operation with the facility for remote switching
- Battery - Li-Ion 6.4V 1500mAh
- Battery 5 year warranty - Replacement battery code: EB20



### MICROWAVE SENSOR VERSIONS:

- Integral adjustable microwave sensor, options to adjust daylight sensor 2-50 lux or disable, detection sensitivity 10-100% (range up to 10m, angle 30-150°). Hold on time 5 seconds to 15 minutes

Code	Version	Wattage	Colour Temp.	Lumens	Avg. Rated Life (Hrs)	IP / IK Rating	MOM / OPQ
<b>Standard</b>							
WP42	4ft Twin	38W	4000K	3880 lm	40,000 hrs	IP65 IK10	1 / 1
WP52	5ft Twin	58W		6020 lm			
WP61	6ft Single	35W		3680 lm			
WP62	6ft Twin	68W		6980 lm			
<b>Emergency</b>							
WP52EM3	5ft Twin	58W	4000K	6020 lm	40,000 hrs	IP65 IK10	1 / 1
WP61EM3	6ft Single	35W		3680 lm			
<b>MW Sensor</b>							
WP42MW	4ft Twin	38W	4000K	3880 lm	40,000 hrs	IP65 IK10	1 / 1
WP51MW	5ft Single	30W		3180 lm			
WP61MW	6ft Single	35W		3680 lm			
WP62MW	6ft Twin	68W		6980 lm			



## 5FT LED ECONOMY WEATHERPROOF



5  
Year Warranty



IP65



- Polycarbonate construction
- Pre-wired with 1.5m cable
- Double insulated
- IES files available



V1

Code	Wattage	Colour Temp.	Lumens	Avg. Rated Life (Hrs)	IP Rating	MOM / OPQ
VECOWP5FT	45W	4000K	4400 lm	30,000 hrs	IP65	1 / 20

# BATTENS - WEATHERPROOF

## LED WEATHERPROOF IP65 BATTENS & LI-ION EMERGENCY VERSIONS



5  
Year Warranty



Li-Ion Battery



IK10




This range is quick and easy to install due to "loop in & out" push fit connectors and features an IK10 "anti-drop" diffuser

V1

- Multiple cable entries, allowing for "loop in & out" wiring via push fit terminal block • Earthed
- "Anti-drop" polycarbonate diffuser & gear tray for ease of installation • IES files available
- Three mounting options - BESA box, directly onto ceiling surfaces or stainless steel suspension clips (incl)
- Stainless steel diffuser clips supplied as standard, suitable for food industry applications
- Standard fitting operating temperature: -20 to 45°C • Emergency fitting operating temperature: 0 to 45°C
- Supplied with a 20mm IP65 gland & fixings kit • IK10 rated fitting maximises durability and strength
- LED performance allows for "like for like" replacement of existing fluorescent luminaires
- Producing up to 106 lm/W • IES files available for lighting designs

### EMERGENCY VERSIONS:

- Emergency 3 hour duration maintained operation with the facility for remote switching
- Battery - Li-Ion 6.4V 1500mAh
- Battery 5 year warranty - Replacement battery code: EB20



Code	Version	Wattage	Colour Temp.	Lumens	Avg. Rated Life (Hrs)	IP / IK Rating	MOM / OPQ
<b>Standard</b>							
KWPSIN5	5ft Single	30W	4000K	3180 lm	40,000 hrs	IP65 IK10	1 / 6
KWPTWI5	5ft Twin	58W		6020 lm			
KWPSIN6	6ft Single	35W		3680 lm			
KWPTWI6	6ft Twin	68W		6980 lm			
<b>Emergency</b>							
KWPEM3SIN5	5ft Single	30W	4000K	3180 lm	40,000 hrs	IP65 IK10	1 / 1
KWPEM3TWI5	5ft Twin	58W		6020 lm			
KWPEM3SIN6	6ft Single	35W		3680 lm			
KWPEM3TWI6	6ft Twin	68W		6980 lm			


## IP65 LED ECONOMY WEATHERPROOFS



5  
Year Warranty



- Polycarbonate diffuser • ABS housing
- Multiple fixing options - supplied with surface mounting brackets and suspension hooks
- Push fit terminal connections
- Temporary suspension option for easy installation
- Cable entries on end and back of fitting
- Earthed • IES files available



V2

Code	Version	Wattage	Colour Temp.	Lumens	Avg. Rated Life (Hrs)	IP Rating	MOM / OPQ
VECO5WPSI2	5ft Single	30W	4000K	2900 lm	40,000 hrs	IP65	1 / 6
VECO5WPTW2	5ft Twin	45W		4300 lm			
VECO6WPSI2	6ft Single	48W		4500 lm			
VECO6WPTW2	6ft Twin	65W		6200 lm			


## IP65 LED NANO UTILITY BATTENS



5  
Year Warranty



- Tough polycarbonate construction
- Push fit terminal connections for quick installation
- Cable gland included
- Double insulated • IES files available




V1

Code	Length	Wattage	Colour Temp.	Lumens	Avg. Rated Life (Hrs)	IP Rating	MOM / OPQ
KNANOIP2FT	2ft	15W	4000K	1800 lm	40,000 hrs	IP65	1 / 20
KNANOIP4FT	4ft	20W		2550 lm			
KNANOIP5FT	5ft	25W		2870 lm			

# FLOODLIGHTING



FLOOD120W shown  
page 49

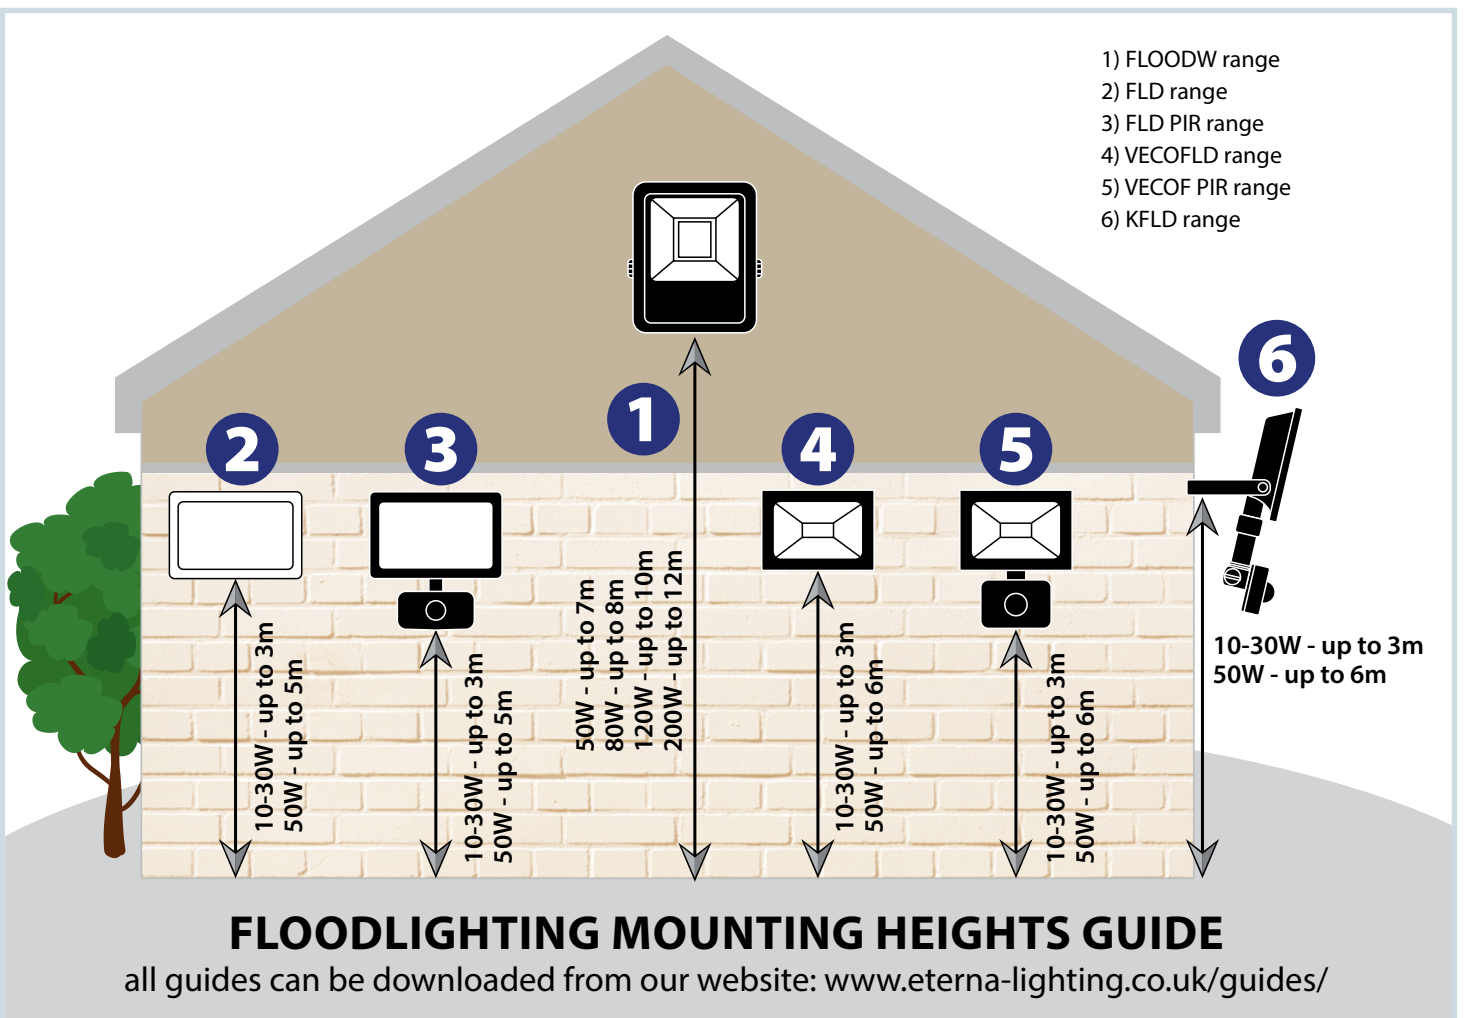

# FLOODLIGHTING

## LED FLOODLIGHTS



5

Year Warranty



IP65 / IP44



120° PIR




- Aluminium & polycarbonate construction • Horizontally and vertically adjustable bracket
- Detachable bracket allowing easy installation
- Fixed IP rated connector for wiring direct to the floodlight
- Terminal connector can be removed for ease of wiring • Earthed • IES files available

V1

### PIR VERSIONS:

- Horizontally and vertically adjustable PIR with 120° detection angle
- Time on adjustment  
10 sec ± 3 sec - 10 mins ± 3 mins
- 10W-30W: detection range 9m
- 50W: adjustable detection range between 4-8m
- Lux level adjustments: 5 Lux ~ 2000 Lux

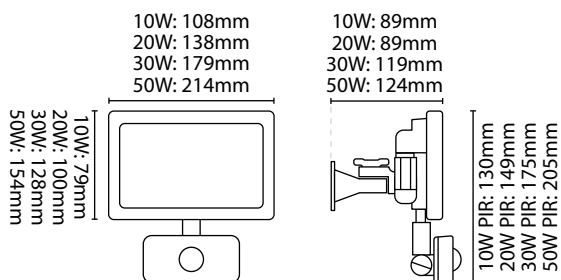

Code	Colour	Wattage	Colour Temp.	Lumens	Avg. Rated Life (Hrs)	IP Rating	MOM / OPQ				
<b>Standard</b>											
FLD10BK	Black	10W	4000K	800 lm	25,000 hrs	IP65	1 / 40				
FLD10WH	White			1600 lm				1 / 20			
FLD20BK	Black	20W		2400 lm			1 / 10				
FLD20WH	White			4000 lm							
FLD30BK	Black	30W		4000K			25,000 hrs	IP44	1 / 10		
FLD30WH	White										
FLD50BK	Black	50W								800 lm	
FLD50WH	White									1600 lm	
<b>120° PIR</b>											
FLD10PIRBK	Black	10W	800 lm		25,000 hrs	IP44				1 / 20	
FLD10PIRWH	White		1600 lm								
FLD20PIRBK	Black	20W	2400 lm	1 / 10							
FLD20PIRWH	White		4000 lm								
FLD30PIRBK	Black	30W	4000K	25,000 hrs	IP44	1 / 10					
FLD30PIRWH	White										
FLD50PIRBK	Black	50W					800 lm				
FLD50PIRWH	White						1600 lm				

## ECONOMY LED FLOODLIGHTS



5

Year Warranty



IP65 / IP44




- Aluminium body with tempered glass diffuser • IES files available
- Pre-wired with 30cm flex • Quick fix bracket • Earthed

V1

### PIR VERSIONS:

- Vertically and horizontally adjustable PIR
- Time on adjustment: 10 sec ± 3 sec - 10 min ± 3 min
- 120° detection angle
- 8 metre detection range
- Lux level adjustments: 10 Lux ~ 2000 Lux

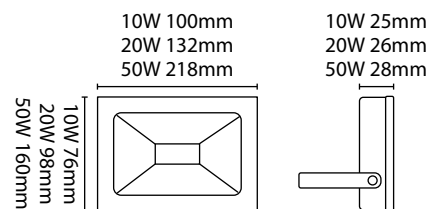


Code	Wattage	Colour Temp.	Lumens	Avg. Rated Life (Hrs)	IP Rating	MOM / OPQ
<b>Standard</b>						
VECOFLD10	10W	4000K	850 lm	25,000 hrs	IP65	1 / 40
VECOFLD50	50W		4250 lm			1 / 20
<b>120° PIR</b>						
VECOF10PIR	10W	4000K	850 lm	25,000 hrs	IP44	1 / 40
VECOF20PIR	20W		1700 lm			1 / 30
VECOF50PIR	50W		4250 lm			1 / 20





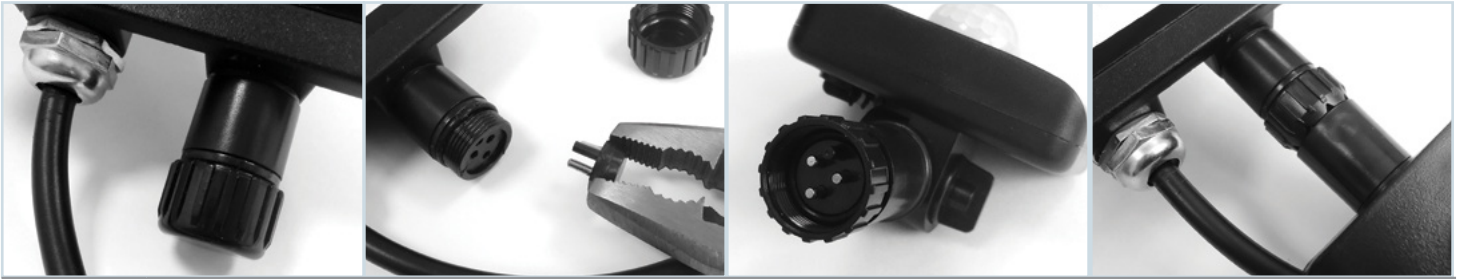

# FLOODLIGHTING

## KFLD RANGE QUICK FIX, PLUG & PLAY PIR ATTACHMENT





### LED FLOODLIGHTS WITH PIR ATTACHMENT OPTION

-  LED
-  5 Year Warranty
-  IP65
-  120° PIR



- Aluminium body with tempered glass diffuser
- Pre-wired with 22cm 3 core flex • Quick fix bracket • Earthed

- KFLDPIR:**
- Vertically and horizontally adjustable PIR
  - Time on adjustment:  
10 sec ± 3 sec - 7 min ± 2 min
  - Lux level adjustments: 5 Lux ~ 2000 Lux
  - 120° detection angle
  - 10 metre detection range

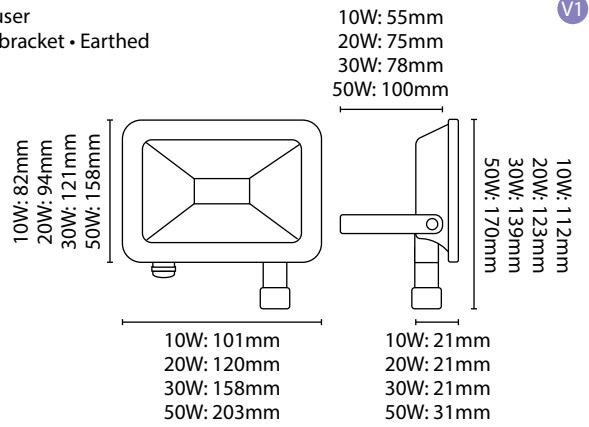


Code	Wattage	Colour Temp.	Lumens	Avg. Rated Life (Hrs)	IP Rating	MOM / OPQ
KFLD10	10W	4000K	900 lm	25,000 hrs	IP65	1 / 60
KFLD20	20W		1800 lm			1 / 40
KFLD30	30W		2800 lm			1 / 30
KFLD50	50W		4500 lm			1 / 20
KFLDPIR	Quick Fix, Plug & Play PIR Attachment					1 / 100

### ECONOMY LED RECHARGEABLE FLOODLIGHTS WITH LI-ION BATTERY

-  LED
-  5 Year Warranty
-  IP44
-  Li-ion Battery



- ABS housing • Safety glass cover
- 10W: 2 x 18650 Li-ion battery - 3.7V, capacity 2200mAh
- 20W: 4 x 18650 Li-ion battery - 7.4V, capacity 4400mAh
- 4 hours illumination (with full charge)
- Charge times from full discharge are as follows:  
6 hours (mains charger) / 6 hours (car charger)
- IP44: enables internal and external use
- Comes complete with mains charger and car charger

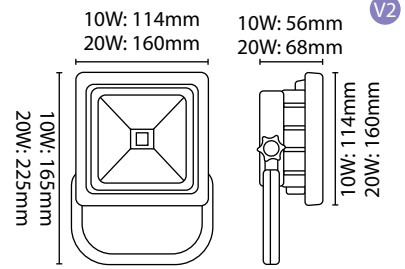

Code	Wattage	Colour Temp.	Lumens	Avg. Rated Life (Hrs)	IP Rating	MOM / OPQ
VECORCFL10	10W	4000K	650 lm	30,000 hrs	IP44	1 / 10
VECORCFL20	20W		1300 lm			1 / 5



## HIGH OUTPUT LED FLOODLIGHTS

V1




**5**  
Year Warranty



Robust high output floodlight range offering performance and durability for industrial and commercial applications

**FLOOD50W / 80W - PERFECT FOR INDUSTRIAL & COMMERCIAL APPLICATIONS**  
**FLOOD120W / 200W - PERFECT WHEN A HIGHER MOUNTING HEIGHT IS REQUIRED**

- High Power LED Chip array: which is better suited to these higher power ratings, where the large physical size of the housing and chip array maximises performance available from this technology
- 4000K colour temperature: bright light without the harsh effect of higher colour temperature products
- Die cast aluminium construction, toughened safety glass lens
- Pre-wired with 80cm of cable
- Over 108 lm/W • Earthed • IES files available

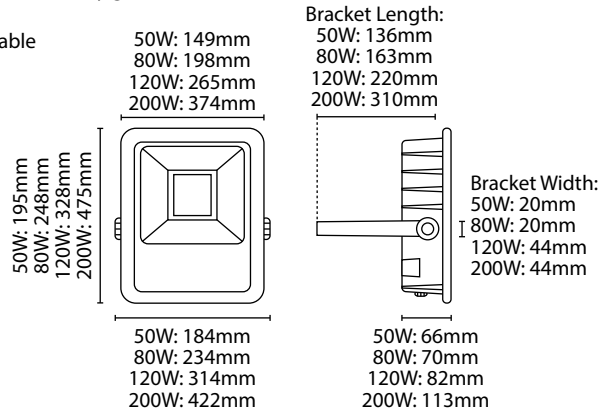

Code	Wattage	Colour Temp.	Lumens	Avg. Rated Life (Hrs)	IP Rating	MOM / OPQ
FLOOD50W	50W	4000K	5400 lm	25,000 hrs	IP65	1 / 6
FLOOD80W	80W		9400 lm			1 / 4
FLOOD120W	120W		14500 lm			1 / 1
FLOOD200W	200W		23000 lm			1 / 1



Illuminance Area diagrams for ALL the FLOODW range floodlights can be found on the website

### FLOOD50W Illuminance Area

EXAMPLE FOR MEDIUM TRAFFIC PARKING AREAS

**>=10 LUX AVERAGE**

General circulation areas at outdoor work places

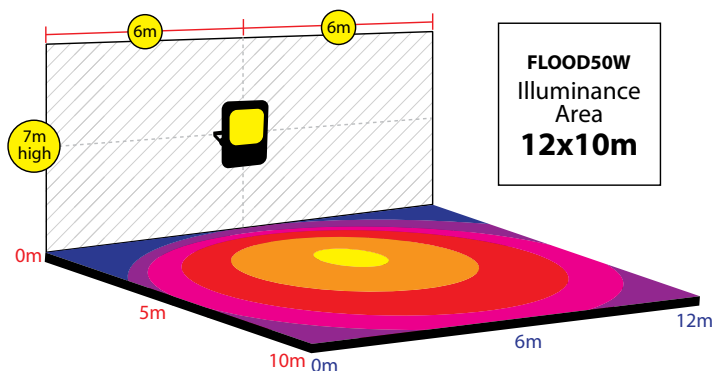



### FLOOD200W Illuminance Area

EXAMPLE FOR MEDIUM TRAFFIC PARKING AREAS

**>=10 LUX AVERAGE**

General circulation areas at outdoor work places

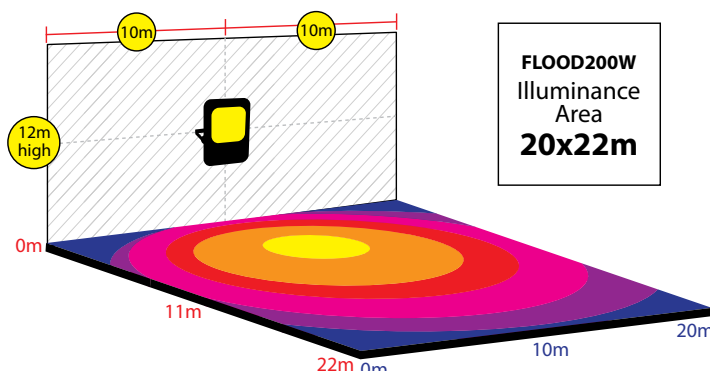

Based On Maintenance Factor 0.8 / Floodlight Angle: 63°

Based On Maintenance Factor 0.8 / Floodlight Angle: 63°

### COMMON FLOODLIGHT IP RATINGS




The access probe of 1.0mm diameter shall not penetrate. Protected against water splashed from all directions. Limited ingress permitted.



Totally protected against the ingress of dust. Protected against jets of water. Limited ingress permitted.

# HIGH & LOW BAY

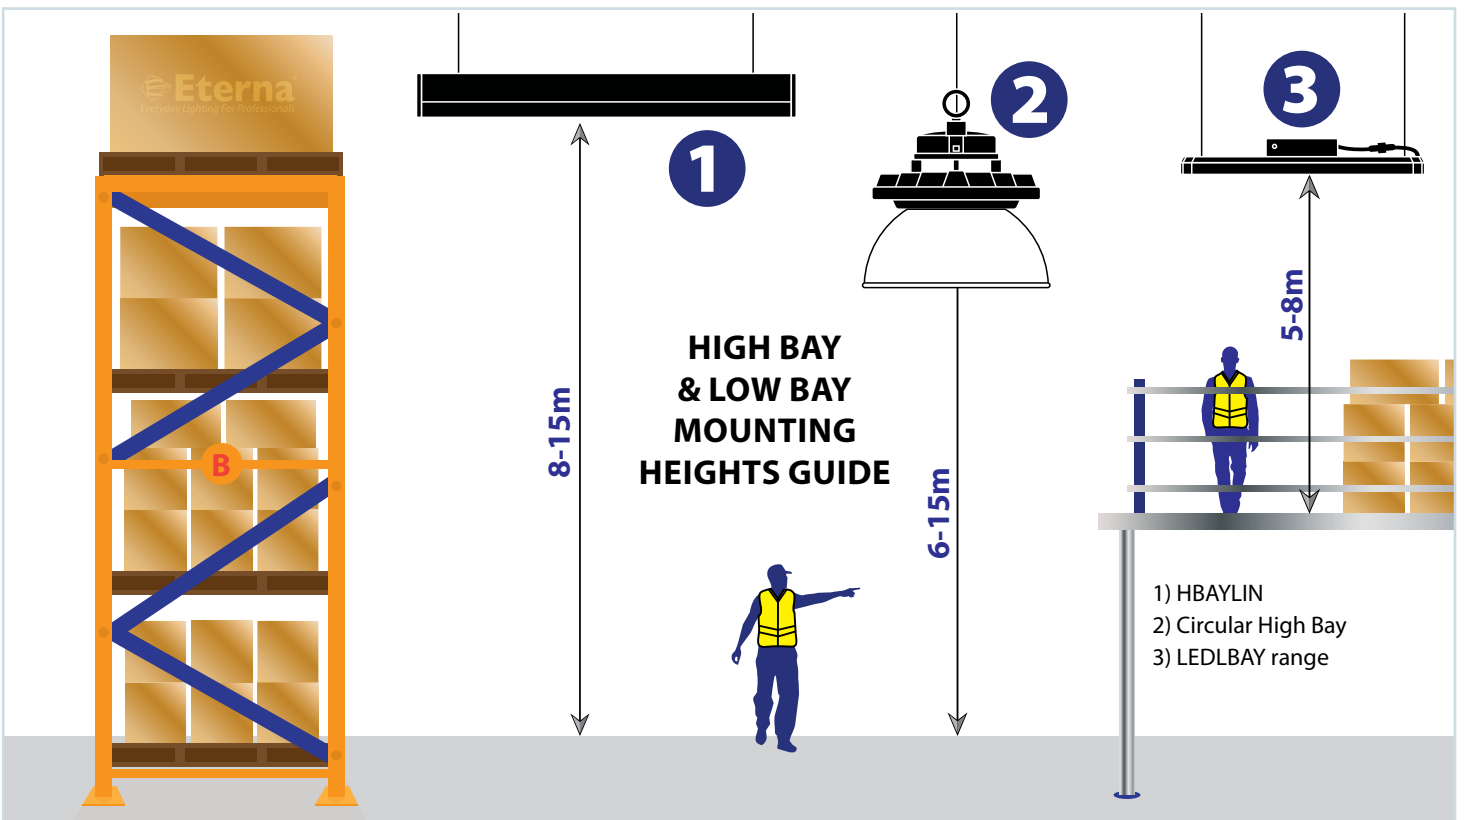



# HIGH & LOW BAY

LEDLBAY50 shown with bracket



## LINEAR LED LUMINAIRES




5 Year Warranty



**Not just a low bay!!** Although suitable for use as low bay for warehouse lighting the aesthetic design also lends itself to installation in public areas. IES files available to enable lighting plans

V2

- Frosted polycarbonate diffuser • Aluminium housing
- Suspension pack included, max length 1.5m
- Brackets available separately (see LBB range) for surface mounting or to enable installation with threaded rod
- Fitted with 1.5m mains input cable
- >119 lm/W • Earthed • IES files available

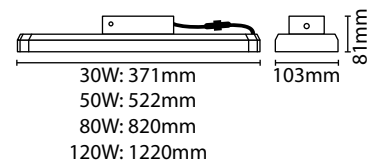

Code	Wattage	Colour Temp.	Lumens	Avg. Rated Life (Hrs)	IP Rating	MOM / OPQ
LEDLBAY30	30W	4000K	3622 lm	50,000 hrs	IP40	1 / 10
LEDLBAY50	50W		6263 lm			1 / 8
LEDLBAY80	80W		9734 lm			1 / 6
LEDLBAY120	120W		14309 lm			1 / 4
LBB3050	1 x 283mm Fixing Bracket For LEDLBAY30/50					1 / 20
LBB80	1 x 530mm Fixing Bracket For LEDLBAY80					1 / 20
LBB120	2 x 224mm Fixing Brackets For LEDLBAY120					1 / 40



## 150W LINEAR HIGHBAY WITH 90° LENS




5 Year Warranty



**Long life, high performance luminaire offering low energy consumption and high lumen output at 143 lumens per watt. Ideal replacement for traditional HID metal halide fittings. For use in racked areas of warehouses or many other applications such as manufacturing, leisure facilities and retail environments**

V1

- Aluminium housing, polycarbonate lens cover
- Supplied with 1.5m mains cable
- Includes adjustable hanging kit (1.5m length)
- Includes ceiling/wall tilt brackets
- Earthed • IES files available



Code	Wattage	Colour Temp.	Lumens	Avg. Rated Life (Hrs)	IP Rating	MOM / OPQ
HBAYLIN	150W	6300K	21460 lm	40,000 hrs	IP20	1 / 4



# HIGH & LOW BAY



HBCIR150PP



HBCIR150PP with  
HBCIRDIF90

## IP65 1-10V DIMMABLE LED CIRCULAR HIGH BAY WITH LIFUD DRIVER



**5**  
Year Warranty


IP65

IK08

Dimmable



- Aluminium housing, glass lens cover
- IK08 rated durable construction
- 1-10V dimmable capability as standard
- Supplied with 42cm mains input cable and 33cm 1-10V cable
- 50cm stainless steel safety cable attached
- Philips Lumileds SMD LEDs
- 169 lm/W
- Earthed • IES files available

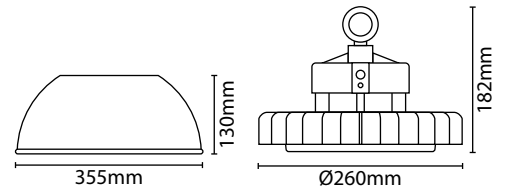

Code	Wattage	Colour Temp.	Lumens	Avg. Rated Life (Hrs)	IP / IK Rating	MOM / OPQ
HBCIR150PP	150W	3500K	25400 lm	50,000 hrs	IP65 IK08	1 / 1
HBCIRDIF90	90° Aluminium Reflector					1 / 20

# DOWNLIGHTS

## 30-60-90 MINUTE FIRE RATED GUIDE

- ✓ Building regulation Part B specifies the level of fire protection within properties – typically ceilings have to be 30, 60 or 90 minute rated
- ✓ Cutting a hole in the ceiling compromises its integrity
- ✓ It is important that fire rated downlights pass all three tests separately
- ✓ It is not safe to assume that passing the 90 minute test means a downlight would also pass the 30 and 60 minute tests
- ✓ Eterna fire rated downlights will maintain the original fire rating of 30, 60 and 90 minute ceilings
- ✓ In the event of a fire, intumescent material will expand to seal the hole and block the passage of fire from passing through the downlight




**ALL GUIDES CAN BE DOWNLOADED FROM OUR WEBSITE:** [www.eterna-lighting.co.uk/guides/](http://www.eterna-lighting.co.uk/guides/)



**PLEASE NOTE:** Due to the huge variety of dimmers in the market, dimming performance with all types cannot be guaranteed, compatibility should be tested before installation

# DOWNLIGHTS

## DIMMABLE COB LED RECESSED COLOUR TEMPERATURE SELECTABLE COMMERCIAL DOWNLIGHTS

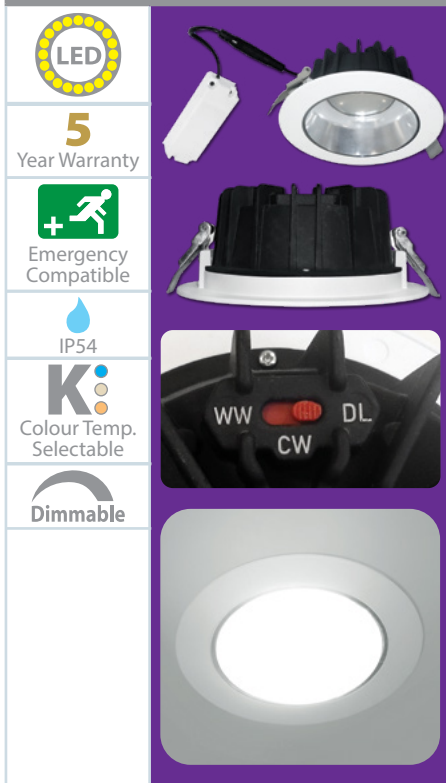

**5**  
Year Warranty



Emergency  
Compatible



**K**  
Colour Temp.  
Selectable




Dimmable

This range is ideal for many applications, with high lumen efficiency for enhanced energy saving and colour temperature selection allowing the desired lighting effect to be chosen on installation

V1

- Zero maintenance, integral light source providing instant light output
- LED performance allows for "like for like" replacement of fluorescent PL downlights
- Includes a plug and play constant current 0-10V dimmable LED driver
- Recessed light source with opal diffuser and polished reflector to reduce glare
- Flame retardant aluminium housing, includes spring clips to fix within the ceiling
- High CRI rating of >80, making them perfect for retail applications, minimising colour distortion
- Lumen efficacy of up to 114 lm/W • Double insulated • IES files available
- Ability to be converted into an emergency luminaire: see below for emergency battery packs



Code	Wattage	Colour Temp.	Lumens	Avg. Rated Life (Hrs)	IP Rating	Hole Cut Out Size	MOM / OPQ
COMRCS25	25W	3000K 4000K 6000K	1590 lm / 1710 lm / 1640 lm	45,000 hrs	IP54	150mm	1 / 20
Accessories							
EBPM3	10-60V 100W Max Battery Pack						1 / 1
SEEBPM3	Self Test 10-60V 100W Max Battery Pack						1 / 40
EBPM3LI	Li-Ion 18-60Vdc Maximum 150W Battery Pack						1 / 40

• Minimum free air space around the fitting 50mm. Cannot be directly covered with insulation

## DIMMABLE LED RECESSED COLOUR TEMPERATURE SELECTABLE COMMERCIAL DOWNLIGHTS



**5**  
Year Warranty



Emergency  
Compatible



**K**  
Colour Temp.  
Selectable




Dimmable

This range is ideal for many applications, with high lumen efficiency for enhanced energy saving and colour temperature selection allowing the desired lighting effect to be chosen on installation

V1

- Tough polypropylene construction • Double insulated • IES files available
- Colour temperature selectable - options of 3000K/4000K/6000K
- High CRI rating of >80, making them perfect for retail applications, minimising colour distortion
- Lumen efficacy of up to 113 lm/W
- Integral terminal connections E- & E+ allow luminaire to be used in 3 hour emergency mode when used with Eterna battery packs




Code	Wattage	Colour Temp.	Lumens	Avg. Rated Life (Hrs)	IP Rating	Hole Cut Out Size	MOM / OPQ
KCOMCS8	8W	3000K	845 lm / 872 lm / 847 lm	40,000 hrs	IP44	110mm	1 / 30
KCOMCS13	13W	4000K	1401 lm / 1475 lm / 1442 lm			165mm	1 / 20
KCOMCS18	18W	6000K	1985 lm / 2030 lm / 2025 lm			205mm	1 / 12
Accessories							
EBPM3	10-60V 100W Max Battery Pack (not compatible with KCOMCS18)						1 / 1
SEEBPM3	Self Test 10-60V 100W Max Battery Pack (not compatible with KCOMCS18)						1 / 40
EBPM3LI	Li-Ion 18-60Vdc Maximum 150W Battery Pack (not compatible with KCOMCS18)						1 / 40

## ECONOMY RECESSED LED DOWNLIGHTS



**5**  
Year Warranty

- Aluminium construction
- Multiple low power LED array: even, shadow free diffused light output
- Instant start to full illumination
- Unobtrusive design with neutral white trim
- 4000K colour temperature: for neutral white appearance
- Double insulated



V1

Code	Wattage	Colour Temp.	Lumens	Avg. Rated Life (Hrs)	IP Rating	Hole Cut Out Size	MOM / OPQ
VECORDL6	6W	4000K	480 lm	25,000 hrs	IP20	105mm	1 / 100
VECORDL12	12W		1200 lm			155mm	1 / 20
VECORDL24	24W		2400 lm			285mm	1 / 20

# DOWNLIGHTS

## DIMMABLE COB LED RECESSED COMMERCIAL DOWNLIGHTS



5  
Year Warranty



Emergency  
Compatible




Dimmable



This range is ideal for many applications, especially the retail environment, where the crisp bright lighting effect offered by the clear diffuser is often preferred

V1

- Zero maintenance, integral light source providing instant light output
- LED performance allows for "like for like" replacement of fluorescent PL downlights
- Includes a plug and play constant current 0-10V dimmable LED driver
- Recessed polished diamond facet reflector with glass front to reduce glare
- Flame retardant aluminium housing, includes spring clips to fix within the ceiling
- High CRI rating of >80, making them perfect for retail applications, minimising colour distortion
- Lumen efficacy of up to 113.6 lm/W • Double insulated • IES files available
- Ability to be converted into an emergency luminaire: see below for emergency battery packs

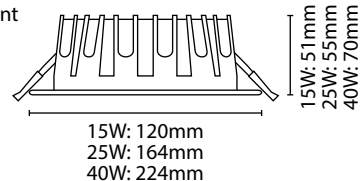

Code	Wattage	Colour Temp.	Lumens	Avg. Rated Life (Hrs)	IP Rating	Hole Cut Out Size	MOM / OPQ
COMDL15	15W	4000K	1705 lm	30,000 hrs	IP20	100mm	1 / 40
COMDL25	25W		2400 lm			140mm	1 / 20
COMDL40	40W		3500 lm			190mm	1 / 10
Accessories							
EBPM3	10-60V 100W Max Battery Pack						1 / 1
SEEBPM3	Self Test 10-60V 100W Max Battery Pack						
EBPM3LI	18-60Vdc 150W Max Li-Ion Battery Pack						1 / 40

• Minimum free air space around the fitting 150mm. Cannot be directly covered with insulation

## COLOUR TEMPERATURE SELECTABLE RECESSED FLAT DOWNLIGHTS



5  
Year Warranty




IP44

Colour Temp.  
Selectable




Fire Rated

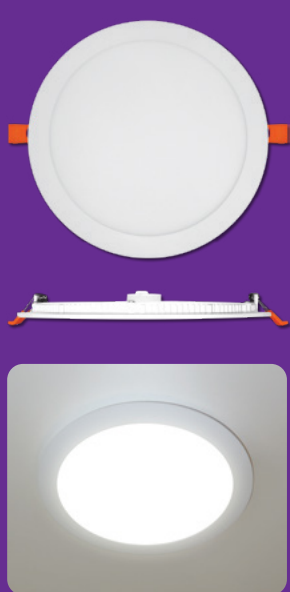

This range is ideal for many applications, with high lumen efficiency for enhanced energy saving and colour temperature selection allowing the desired lighting effect to be chosen on installation

V1

- Colour temperature selectable - options of 3000K, 4000K & 6000K easily set by a dip switch on the back of the fitting
- Flame retardant aluminium housing with polycarbonate diffuser, includes spring clips to fix within the ceiling
- Multiple LED low power array: even, shadow free diffused light output
- Zero maintenance, integral light source providing instant light output
- Flicker free operation • Lumen efficacy of up to 109 lm/W
- Slim profile design to allow installations with narrow ceiling voids
- Unobtrusive design with neutral white trim
- High CRI rating of >80, minimising colour distortion
- Double insulated • IES files available

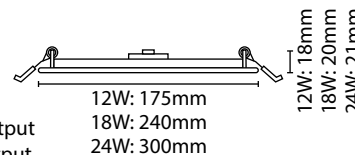

Code	Wattage	Colour Temp.	Lumens	Avg. Rated Life (Hrs)	IP Rating	Hole Cut Out Size	MOM / OPQ
KFLATDL12	12W	3000K	1250 lm / 1300 lm / 1250 lm	40,000 hrs	IP44 (front)	155mm	1 / 30
KFLATDL18	18W	4000K	1900 lm / 1970 lm / 1900 lm			220mm	1 / 20
KFLATDL24	24W	6000K	2500 lm / 2530 lm / 2520 lm			280mm	1 / 16

• Minimum free air space around the fitting 50mm. Cannot be directly covered with insulation

## IP65 MAINS SHOWER LIGHT CONVERTERS

1  
Year Warranty




IP65

Bathroom  
Zone 1 & 2



- Steel construction
- Requires 1 x GU10 energy saving lamp (not included). Fitting is rated at 50W max
- Sprung bezel pulls off to facilitate easy lamp change
- Double insulated

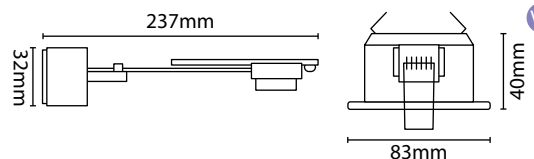

V1

Code	Colour	Wattage	IP Rating	Hole Cut Out Size	MOM / OPQ
SLGUCR	Polished Chrome	50W Max	IP65	70mm	5 / 50
SLGUSN	Brushed Nickel				
SLGUWH	White				



# DOWNLIGHTS


## LED FIRE RATED COLOUR AND POWER SELECTABLE DIMMABLE DOWNLIGHT



**Eterna's most flexible downlight; with dimmable LED, selectable power and selectable CCT, IP65 rating, plus fire rating for standard ceilings and I-Joist ceilings.**

V1

- Fixed pressed steel LED downlight with polycarbonate diffuser and 60mm cut out diameter
- Fire-rated for individual 30, 60 and 90 minute ceiling types
- Fire-rated for I-Joist ceiling types; separate 30 and 60 minute testing
- Power selectable - use the rear-mounted dip switch to select 5W or 8W to achieve preferred lumen output and energy usage
- Colour temperature selectable - easily select between 3000K, 4200K or 6500K to suit the application or preference
- Dimmable integrated LED light source (use compatible dimmer)
- Wide 60° beam angle and IP65 rating for general illumination of all general interior applications, including bathrooms
- Pre-wired with 10cm cable onto connector with push-fit terminal block - suitable for loop-in loop-out connection
- Complete with classic white bezel with foam back to seal against air permeability. Additional chrome, satin nickel or black bezels available

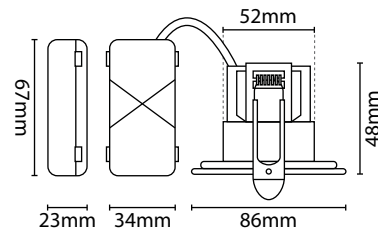


Code	Colour Temp.	5W Lumens	8W Lumens	Avg. Rated Life (Hrs)	IP Rating	Hole Cut Out Size	MOM / OPQ
FIRELEDPCS	3000K	475 lm	745 lm	50,000 hrs	IP65	60mmØ	1 / 40
	4200K	532 lm	849 lm				
	6500K	510 lm	790 lm				
<b>Accessories</b>							
FIRETRCR	Chrome trim						1 / 100
FIRETRSN	Brushed Nickel trim						
FIRETRBK	Black trim						

## ECONOMY LED IP65 FIRE RATED DIMMABLE DOWNLIGHT



- Pressed steel construction • 60° beam angle • Push terminals
- Fire rated tested for individual 30, 60 and 90 min ceiling types
- Dimmable - for optimum dimming performance we recommend using a compatible LED dimmer
- Foam bezel seals against air permeability
- Integrated chrome bezel with additional satin nickel and white bezels also included
- Double insulated • IES files available
- VECOIBRACK - polycarbonate construction

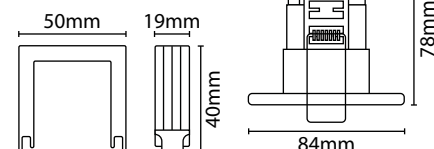

V1

Code	Wattage	Colour Temp.	Lumens	Avg. Rated Life (Hrs)	IP Rating	Hole Cut Out Size	MOM / OPQ
VECOIFIRE3	5W	3000K	540 lm	36,000 hrs	IP65	60mm	1 / 40
VECOIBRACK	Insulating Bracket						1 / 200


## 5W DIMMABLE FIRE RATED IP65 LED DOWNLIGHTS



**Compact and convenient design with high quality loop in, loop out terminal block**

V1

- Fire Rated - individually tested within 30, 60 and 90 minute ceiling constructions
- Foam bezel seals against air permeability
- Compact and convenient design
- 40° beam angle
- Push terminals
- Loop-in Loop-out wiring facility
- Earthed • IES files available



Code	Colour	Wattage	Colour Temp.	Lumens	Avg. Rated Life (Hrs)	IP Rating	Hole Cut Out Size	MOM / OPQ
KFIRE4CR	Polished Chrome	5W	4000K	515 lm	25,000 hrs	IP65 (front) IP20 (rear)	65mm	1 / 20
KFIRE4SN	Brushed Nickel							
KFIRE4WH	White							


# DOWNLIGHTS

## MAINS / LOW VOLTAGE CEILING DOWNLIGHT CONVERTERS

**1**  
Year Warranty



- Pressed steel construction • Fitting is rated at 50W max
- Supplied with ceramic GU10 & GU5.3 lampholders
- Pre-wired with low voltage lampholder, GU10 lampholder option also included
- Hole cut out 70-140mm: replaces a wide range of outdated downlights
- Shallow profile: neat, unobtrusive solution
- Converts traditional mains R50, R64 and R80 downlight and eyeball light source without expensive repairs & decoration
- Double insulated



Code	Colour	Wattage	IP Rating	Hole Cut Out Size	MOM / OPQ
CR80CR	Polished Chrome	50W Max	IP20	70mm -140mm	5 / 40
CR80SN	Brushed Nickel				
CR80WH	White				


## LED SURFACE / RECESSED CABINET DOWNLIGHTS



**5**  
Year Warranty



- Steel construction • Visually similar to 20W G4 halogen
- 3000K warm colour temperature: offering a pleasing lighting appearance
- 1.7W = 160 lumens: ideal low energy solution to standard halogen cabinet lights
- Not suitable for use with dimmers
- Pre-wired with 2m mains cable and no separate driver required: facilitating easy installation
- Mains voltage: integral driver • Double insulated



Code	Colour	Wattage	Colour Temp.	Lumens	Avg. Rated Life (Hrs)	IP Rating	Hole Cut Out Size	MOM / OPQ
CLEDCIR	Nickel	1.7W	3000K	160 lm	30,000 hrs	IP20	61mm	1 / 40
CLEDCIRWH	White							


## LED TRIANGLE CABINET DOWNLIGHT



**5**  
Year Warranty



- Steel construction • Visually similar to 20W G4 halogen
- 3000K warm colour temperature: offering a pleasing lighting appearance
- 1.7W = 160 lumens: ideal low energy solution to standard halogen cabinet lights
- Not suitable for use with dimmers
- Pre-wired with 2m mains cable and no separate driver required: facilitating easy installation
- Mains voltage: integral driver • Double insulated



Code	Wattage	Colour Temp.	Lumens	Avg. Rated Life (Hrs)	IP Rating	MOM / OPQ
CLEDTRI	1.7W	3000K	160 lm	30,000 hrs	IP20	1 / 40


## PLASTIC LED UNDER CABINET LIGHT



**5**  
Year Warranty








- Polycarbonate construction
- 3000K warm white colour temperature: offering a pleasing lighting appearance
- 2W = 100 lumens: ideal low energy solution to standard halogen cabinet lights
- Pre-wired with 2m mains cable and no separate driver required: facilitating easy installation
- Not suitable for use with dimmers
- Not suitable for recessed installation • Double insulated



Code	Version	Wattage	Colour Temp.	Lumens	Avg. Rated Life (Hrs)	IP Rating	MOM / OPQ
VECOBAPTR	Triangle	2W	3000K	100 lm	30,000 hrs	IP20	1 / 100

# BATHROOM LIGHTING


**PLEASE NOTE:  
BATHROOM SHAVER LIGHTS ARE NOT  
SUITABLE FOR TOOTHBRUSH CHARGERS**

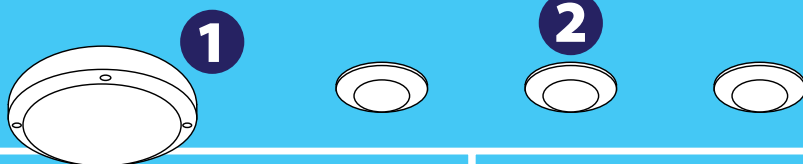

## BATHROOM LIGHTING GUIDE

all guides can be downloaded from our website: [www.eterna-lighting.co.uk/guides/](http://www.eterna-lighting.co.uk/guides/)

- 1) PACIFIC12 - Zone 1
- 2) FIRELEDPCS - Zone 1
- 3) LEDMIRROR - Zone 2
- 4) LEDSH6 range - Zone 3
- 5) LEDOM5 range - Zone 3
- 6) OMLD10 - Zone 2
- 7) LEDSH44 - Zone 3
- 8) LEDSHDVO - Zone 3

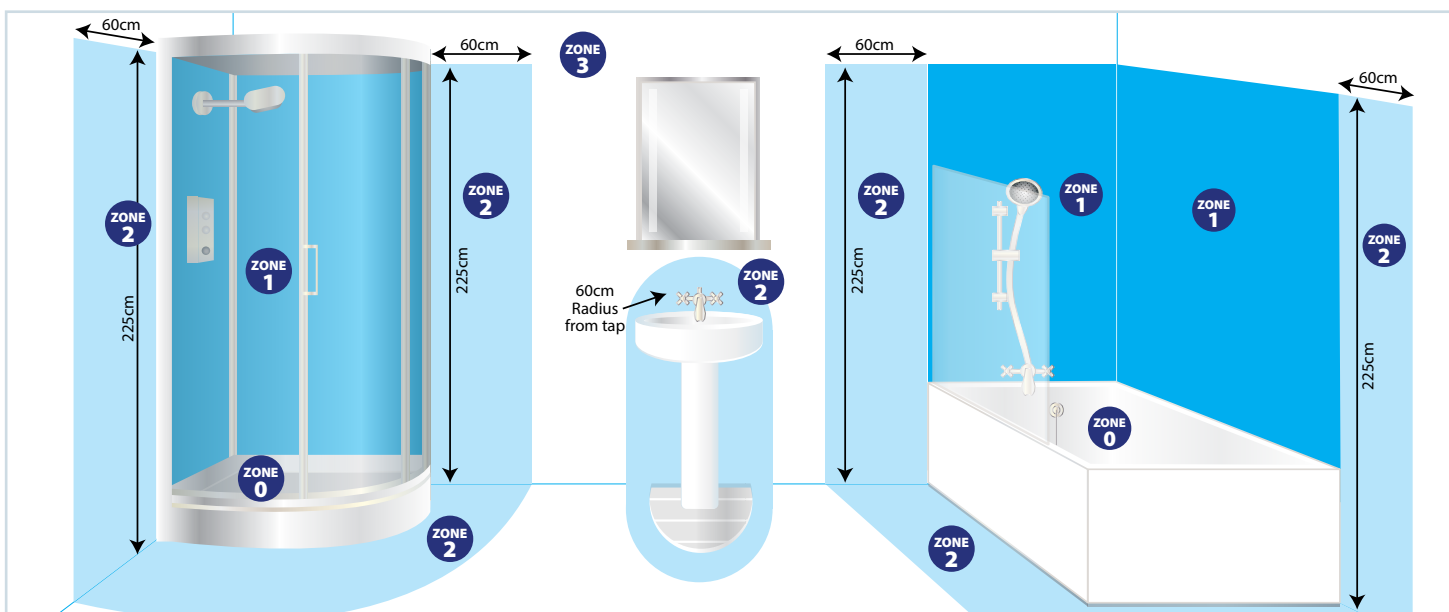

Bathroom Zone 0	Bathroom Zone 1	Bathroom Zone 2	Bathroom Zone 3
The interior of the bath or shower tray	Above the bath or shower tray to a height of 2.25 metres from the floor	Outside the bath or shower, extending 0.6 metres beyond zone 1 and including the area around wash basins	Outside zones 0, 1 or 2 and where no water jet is likely to be used for cleaning purposes. No specific IP rating is required.  If water jets are used for cleaning in zones 1, 2 or 3, a fitting must have a minimum IPx5 rating

# BATHROOM LIGHTING

## "DESIGNER STYLE" SHAVERLIGHT LUMINAIRES



### Contemporary "designer style" alternative to standard functional products

- Vertical or horizontal mounting • Elegantly integrated push switch
- IP21 rated and insulated class 2 construction
- Available in chrome or white to compliment most bathroom decors
- Permanent power to shaver socket allowing use when not illuminated
- Dual voltage 110V and 240V shaver socket located under a slide to open cover maintains sleek appearance when not in use
- Double insulated



Code	Colour	Wattage	Colour Temp.	Lumens	Avg. Rated Life (Hrs)	IP Rating	MOM / OPQ
LED5H6CR	Chrome	6W	3000K	520 lm	25,000 hrs	IP21	1 / 10
LED5H6WH	White						


**SEE PAGE 60 FOR MATCHING OVER MIRROR LIGHTS IN THIS RANGE**

## LED DUAL VOLTAGE SHAVER LIGHT



### Ever popular fittings offering functionality and long term performance for domestic and commercial bathrooms

- Polycarbonate construction • Optional fit chrome effect trims included
- Dual voltage shaver socket and safety isolating transformer: for bathroom use
- Permanent power to shaver socket: with a pull cord switch for isolated illumination
- Access cover to connection block: easy wiring from the front of the fitting
- Earthed




Code	Wattage	Colour Temp.	Lumens	Avg. Rated Life (Hrs)	Fitting IP Rating	Socket IP Rating	MOM / OPQ
LED5H44	5.5W	3000K	410 lm	25,000 hrs	IP44	IP21	1 / 10

## LED DUAL VOLTAGE SHAVER LIGHT



### Versatile fitting offering functionality and long term performance for domestic and commercial bathrooms

- Polycarbonate construction
- Requires 1 x S15 284mm double ended tubular lamp (included). Fitting is rated at 60W max
- Low energy consumption and prolonged lamp life
- Instant start, super bright LED's, 3000K warm colour temperature: offering a pleasing light appearance
- High CRI ≥80: minimises colour distortion of illuminated objects
- Dual voltage shaver socket and safety isolating transformer: for bathroom use
- Mains isolation upon diffuser removal
- **NOTE:** the shaver socket will only operate when the light is switched on
- Earthed




Code	Wattage	Colour Temp.	Lumens	Avg. Rated Life (Hrs)	IP Rating	MOM / OPQ
LED5HDVO	6W	3000K	400 lm	15,000 hrs	IP20	1 / 10

## 18W LOW ENERGY DUAL VOLTAGE SHAVER LIGHT



- Polycarbonate construction • Optional fit chrome effect trims included
- Requires 1 x 18W 2G11 single turn L 4 pin CFL lamp (included). Fitting is rated at 18W max
- Permanent power to shaver socket • Transformer is double-wound isolated
- Dual voltage shaver socket and safety isolating transformer: for bathroom use
- Access cover to connection block: easy wiring from the front of the fitting
- Dedicated low energy light source • Earthed



Code	Wattage	Colour Temp.	Lumens	Avg. Rated Life (Hrs)	Fitting IP Rating	Socket IP Rating	MOM / OPQ
SH1844DVO	18W	3500K	380 lm	10,000 hrs	IP44	IP21	5 / 10

# BATHROOM LIGHTING


## LED MIRROR LIGHT WITH DUAL VOLTAGE SHAVER SOCKET



5  
Year Warranty



- Pressed steel base & glass mirror
- Pull cord on/off switch
- Diffused rectangular light apertures: soft lighting effect
- Permanent power to integrated dual voltage shaver socket: eliminates the need for separate shaver socket
- Safety isolating transformer on shaver outlet • Earthed



V1


Code	Wattage	Colour Temp.	Lumens	Avg. Rated Life (Hrs)	IP Rating	MOM / OPQ
LEDMIRROR	10.3W	3000K	130 lm	30,000 hrs	IP44	1 / 1

## MIRROR LIGHT WITH DUAL VOLTAGE SHAVER SOCKET

1  
Year Warranty



- Requires 2 x 15W G13 T8 450mm fluorescent tubes (included). Fitting is rated at 15W max (per lampholder)
- Pull cord on/off switch
- Diffused rectangular light apertures: soft lighting effect
- Permanent power to integrated dual voltage shaver socket: eliminates the need for separate shaver socket
- Safety isolating transformer on shaver outlet: suitable for bathroom use
- High frequency electronic ballast: instant start, flicker free operation, and prolonged lamp life
- Earthed





V1

Code	Wattage	Colour Temp.	Lumens	Avg. Rated Life (Hrs)	IP Rating	MOM / OPQ
ML5040	2 x 15W	2700K	2 x 1010 lm	15,000 hrs	IP44	1 / 1


## "DESIGNER STYLE" OVER MIRROR LUMINAIRES

LEDOM5CR

LEDOM5WH

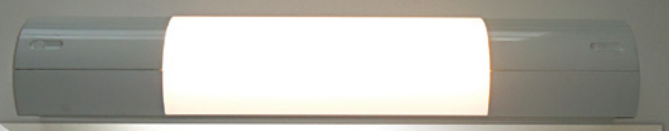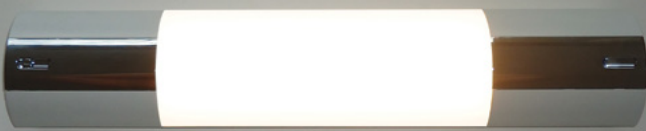


5  
Year Warranty

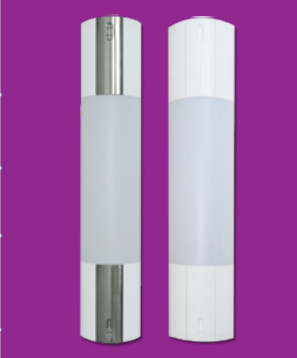

Contemporary "designer style" alternative to standard functional products

- Vertical or horizontal mounting • Elegantly integrated push switch
- IP21 rated and insulated class 2 construction
- Available in chrome or white to compliment most bathroom decors
- Double insulated



V1

Code	Colour	Wattage	Colour Temp.	Lumens	Avg. Rated Life (Hrs)	IP Rating	MOM / OPQ
LEDOM5CR	Chrome	5W	3000K	520 lm	25,000 hrs	IP21	1 / 10
LEDOM5WH	White						

## WHITE / MATT SILVER LED OVER MIRROR LIGHT



5  
Year Warranty



This stylish fitting is the perfect solution to provide additional task lighting in many applications. The fitting provides excellent light output and is a superb energy efficient and long life alternative to fluorescent products

- Aluminium base and PMMA diffuser
- Pull cord on/off switch • Sleek modern design
- Primarily designed for bathrooms, but equally useful for many other applications
- 10W = 1010 lumen output: low power consumption with enhanced life expectancy
- 3000K warm colour temperature: offering a pleasing lighting appearance • Earthed



V2

Code	Wattage	Colour Temp.	Lumens	Avg. Rated Life (Hrs)	IP Rating	MOM / OPQ
OMLED10	10W	3000K	1010 lm	30,000 hrs	IP44	1 / 20



# BATHROOM LIGHTING

## POLISHED CHROME IP44 LED CEILING/WALL LIGHT



5  
Year Warranty




Bathroom  
Zone 2



This stylish fitting is ideal for installation in a multitude of situations. Ceiling or wall mounted in a domestic or commercial setting and suitable for bathrooms. Long life, energy efficient alternative to traditional fluorescent luminaires

- Steel construction • Polished chrome finish • Corrosion resistant stainless steel fixing screws
- Multiple low power LED array & optically optimised diffuser: ensures a soft, even lighting effect with no degradation of light output
- Suitable for bathroom use • Push fit terminals
- 3100K warm colour temperature: offering a pleasing light appearance
- Earthed



Code	Wattage	Colour Temp.	Lumens	Avg. Rated Life (Hrs)	IP Rating	MOM / OPQ
PACIFIC12	12W	3100K	800 lm	30,000 hrs	IP44	1 / 5

## LED FIRE RATED COLOUR AND POWER SELECTABLE DIMMABLE DOWNLIGHT



5  
Year Warranty



Power  
Selectable

Colour Temp.  
Selectable




Fire Rated



Eterna's most flexible downlight; with dimmable LED, selectable power and selectable CCT, IP65 rating, plus fire rating for standard ceilings and I-Joist ceilings.

- Fixed pressed steel LED downlight with polycarbonate diffuser and 60mm cut out diameter
- Fire-rated for individual 30, 60 and 90 minute ceiling types
- Fire-rated for I-Joist ceiling types; separate 30 and 60 minute testing
- Power selectable - use the rear-mounted dip switch to select 5W or 8W to achieve preferred lumen output and energy usage
- Colour temperature selectable - easily select between 3000K, 4200K or 6500K to suit the application or preference
- Dimmable integrated LED light source (use compatible dimmer)
- Wide 60° beam angle and IP65 rating for general illumination of all general interior applications, including bathrooms
- Pre-wired with 10cm cable onto connector with push-fit terminal block - suitable for loop-in loop-out connection
- Complete with classic white bezel with foam back to seal against air permeability. Additional chrome, satin nickel or black bezels available

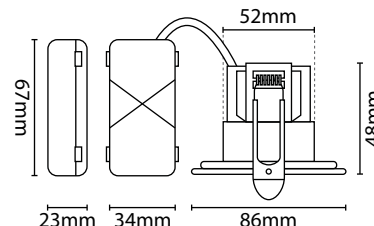

Code	Colour Temp.	5W Lumens	8W Lumens	Avg. Rated Life (Hrs)	IP Rating	Hole Cut Out Size	MOM / OPQ
FIRELEDPCS	3000K	475 lm	745 lm	50,000 hrs	IP65	60mmØ	1 / 40
	4200K	532 lm	849 lm				
	6500K	510 lm	790 lm				
Accessories							
FIRETRCR	Chrome trim						1 / 100
FIRETRSN	Brushed Nickel trim						
FIRETRBK	Black trim						

## IP65 MAINS SHOWER LIGHT CONVERTERS


1  
Year Warranty



Bathroom  
Zone 1 & 2



- Steel construction
- Requires 1 x GU10 energy saving lamp (not included). Fitting is rated at 50W max
- Sprung bezel pulls off to facilitate easy lamp change
- Double insulated




Code	Colour	Wattage	IP Rating	Hole Cut Out Size	MOM / OPQ
SLGU CR	Polished Chrome	50W Max	IP65	70mm	5 / 50
SLGU SN	Brushed Nickel				
SLGU WH	White				

# CABINET LIGHTING

Cabinet lighting creates an ambient atmosphere for your kitchen whilst maintaining its practicality.

Use our LED under cabinet lighting to direct light on worktops, keeping you safe whilst working with appliances and sharp objects.

Our LED cabinet light fittings can be easily utilised in many other applications where a subtle but powerful light is required in a covered dimly lit area.

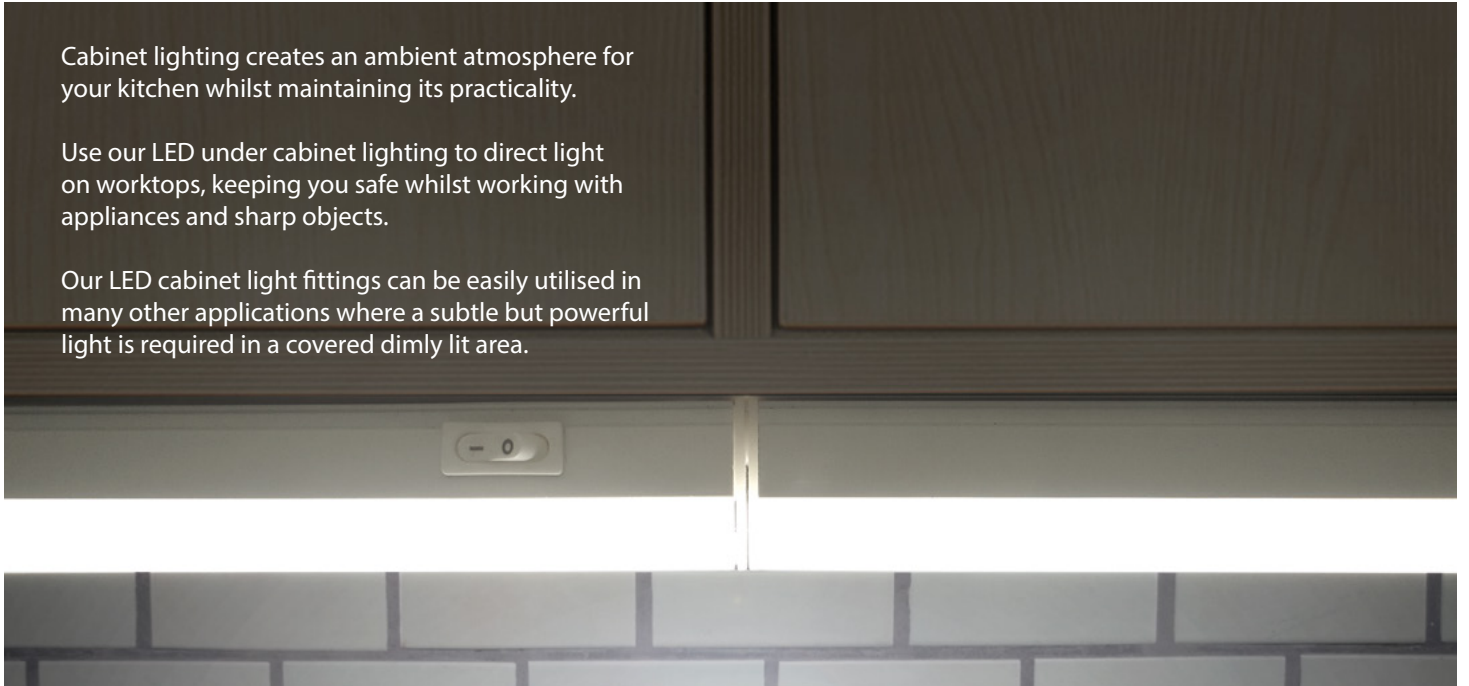

VECOABPTR  
Triangle under  
cabinet LED fitting



CLEDCIRWH  
Surface or recessed  
LED fitting



CLEDCIR  
Surface or recessed  
LED fitting



CLEDTRI  
Triangle under  
cabinet LED fitting



# CABINET LIGHTING



## LED SUPER FLAT STRIP LIGHTS




**5**  
Year Warranty



**Ultra low power consumption with excellent light output. The inclusion of a link lead and butt connector allows continuous linear, spaced linear or radial installations**

V2

- Aluminium and polycarbonate construction
- Ultra-bright warm white LEDs for a pleasing lighting effect (3000K colour temperature)
- Reeded diffuser for soft diffused light
- Fixing clips included for under-cabinet or wall installation
- 300mm link lead and butt connector included: allowing flexible linking options • Double insulated



### DRIVER:

- For use with SFLWW range only • Allows multiple strip lights to be linked
- Includes 0.5m mains cable & 2m fitting supply cable with amp-plug connector: easy installation
- Allows any combination of SFLWW9 & SFLWW15 upto a maximum power load of 36W: simply link the first fitting to the driver and subsequent fittings to each other

Code	Version	Rated Wattage	Colour Temp.	Lumens	Avg. Rated Life (Hrs)	IP Rating	MOM / OPQ
SFLWW9	9 LED	2.2W	3000K	230 lm	20,000 hrs	IP20	1 / 10
SFLWW15	15 LED	3.6W		360 lm			
SFLDR36	36W Constant Voltage Driver						1 / 20

## LINEAR T4 LINKABLE TRIPHOSPHOR UNDER CABINET FITTINGS

**1**  
Year Warranty




- **TUS6NL** requires 1 x 6W G5 T4 220mm fluorescent tube (included). Fitting is rated at 6W max
- **TUS20NL** requires 1 x 20W G5 T4 567mm fluorescent tube (included). Fitting is rated at 20W max
- Polycarbonate construction • Individual rocker switch • Link & light system compatible
- Incorporates plug and socket with through wiring: can be linked with up to 5 other fittings
- 2 metres link mains lead included • Double insulated

V1

### REPLACEMENT LAMPS (N64 RANGE):

- Glass construction • Not dimmable
- Specifically designed for use with Eterna brand fittings



Code	Length	Wattage	Colour Temp.	Lumens	Avg. Rated Life (Hrs)	IP Rating	MOM / OPQ
TUS6NL	270mm	6W	3400K	378 lm	10,000 hrs	IP20	5 / 50
TUS20NL	620mm	20W		1500 lm			
Replacement Lamps							
N64/3	341mm	10W	3400K	630 lm	10,000 hrs	IP20	10 / 200
N64/5	468mm	16W		1090 lm			
Accessories							
NL1WH	1m	White Link Lead				IP20	5 / 200

# CABINET LIGHTING

## ECONOMY T5 LED LINKABLE FITTING




5

Year Warranty



- Polycarbonate construction • Rocker switch
- Superb light output and lighting effect: low power consumption with enhanced life expectancy
- 1.8m mains lead with 22cm link lead: linkable with up to 5 other fittings
- Optically optimised diffuser: ensures a soft diffused light with no degradation of light output • Double insulated



V1

Code	Wattage	Colour Temp.	Lumens	Avg. Rated Life (Hrs)	IP Rating	MOM / OPQ
VECOLT54	4W	4000K	350 lm	30,000 hrs	IP20	1 / 30
VECOLT58	8W		710 lm			
VECOLT510	10W		880 lm			
VECOLT514	14W		1240 lm			

## LED SURFACE / RECESSED CABINET DOWNLIGHTS




5

Year Warranty



- Steel construction • Visually similar to 20W G4 halogen
- 3000K warm colour temperature: offering a pleasing lighting appearance
- 1.7W = 160 lumens: ideal low energy solution to standard halogen cabinet lights
- Not suitable for use with dimmers
- Pre-wired with 2m mains cable and no separate driver required: facilitating easy installation
- Mains voltage: integral driver • Double insulated



V1

Code	Colour	Wattage	Colour Temp.	Lumens	Avg. Rated Life (Hrs)	IP Rating	Hole Cut Out Size	MOM / OPQ
CLEDCIR	Nickel	1.7W	3000K	160 lm	30,000 hrs	IP20	61mm	1 / 40
CLEDCIRWH	White							

## LED TRIANGLE CABINET DOWNLIGHT




5

Year Warranty



- Steel construction • Visually similar to 20W G4 halogen
- 3000K warm colour temperature: offering a pleasing lighting appearance
- 1.7W = 160 lumens: ideal low energy solution to standard halogen cabinet lights
- Not suitable for use with dimmers
- Pre-wired with 2m mains cable and no separate driver required: facilitating easy installation
- Mains voltage: integral driver • Double insulated



V1


Code	Wattage	Colour Temp.	Lumens	Avg. Rated Life (Hrs)	IP Rating	MOM / OPQ
CLEDTRI	1.7W	3000K	160 lm	30,000 hrs	IP20	1 / 40

## PLASTIC LED UNDER CABINET LIGHT




5

Year Warranty

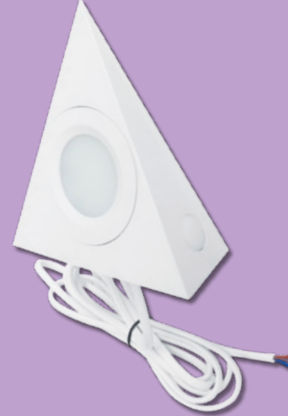

- Polycarbonate construction
- 3000K warm white colour temperature: offering a pleasing lighting appearance
- 2W = 100 lumens: ideal low energy solution to standard halogen cabinet lights
- Pre-wired with 2m mains cable and no separate driver required: facilitating easy installation
- Not suitable for use with dimmers
- Not suitable for recessed installation • Double insulated



V1

Code	Version	Wattage	Colour Temp.	Lumens	Avg. Rated Life (Hrs)	IP Rating	MOM / OPQ
VECOABPTR	Triangle	2W	3000K	100 lm	30,000 hrs	IP20	1 / 100



# GARDEN LIGHTING & SPOTLIGHTING


VECOWLPIRW



WGLEDBK



B1100BKNL

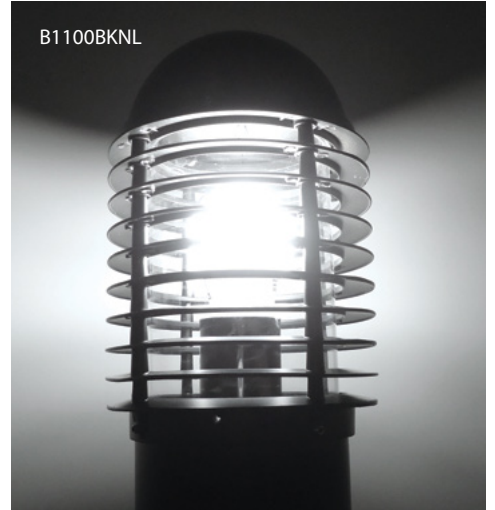

SPOTLEDGAR



WLPPTWIN - new  
version coming  
soon



VECOWLG



SLICELONG



SPOT2CR



WELLWHPIR



## LED CORNER FIXTURE FITTINGS




Flexible and decorative range of fittings ideally suited for outdoor applications requiring corner lights

- Complete solution for flat wall or corner mounting: bracket included for optional corner mounting
- Double insulated

### PIR VERSION:


- Factory preset 120° PIR • 10 lux - 7 minutes duration
- No override facility

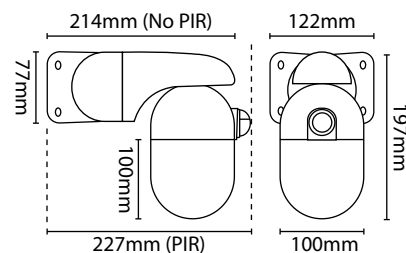


V1

Code	Colour	Version	Wattage	Colour Temp.	Lumens	Avg. Rated Life (Hrs)	IP Rating	MOM / OPQ
WELLWHSTD	White	Standard	10W	4000K	660 lm	25,000 hrs	IP65	1 / 6
WELLBKSTD	Black							
WELLWHPIR	White	120° PIR						
WELLBKPIR	Black							

## LED CORNER FIXTURE FITTINGS

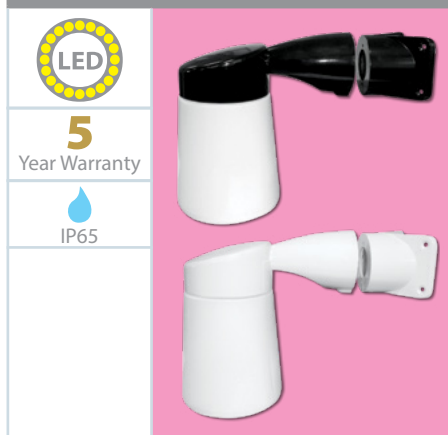

- This luminaire is supplied with a 9W LED ES (E27) 'A' Shape lamp – maximum 23W
- Bracket included for optional corner mounting: complete solution for flat wall or corner mounting
- Aluminium alloy construction in white or black finish with white polycarbonate diffuser
- Low energy consumption and prolonged lamp life • BESA box mounting
- Lamp included - 1 year warranty • Earthed



V3

Code	Colour	Wattage	Colour Temp.	Lumens	Avg. Rated Life (Hrs)	IP Rating	MOM / OPQ
WGLED BK	Black	8.9W	2700K	810 lm	15,000 hrs	IP65	1 / 4
WGLED WH	White						
WELLDIFF	White Replacement Polycarbonate Diffuser						1 / 1


## SURFACE LED WALL LIGHTS



- Polycarbonate construction suitable for coastal areas • Opal diffuser • Integral driver • Double insulated
- Downward facing opal diffuser gives a pleasing wall washed effect • IES files available

### PIR VERSIONS:


- PIR Time on adjustment 5 secs - 8 mins • 160° detection angle
- 8 meter detection range
- Lux level adjustments - option for day and night time operation or night time operation only



V1


Code	Colour	Version	Wattage	Colour Temp.	Lumens	Avg. Rated Life (Hrs)	IP Rating	MOM / OPQ
VECOWLW	White	Standard	6W	4000K	340 lm	30,000 hrs	IP65	1 / 20
VECOWLG	Grey							
VECOWLPIRW	White	160° PIR						
VECOWLPIRG	Grey							

## 1100MM LOUVRED BOLLARD

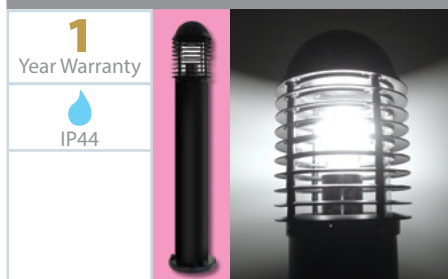


- Requires 1 x ES (E27) lamp (not included). Fitting is rated at 100W max
- Aluminium construction
- Root or flange fixing: versatile installation options
- Louvred diffuser: discreet lighting effect
- Earthed

Code	Wattage	IP Rating	MOM / OPQ
B1100BKNL	100W Max	IP44	1 / 1



V1

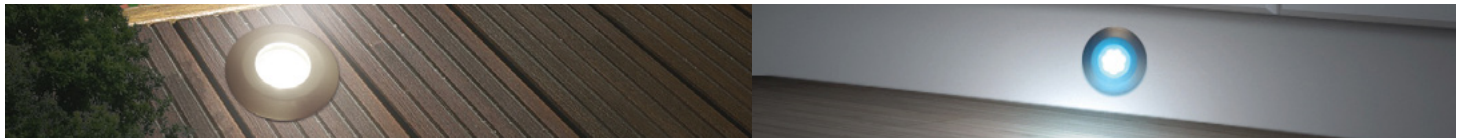


## 2W LED DECK / PLINTH LIGHT



Mains voltage LED compact recessed fixture equally useful for exterior use such as deck lighting, or for interior use recessed into plinths

V2

- Crisp white light or various colour effects using the included blue, red and green filters
- Hole cut out 40mm (if fitted without sleeve)
- Pre-wired with 1m rubber cable
- Complete with mounting sleeve for use in solid surfaces
- Anodized aluminium finish
- Double insulated



Code	Wattage	Colour Temp.	Lumens	Avg. Rated Life (Hrs)	IP Rating	Hole Cut Out Size	MOM / OPQ
DECKLED	2W	4000K	205 lm	30,000 hrs	IP65	40mm	1 / 50

## GU10 DECK LIGHT WITH STAINLESS STEEL BEZEL




- Cast alloy body • Not suitable for immersion in water
- Requires 1 x suitable GU10 lamp (not included). Fitting is rated at 50W max
- Pre-wired with 1m of rubber cable to terminal box: easy installation with loop out facility from 3 way terminal box
- GU10 lampholder allows a variety of different light sources • Earthed

V1

### LAMP GUIDE:

- T<40°C - ANY locations - 7W Max GU10 LED
- T<65°C - MOST locations - 9W Max GU10 CFL
- T>100°C - OUT OF REACH locations - 50W Max GU10 Halogen



Code	Wattage	IP Rating	Hole Cut Out Size	MOM / OPQ
GDL50SS	50W Max	IP68	92mm	4 / 24


## LED SLIM SURFACE BRICKLIGHT



Superslim surface mounting mains voltage LED amenity fixtures for garden and path illumination, which offers a fantastic alternative to traditional bricklights without the hassle of recessed installation

V1

- ABS housing, polycarbonate diffuser
- Double insulated
- IES files available



Code	Wattage	Colour Temp.	Lumens	Avg. Rated Life (Hrs)	IP Rating	MOM / OPQ
SLICELONG	3W	4000K	188 lm	30,000 hrs	IP65	1 / 24


## LED RECESSED BRICKLIGHT WITH STAINLESS STEEL FRAME



A modern design that gives an instant cool white light. Ultra low energy consumption and prolonged lamp life

V2

- Polycarbonate construction • Integral driver • Cable gland included
- Opal diffuser with optional stainless steel frame offering a soft, stylish lighting effect
- Hole cut out size: L: 228mm, D: 75mm, H: 98mm • Double insulated



Code	Wattage	Colour Temp.	Lumens	Avg. Rated Life (Hrs)	IP Rating	MOM / OPQ
BRICKLED	4.5W	6000K	285 lm	30,000 hrs	IP65	1 / 6



# GARDEN LIGHTING & SPOTLIGHTING


## EXTERNAL STAINLESS STEEL WALL LIGHTS

**1**  
Year Warranty

 IP44



- Requires: 1 x 35W Max. 240V GU10 halogen or LED lamp per lampholder (not included)
- Stainless steel construction
- Modern attractive design
- Easy lamp change
- Fully adjustable head (SSWLDIR only)
- Earthed

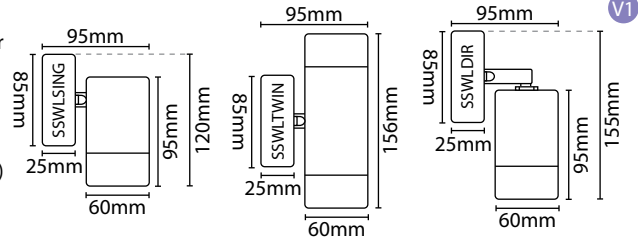

Code	Version	Wattage	IP Rating	MOM / OPQ
SSWLSING	Single Up Or Down Lighting	35W Max	IP44	1 / 12
SSWLTWIN	Twin Up & Down Lighting			
SSWLDIR	Single Directional Lighting			

## EXTERNAL ALUMINIUM LED WALL & GARDEN SPOTLIGHT


 LED

**5**  
Year Warranty

 IP44



- Aluminium construction & frosted glass lens
- Integrated driver and LED light source
- Fully adjustable head
- Earthed



Code	Version	Wattage	Colour Temp.	Lumens	Avg. Rated Life (Hrs)	IP Rating	MOM / OPQ
SPOTLEDWAL	Wall	4.3W	4000K	240 lm	30,000 hrs	IP44	1 / 12



## EXTERNAL AMENITY WALL LIGHTS



**Heki IP65 WALL LIGHTS COMING SOON!**




## INTERNAL GU10 STAINLESS STEEL SPOTLIGHTS

1

Year Warranty

V1

- Pressed steel construction
- Requires: 1 x 50W Max. 240V GU10 halogen or LED lamp per lampholder (not included)
- Contemporary design for a stylish interior spotlight solution
- Fully adjustable head(s): provides a fully adjustable directional light source • Earthed

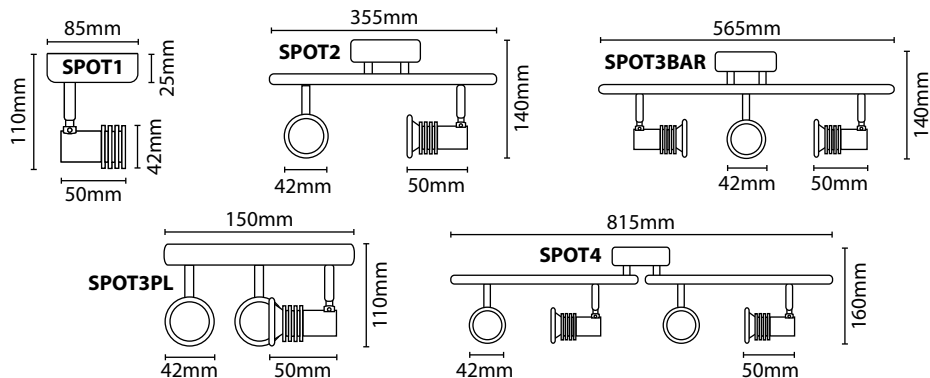

Code	Colour	Version	Wattage	IP Rating	MOM / OPQ			
SPOT1CR	Polished Chrome	Single	1 x 50W Max	IP20	1 / 36			
SPOT1SN	Brushed Nickel							
SPOT1WH	White							
SPOT2CR	Polished Chrome	Twin Bar	2 x 50W Max		IP20	1 / 12		
SPOT2SN	Brushed Nickel							
SPOT2WH	White							
SPOT3CRBAR	Polished Chrome	Triple Bar	3 x 50W Max			IP20	1 / 6	
SPOT3SNBAR	Brushed Nickel							
SPOT3WHBAR	White							
SPOT3CRPL	Polished Chrome	Triple Plate	3 x 50W Max				IP20	1 / 12
SPOT3SNPL	Brushed Nickel							
SPOT3WHPL	White							
SPOT4CR	Polished Chrome	Quad Split Bar	4 x 50W Max	IP20				1 / 12
SPOT4SN	Brushed Nickel							
SPOT4WH	White							

SPOT4SN shown





# LANTERNS


VECOHIPRKB



VECOFBK



ALULANTPIR

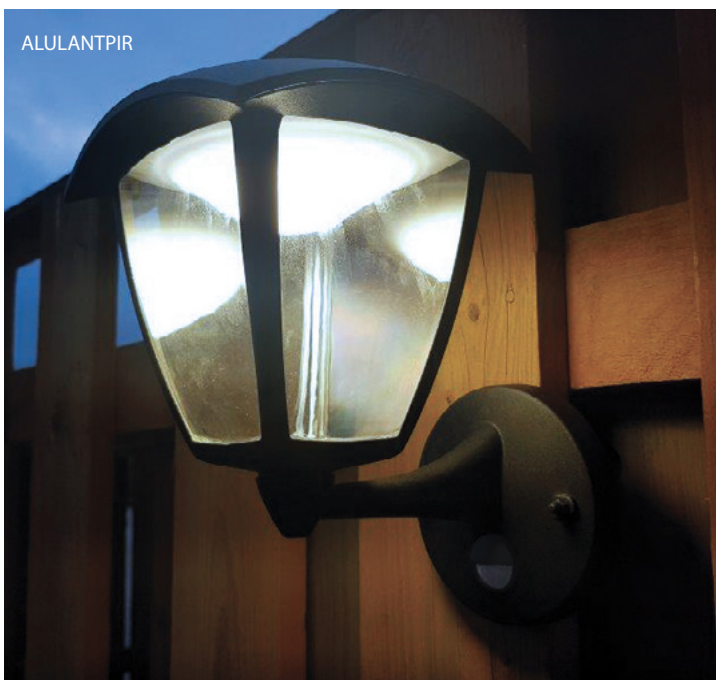

PIRHL60WH



## COMMON LANTERN IP RATINGS



IP44

The access probe of 1.0mm diameter shall not penetrate. Protected against water splashed from all directions. Limited ingress permitted.



IP65

Totally protected against the ingress of dust. Protected against jets of water. Limited ingress permitted.

# LANTERNS

## LED ALUMINIUM LANTERNS



**5**  
Year Warranty




An aesthetically pleasing outdoor fitting with superior construction for domestic and commercial applications

- Die-cast aluminium construction • Polycarbonate diffuser
- Earthed

### PIR VERSION:

- 7 metre detection range • 110° detection angle
- Time on adjustment 8 sec - 8 min • Lux level adjustment 5 lux - 2000 lux



Code	Version	Wattage	Colour Temp.	Lumens	Avg. Rated Life (Hrs)	IP Rating	MOM / OPQ
ALULANT	Standard	8W	4000K	570 lm	30,000 hrs	IP44	1 / 6
ALULANTPIR	110° PIR						

## LED ECONOMY LANTERNS



**5**  
Year Warranty




Energy efficient LED alternative to traditional lanterns

- Tough polycarbonate construction
- Double insulated

### PIR VERSION:

- Time on adjustment 5 secs - 5 mins
- Lux level adjustments
- 120° detection angle
- 8 metre detection range

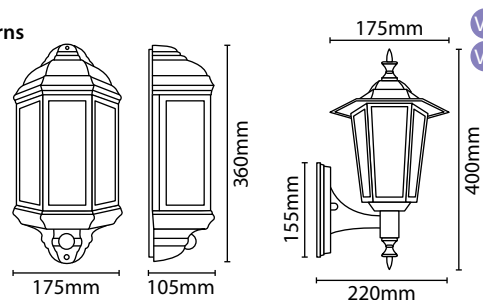

Code	Version	Wattage	Colour Temp.	Lumens	Avg. Rated Life (Hrs)	IP Rating	MOM / OPQ
VECOFBK	Standard Full Lantern	7W	3100K	420 lm	35,000 hrs	IP44	1 / 4
VECOPIRBK	120° PIR Full Lantern						
VECOHBK_V2	Standard Half Lantern		3000K	510 lm	50,000 hrs		1 / 10
VECOPIRBK_V2	120° PIR Half Lantern						

## POLYCARBONATE ES (E27) LANTERNS

**1**  
Year Warranty




- Requires 1 x suitable ES lamp (not included). Fitting is rated at 60W max
- Polycarbonate construction: corrosion resistant
- One piece lens: quick and easy assembly
- Double insulated

### HALF LANTERN PIR VERSIONS:

- 12 metre max detection range • Time on 3 minutes ± 20 sec
- 120° detection zone • Factory preset PIR - no override facility

### FULL LANTERN PIR VERSION:

- 10 metre range with sensitivity adjustment control
- Time on adjustable (10±5) secs - (4±1) min • 110° detection zone
- Factory preset PIR - no override facility

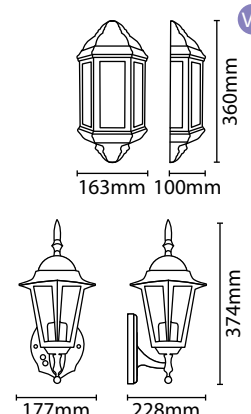

Code	Colour	Version	Wattage	IP Rating	MOM / OPQ
HL60B	Black	Standard Half Lantern	60W Max	IP44	1 / 12
HL60WH	White				
PIRHL60BK	Black	120° PIR Half Lantern			
PIRHL60WH	White				
L60B	Black	Standard Full Lantern			
PIRL60BK	Black	110° PIR Full Lantern			



# HAND DRYERS & HEATING

## WINTER ESSENTIALS

During the cold months, an extra source of warmth can be very welcome for your customers coming in from the cold.

3KW SCREEN HEATER

SH3WH



2KW ADJUSTABLE DOWNFLOW HEATER WITH RUNBACK TIMER

DFHT2KW



# HAND DRYERS & HEATING



HDA-1800



SSHDA-2500


## 1.8KW HIGH PERFORMANCE AUTOMATIC HAND DRYER

**1**  
Year Warranty

IPX1



- Cast aluminium construction • Tough vandal resistant construction
- Automatic operation: reduced cleaning requirement & increase hygiene
- Adjustable proximity sensitivity: allows user preference for on switching
- Pre-wired with 1 metre of mains lead: easy installation • Earthed
- Air speed: 17.8m/sec: rapid hand drying • Airflow: 2.6m<sup>3</sup>/min.



Code	Wattage	IP Rating	MOM / OPQ
HDA-1800	1.8kW	IPX1	1 / 4


## 2.5KW HIGH PERFORMANCE AUTOMATIC HAND DRYER

**1**  
Year Warranty

IPX1



- Cast aluminium tough vandal resistant construction
- Modern stainless steel effect finish
- Pre-wired with 1m of mains lead: easy installation • Earthed
- Automatic operation: reduced cleaning requirement & increased hygiene
- Airflow 4.5m<sup>3</sup>/min. • Air speed 30m/sec.: rapid hand drying




Code	Wattage	IP Rating	MOM / OPQ
SSHDA-2500	2.5kW	IPX1	1 / 4

## TUBULAR HEATERS AND GUARDS

**1**  
Year Warranty




- Steel construction • Thermal overload cut out • Earthed
- Pre-wired with 1m mains lead: easy installation
- Additional locking cable gland included for through wiring / linking to other tubular heaters
- Mounting brackets included for wall or floor installation
- Low wattage solution for localised background heat and frost protection

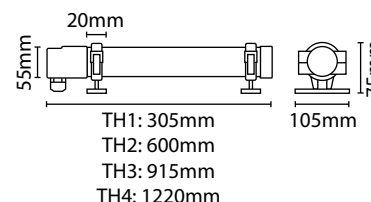

### TUBULAR HEATER GUARD:

- Steel construction • Fixing kit included
- Robustly constructed wire guard: provides protection and safety
- Colour matches tubular heater
- Aesthetically pleasing curved design



Code	Version	Wattage	IP Rating	MOM / OPQ
<b>Heaters</b>				
TH1	1ft Heater	60W	IP44	1 / 20
TH2	2ft Heater	120W		1 / 12
TH3	3ft Heater	180W		1 / 9
TH4	4ft Heater	240W		1 / 6
<b>Heater Guards</b>				
TRG1FT	1ft Guard			2 / 18
TRG2FT	2ft Guard			2 / 12
TRG3FT	3ft Guard			2 / 6
TRG4FT	4ft Guard			2 / 6




# HAND DRYERS & HEATING

## 2.4KW PLINTH FAN HEATER WITH 3 COLOUR FASCIAS

**1**  
Year Warranty



- Pressed steel construction • Airflow 0.85m<sup>3</sup>/min • Earthed
- Three fascias included: brown, white & stainless steel: complete solution reducing stock requirements
- Thermostatically controlled with thermal cut out: controllable temperature point for economic operation
- Pre-wired with 1.5m of mains lead: easy installation • Rubber feet: assist quiet operation
- Three settings for flexible heat output to suit room size:
  - 8kW fan only operation - 1.6kW half heat and fan - 2.4kW full heat and fan




Code	Wattage	IP Rating	MOM / OPQ
PFH2400	2.4kW	IP20	1 / 4

## 3KW SCREEN HEATER

**1**  
Year Warranty



- Pressed steel construction • Earthed
- Pre-wired with 1.25m mains lead: easy installation
- Airflow 1.07m<sup>3</sup>/min • Air speed 3m/sec
- Illuminated switch • Quiet running
- Three settings for flexible heat output to suit room size:
  - 2.5kW fan only operation - 1.5kW half heat and fan - 3kW full heat and fan



Code	Wattage	IP Rating	MOM / OPQ
SH3WH	3kW	IP20	1 / 1

## 2KW ADJUSTABLE DOWNFLOW HEATER


**1**  
Year Warranty



IP21



- Thermoplastic construction • Up to 2kW heat output: fast heating
- Mains indicator light • Thermal cut out • Pull cord on/off switch
- Internal adjustable thermostat: controllable temperature point for economic operation
- Internal load switch 1kW / 2kW: allows output adjustment to suit room size
- Double insulated



### HEATING SETTINGS:

I = 1kW fixed heat / II = 2kW variable thermostat controlled\*

\*Once desired temperature is met, fitting will drop down to 1kW - this fitting will not turn itself off

Code	Wattage	IP Rating	MOM / OPQ
DFH2KW	2kW	IP21	1 / 6

## 2KW ADJUSTABLE DOWNFLOW HEATER WITH RUNBACK TIMER


**1**  
Year Warranty



IP21



- Fire retardant Polycarbonate & ABS construction • Double insulated
- Up to 2kW heat output: fast heating • Mains indicator light
- Pull cord on/off switch • Thermal cut out
- Internal load switch 1kW / 2kW: allows output adjustment to suit room size
- Up to 35 minute runback timer - adjustable upon installation



### DIP SWITCH MODES OF OPERATION:\*

- 1 - On position 1kW / Off position 2kW
- 2 - On position 5 minutes
- 3 - On position 10 minutes
- 4 - On position 20 minutes

\*You can have multiple time dip switches selected at one time, this allows you to add the times together e.g dip switch 2 and 3 on = 15 minutes

Code	Wattage	IP Rating	MOM / OPQ
DFHT2KW	2kW	IP21	1 / 6

## OIL FILLED HEATERS

**1**  
Year Warranty





Free-standing, compact and quiet oil-filled heater optimised for heat storage, with 4 wheels for easy manoeuvrability. Comes with three heat settings and adjustable thermostat for control. Provides peace of mind with overheat protection and a tip-over safety switch. Keeps things tidy with an integral store for the 1.5m cord and plug. Ideal for domestic and office environments.

- Fully adjustable thermostat
- Overheat protection for additional safety and peace of mind
- Anti-tip protection automatically switches off the unit if knocked over
- Multi-directional wheels
- Illuminated control switches when powered on
- Fitted with 1.5m cable with 10A plug
- Built-in cable and plug storage

- OILHT157 - 3 heat settings: 600W, 900W, 1500W
- Metal construction with 7 fins

- OILHT211/T - 3 heat settings - 800W, 1200W, 2000W
- Metal construction with 9 fins

**NOTE:** as with all portable heating appliances - this product is only suitable for well insulated spaces or occasional use



V2

157 - 350mm  
211 - 430mm  
211T - 430mm

157 - 230mm  
211 - 230mm  
211T - 230mm

157 - 540mm  
211 - 540mm  
211T - 630mm

Code	Version	Colour	Wattage	IP Rating	MOM / OPQ
OILHT157	Standard	Beige	1.5kW	IP20	1 / 1
OILHT211			2kW		
OILHT211T	24 Hour Timer				


## 2KW CONVECTOR HEATERS

**1**  
Year Warranty




- Steel construction • Built in carry handles
- Illuminated control switches
- 3 heat settings: 750W, 1.25kW, 2kW
- Fitted with 1.5m flex and 13A BS1363 moulded plug
- Fully adjustable thermostat • Over heat protection

**NOTE:** as with all portable heating appliances - this product is only suitable for well insulated spaces or occasional use and not suitable for wall mounting



Code	Version	Wattage	IP Rating	MOM / OPQ
CONVHTSTD	Standard	2kW	IP20	1 / 1
CONVHTTIM	24 Hour Timer			

All of our handy guides can be downloaded and printed from our website for **FREE**

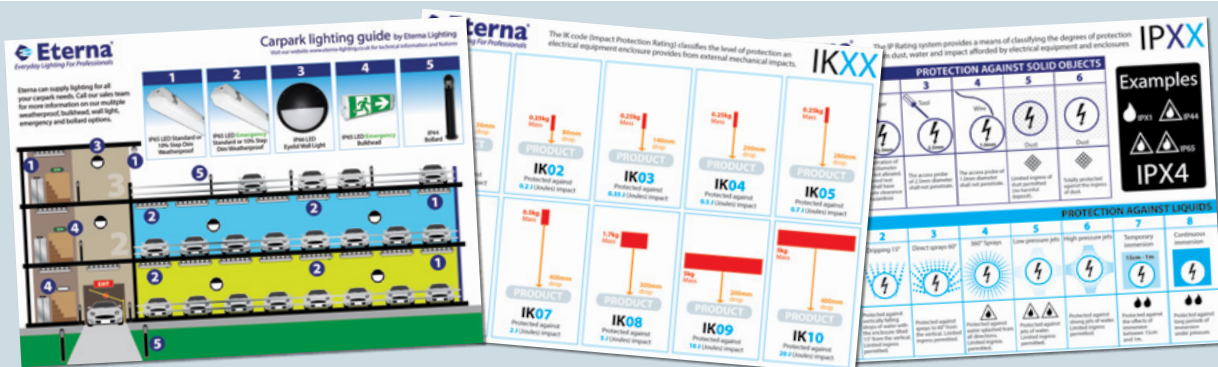

# LIGHTING CONTROLS

## PIR SENSORS

When a moving object or person moves across the PIR's detection zone, the PIR will trigger the motion sensor to activate the linked light source

## PHOTOCELLS

When a light source is controlled by a photocell, then the light is only activated during the Lux level and time selected

## MW SENSORS

Have the same capability as PIR sensors with the added control of detecting movement over various temperatures and can cover much larger areas such as warehouses

## TIME DELAY SWITCHES

These are useful in areas where lights are inadvertently left on. These switches allow the lights to be on for a set period of time only

## LIGHTING CONTROLS FOR ADDED SECURITY

Lighting controls are a great cost effective way to add extra security to your building. Lighting controls are a great way to only trigger the light output when necessary instead of keeping the lights on at all times.

# LIGHTING CONTROLS



All products have an install guide that can be downloaded from each individual products' website page, please refer to this for extra settings and installation information on your product.

## STAND ALONE INTERNAL 360° PIR SENSOR


1  
Year Warranty



360° PIR



- Polycarbonate construction • Double insulated
- 1600W incandescent, 500W fluorescent load capacity
- Max. 200W LED load capacity (no more than eight lights)
- Adjustable lux level • Time on adjustable: 10 sec - 15 min
- 4.5 metre radius range • 360° detection zone



Code	IP Rating	MOM / OPQ
SA360PIR	IP20	1 / 50

## FLUSH MOUNTED 360° INTERNAL PIR DETECTOR

1  
Year Warranty




IPX4



360° PIR



- Polycarbonate construction • Double insulated
- Time on adjustable: 10 sec - 15 min • Adjustable lux level
- 4.5 metre detection zone • 360° detection area
- Max 2000W incandescent / 500W fluorescent load capacity Max 250W LED load capacity (no more than eight lights)
- Recessed spring clip flush fixing: nonobtrusive when installed



Code	IP Rating	Hole Cut Out Size	MOM / OPQ
PIRFM360	IPX4	63mm	1 / 4

## IP44 EXTERNAL 360° PIR DETECTOR

1  
Year Warranty




IP44



360° PIR



- ABS construction • Double insulated
- Vertically & horizontally adjustable PIR head
- Bracket included for optional corner mounting: versatile installation options to suit a wide range of requirements
- 1000W incandescent lamp / 300W fluorescent / 150W LED (no more than eight lights) load capacity
- Time on adjustable: 5 sec - 5 min • 12 metre detection area
- Adjustable lux level • 360° detection zone



Code	IP Rating	MOM / OPQ
EX360PIRWH	IP44	1 / 20

## EXTERNAL PIR DETECTORS

1  
Year Warranty




IP44



110°/180° PIR



- ABS construction • Double insulated
- Time on adjustable: 5 sec - 5 min
- Vertically & horizontally adjustable detector
- 1000W incandescent / 300W fluorescent maximum load capacity
- Maximum 200W LED load capacity (no more than eight lights)
- 110° / 180° detection zone
- Adjustable lux level • 12 metre range

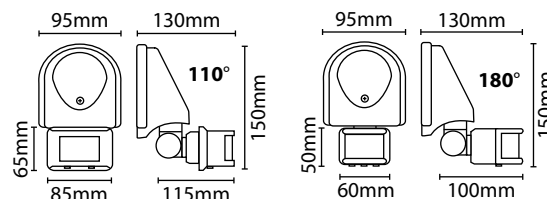

Code	Colour	Version	IP Rating	MOM / OPQ
PIR110BK	Black	110° PIR	IP44	1 / 30
PIR180BK	Black	180° PIR		
PIR180WH	White	180° PIR		




# LIGHTING CONTROLS

## TIME DELAY PUSH SWITCH

**1**  
Year Warranty



- ABS construction • Red neon switch perimeter glow light
- Compatible with LED, fluorescent and incandescent loads
- Three load settings - 5-20W, 20-150W, 150-300W
- No neutral connection required: can replace existing switch with no additional wiring
- Time on adjustable between 12 seconds and 12 minutes
- Double insulated




Code	IP Rating	MOM / OPQ
PUSHLED	IP20	1 / 40

## ELECTRONIC TIME DELAY PUSH SWITCH

**1**  
Year Warranty



- ABS construction • Max load rating: 6 Amp incandescent 1440W
- Time on adjustable between 12 seconds and 12 minutes
- Red neon switch perimeter glow light: easy location of switching point
- No neutral connection required: can replace existing switch with no additional wiring
- Not Compatible With LED - See Eterna product above: **PUSHLED**
- Double insulated




Code	IP Rating	MOM / OPQ
TLS1440	IP20	5 / 40

## 16 AMP ELECTRONIC OUTDOOR TIME DELAY SWITCH

**1**  
Year Warranty  
IP66



- ABS construction • Double insulated
- Multiple accurate time settings using dip switches and rotary adjuster
- Incandescent 16 Amp max, fluorescent 6 Amp max, compact fluorescent 3 Amp max (maximum six fluorescent lights), low voltage 3 Amp max & fans and ventilation equipment 3 Amp max
- Multi point switching, connect two or more units in parallel
- Multi range delay function from 2 seconds to 2 hours: reduces energy consumption




Code	IP Rating	MOM / OPQ
TLS68EX	IP66	1 / 50

## PUSH TO BREAK AUTOSWITCH

**1**  
Year Warranty



- Momentary push switch: push to break contacts
- Thermoplastic construction
- Switching 1 Amp max (250V)
- Max. 25W LED load capacity
- Double insulated




Code	IP Rating	MOM / OPQ
XS63W	IP20	10 / 600

## ADD-ON PIR SENSOR FOR ETERNA LED BATTENS

**1**  
Year Warranty  
100° PIR



- Robust polycarbonate construction • Double insulated
- Time-on adjustable: 30 secs, 3 mins, 5 mins, 8 mins
- Night & day or night only options selectable
- Detection range 3-6 metres • 100° detection area
- See Eterna **BATLED** range



Code	IP Rating	MOM / OPQ
BATLEDPIR	IP20	1 / 6

# LIGHTING CONTROLS

## MICROWAVE SENSOR

1  
Year Warranty


IP65

Microwave  
Sensor




This sensor can either be wired directly into an existing fitting providing there is sufficient space to do so or alternatively it can be installed inside a separate unobtrusive enclosure, see Eterna part code MWCASE

- Polycarbonate construction • Double insulated
- Rated Load - 800W (resistive), 400W (inductive), 270W (LED)
- Adjustable detection angle: up to 150°
- Power consumption: <0.5W
- Adjustable detection range: Max. 6m
- Adjustable time setting: 5 seconds - 30 minutes
- Adjustable Lux control: 2-50 lux
- Push connect terminals: for ease of connection



### CASE:

- Polycarbonate construction
- Compact & discreet design: for housing Eterna part code SENSORMW
- IP65, ceiling or wall mounted: giving versatile fixing options, suitable for bathroom, internal and external use
- Supplied with two mounting screws to install SENSORMW and has 2 x 20mm gland entry holes: facilitating easy installation
- Screw fit cover to maintain IP rating, with clip on bezel: meaning enclosure cannot be tampered with easily



Code	Version	IP Rating	MOM / OPQ
SENSORMW	Sensor	-	1 / 150
MWCASE	Case	IP65	1 / 100


## REMOTE FIXING MINIATURE PHOTOCELL

1  
Year Warranty

Photocell



- Wired for remote fixing: ultra compact sensor head allows incorporation where space is extremely limited
- 1500VA / 5 Amp inductive load, Max 500W LED • Double insulated
- Thermoplastic construction • Switch on/off at 30/80 lux
- The cable gland fixing around the photocell can maintain up to IP65 dependant on the enclosure it is installed into



Code	Hole Cut Out Size	IP Rating	MOM / OPQ
EMPCR	20mm	IP20	1 / 5

## NEMA SOCKET ELECTRONIC PHOTOCELL KIT


1  
Year Warranty

Photocell

IP44



- Thermoplastic construction • Double insulated
- Electronic operation: improved accuracy over thermal types
- Supplied complete with mounting bracket and gasket
- 1500VA or 5 Amp inductive load at 60MFD • Max LED load: 1000W
- Switch on/off at 30/70 lux



Code	IP Rating	MOM / OPQ
NPCHKIT	IP44	1 / 5

## EXTERNAL PHOTOELECTRIC SWITCH


1  
Year Warranty

Photocell

IP44



- ABS construction • Double insulated
- Switching level adjustable between approx. 5-300 lux
- 10 Amp resistive, 3 Amp inductive load
- Run back timer adjustable to stay on between 1-8 hours after switch on: flexibility in operation for economic running costs
- Maximum 250W LED load capacity (no more than eight lights)



Code	IP Rating	MOM / OPQ
RDT10A	IP44	1 / 5

# ACCESSORIES & LAMPS

## ELECTRICAL ACCESSORY ESSENTIALS

Eterna provide all your basic lighting accessory essentials for most domestic premises. Our products are suitable for both refurb and new installations. Our products are all tested for safety and are manufactured to the highest standards to ensure safety and compliance with the latest regulations.




## WIRED SURFACE MOUNTED BELL PUSH & ILLUMINATED OPTION

**1**  
Year Warranty



**This product is designed for domestic installation up to 15m range**

- Polycarbonate construction • Concealed fixing holes
- Interchangeable black and white covers included: flexible solution - reduced stock requirements



Code	Version	IP Rating	MOM / OPQ
BPWB	Standard	IP20	10 / 400
BPLWB	Illuminated		

**FAQ**

Q) Can multiple bell pushes be wired together?

A) Yes, additional pushes must be connected in parallel

**FAQ**

Q) Can you use one push button to control two chimes?

A) No

**FAQ**

Q) Can this work on 240V

A) No, this needs connection via a transformer

**FAQ**

Q) What is the maximum length of wire between the push button and transformer?

A) Approx. 15 metres


## DOOR CHIME WITH BUILT-IN TRANSFORMER

**1**  
Year Warranty



**This product is designed for domestic installation up to 15m range**

- Integral transformer: neater, faster installation
- ABS construction • Modern design



Code	IP Rating	MOM / OPQ
TCWH	IP20	5 / 20

**FAQ**

Q) Can this be used to run a second bell chime?

A) No, this is a stand-alone unit

**FAQ**

Q) How loud is TCWH?

A) Approx. 80dB at one metre


## BATTERY / TRANSFORMER OPERATED CHIME

**1**  
Year Warranty



**This product is designed for domestic installation up to 15m range**

- ABS construction • Modern design
- Battery operation for non illuminated bell pushes
- Requires 4x 1.5V R14 'C' batteries (not included)
- Must be transformer operated for illuminated bell pushes (transformer not included - see BT4812)



Code	IP Rating	MOM / OPQ
DC1WH	IP20	5 / 20

**FAQ**

Q) How loud is DC1WH?

A) Approx. 60dB at one metre + the volume CANNOT be increased

**FAQ**

Q) Can you link two DC1WH units to the same transformer?

A) No

**FAQ**

Q) Can this be used with a lit bell push?

A) Yes, please use a transformer unit when using with an illuminated bell push, as the light will drain the batteries


## MULTI VOLTAGE BELL / CHIME TRANSFORMER

**1**  
Year Warranty



**This product is designed for domestic installation up to 15m range**

- Nylon construction • 1 Amp rated • Thermal cut out
- Double insulated: no earth connection required
- 4, 8 and 12V tapings: suits most bells and chimes



Code	IP Rating	MOM / OPQ
BT4812	IP20	5 / 60

**FAQ**

Q) What is the maximum length of bell wire that can be used to connect the transformer to the door chime?

A) Approx. 15 metres

**FAQ**

Q) Can multiple chimes / sounders be connected to BT4812?

A) No

**FAQ**

Q) How do you adjust the output voltage?

A) This has 4V, 8V, or 12V options as detailed in the install guide which can be downloaded from the website



## SINGLE FUSED A RATED RCD SPUR & TWIN UNSWITCHED A RATED RCD SOCKETS

**1**  
Year Warranty



- Type A rated to ensure tripping for residual a.c. currents and pulsating d.c. currents
- 13A fused spur with "passive" 30mA RCD protection at less than 40ms (typical)
- Complete with TEST button
- Mechanical latching (no need to reset after power loss)

### SSARCDWH

- Highly stable and reliable polycarbonate construction, with raised square profile and screwed faceplate


### TWSARCDMC

- Pressed steel construction with screwed faceplate
- Twin earth terminals for easy cable connections
- Easy cable-entry via knock-outs available on the surface mounting box (included)


### TWSARCDWH

- Highly stable and reliable polycarbonate construction, with raised square profile and screwed faceplate
- Twin earth terminals for easy cable connections


SSARCDWH



TWSARCDMC

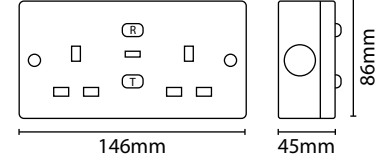

TWSARCDWH

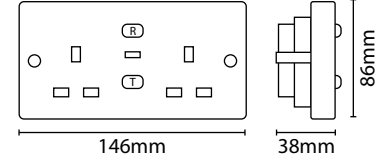


Code	Colour	Version	IP Rating	MOM / OPQ
SSARCDWH	White	Single Spur	IP20	5 / 60
TWSARCDMC	Grey Metalclad	Twin Socket		5 / 30
TWSARCDWH	White			5 / 40

## SINGLE FUSED RCD SPUR

**1**  
Year Warranty



- Trip speed less than 40mS (typical) • Earthed
- Twin earth terminals: easy cable connections
- Passive operation - mechanically latched (no need to reset after power loss)
- Urea construction • 13 Amp rated • 30mA trip current




Code	IP Rating	MOM / OPQ
SSRCDWH	IP20	5 / 60

## CONVERTER SOCKET 1 GANG TO 2 GANG

**1**  
Year Warranty



- Conversion of 1 gang to 2 gang socket: simple retrofit solution where extra outlets are required
- Tough polycarbonate construction: impact resistant
- Earthed




Code	IP Rating	MOM / OPQ
CONVERT2	IP20	5 / 100

## CONVERTER SOCKET 1 OR 2 GANG TO 4 GANG

**1**  
Year Warranty



- Conversion of 1 or 2 gang to 4 gang socket
- 13 Amp fused
- Tough polycarbonate construction
- Surge Protection • Earthed



Code	IP Rating	MOM / OPQ
CONVERT4	IP20	5 / 40

# ACCESSORIES & LAMPS


## WATERPROOF ACCESSORY BOXES

**1**  
Year Warranty

  
IP65



- Maintains IP integrity when cable in use: added safety while load is connected
- Lockable facility (security tag not included): for tamperproof installation
- Polycarbonate construction: tough, impact & corrosion resistant
- **SSBE** accepts standard 1 gang accessory & **TWSBE** accepts standard 2 gang accessory : flexible solution allowing a multitude of different uses



Code	Version	IP Rating	MOM / OPQ
SSBE	1 Gang	IP65	5 / 45
TWSBE	2 Gang		5 / 20

## PLASTIC ADAPTABLE WATERPROOF BOXES / ENCLOSURES

**1**  
Year Warranty

  
IP65 / IP54




- ABS construction
- Mounting plate available: allows easy fixing in the enclosure whilst maintaining IP rating
- Lockable door: added security (security tag not included)

### MOUNTING BACK PLATE:

- Designed for use with the waterproof enclosures: allows easy fixing in the enclosure whilst maintaining IP rating

Code	Version	Inside Measurements W/H/D	IP Rating	MOM / OPQ
JSL242	Small Enclosure	322 x 275 x 170mm	IP65	1 / 1
JSL244	Large Enclosure	422 x 380 x 170mm	IP55	
JSL242BP	JSL242 Backplate			1 / 25
JSL244BP	JSL244 Backplate			



## PLASTIC ADAPTABLE BOXES / ENCLOSURES

**1**  
Year Warranty

  
IP54 / IP65



- 397/5**
- Nylon with fibre glass construction • Large terminals: easy connections
  - 5 pole connector compatible with 220-L & 222-L

- All boxes - PP Copolymer construction

### 220-L


- Press on cover: rapid cover fixing
- Locating holes for 5 pole connector 397/5: easy connection facility

### 222-L



- ¾ turn twist lock screw down cover: rapid cover fixing
- Locating holes for 5 pole connector 397/5: easy connection facility

### 223-L / 224-L / 225-L

- ¾ turn twist lock screw down cover: rapid cover fixing

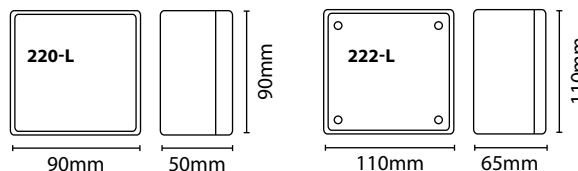

Code	Inside Measurements (Includes Space Inside The Lid)	IP Rating	MOM / OPQ
397/5	N/A	-	1 / 200
220-L	80x80x43mm	IP54	10 / 100
222-L	100x100x55mm	IP65	6 / 102
223-L	175x110x66mm		1 / 45
224-L	220x170x115mm		2 / 14
225-L	190x150x70mm		1 / 29

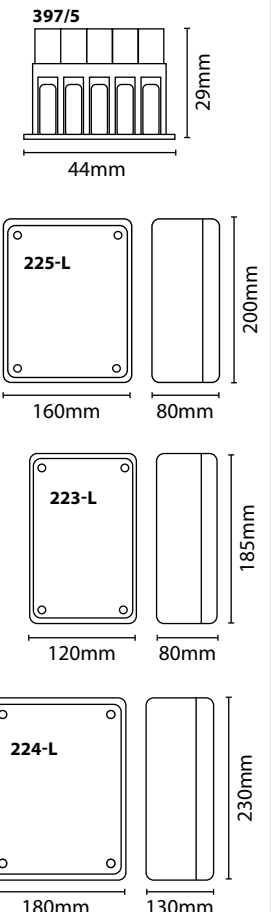


## TRS GLANDS WITH LOCKING NUT

1  
Year Warranty

IP68



- Glass filled nylon • Fire retardant to 850°C
- **20mm** accommodates 8-13mm cable
- **25mm** accommodates 12-18mm cable
- Supplied complete with lock nut




Code	Colour	Hole Ø	IP Rating	MOM / OPQ
20TRSBK	Black	20mm	IP68	100 / 1500
20TRSG	Grey			
20TRSWH	White			
25TRSG	Grey	25mm		20 / 800

## LIGHTING CONNECTOR BOXES

1  
Year Warranty



- Polypropylene case • Earthed
- Cord restraint at both entries
- **CB5A** = 5 Amp 3 way connector included
- **CB15A** = 15 Amp 3 way connector included

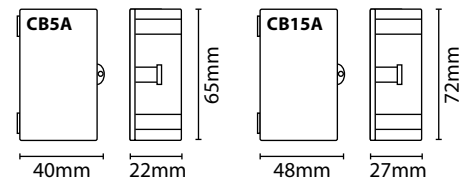

Code	Version	IP Rating	MOM / OPQ
CB5A	5 Amp	IP20	20 / 400
CB15A	15 Amp		


## IP68 WATERPROOF ELECTRICAL CONNECTOR

1  
Year Warranty


IP68



- Nylon construction • 3 Pole Connector
- 450V 32A rated • Cable size 0.5mm<sup>2</sup> - 4mm<sup>2</sup>



Code	IP Rating	MOM / OPQ
IPCONNECT	IP68	1 / 500

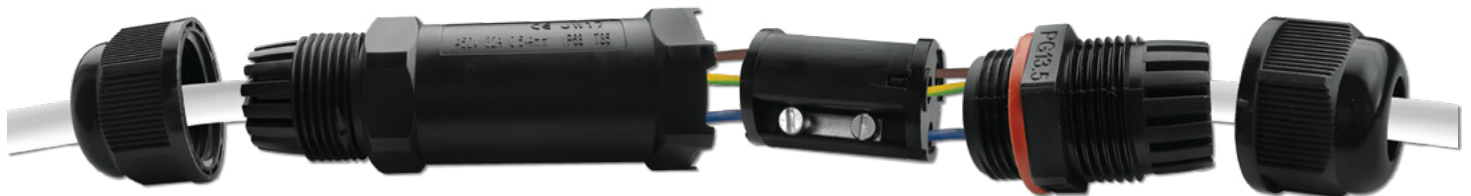


## PUSH TO BREAK AUTOSWITCH

1  
Year Warranty



- Momentary push switch: push to break contacts
- Thermoplastic construction
- Switching 1 Amp max (250V)
- Max. 25W LED load capacity • Double insulated



Code	IP Rating	MOM / OPQ
XS63W	IP20	10 / 600


## ACCESSORIES & LAMPS

### PLUG IN CEILING ROSE

**1**  
Year Warranty



- Urea construction • 6 Amp rating 4 terminal • BESA box mounting • Earthed
- Shrouded plug terminals and cord grip: complies with 2.2kg load test
- 4 terminals as standard offering extra live connection: ideal for emergency auxiliary use



#### CR10PW:

- Pre-wired with 2 metres of heat resistant 4 core flex: time saving, easy installation



Code	Version	IP Rating	MOM / OPQ
CR10	Un-wired	IP20	10 / 180
CR10PW	Pre-wired		10 / 60

### SPARE LAMPHOLDERS

**1**  
Year Warranty



- **AWFO8:** Silicon braided cable: heat resistant




Code	Colour	Version	IP Rating	MOM / OPQ
GU10LH	Black	GU10	IP20	5 / 200
AWFO8	White	GU5.3 LV		10 / 250

### G5 T4 FLUORESCENT TUBES FOR ETERNA TUS RANGE

**1**  
Year Warranty



- Glass construction • Not dimmable
- Specifically designed for use with Eterna brand fittings



Code	Length	Wattage	Colour Temp.	Lumens	Avg. Rated Life (Hrs)	MOM / OPQ
N64/3	341mm	10W	3400K	630 lm	10,000 hrs	10 / 200
N64/5	468mm	16W		1090 lm		10 / 100


### DD CFLNI LAMPS

**1**  
Year Warranty




Standard size energy efficient compact fluorescent lamp used in many commercial & decorative luminaires

- Glass construction
- Not dimmable



Code	Wattage	Cap Type	Colour Temp.	Lumens	Avg. Rated Life (Hrs)	MOM / OPQ
DD28435	28W	GR10q 4 Pin	3500K	2050 lm	10,000 hrs	10 / 10

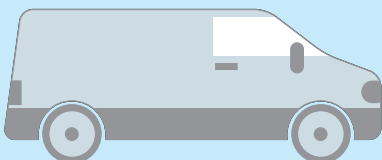















We always have high levels of stock availability and most stock is available for next day delivery

For more information on collection or delivery, please see our website






LAMPS		
	ALED800ES	ES   LED   A Shape   9W   800 lm   2700K   15,000 hrs
	D1040EB	10W   4000K   G24D-1 2 Pin   Double Turn CFL   600 lm   10,000 hrs
	D1840EB	18W   4000K   G24D-1 2 Pin   Double Turn CFL   1210 lm   10,000 hrs
	D2640EB	26W   4000K   G24D-1 2 Pin   Double Turn CFL   1720 lm   10,000 hrs
	DD28435	DD   GR10q 4 Pin   28W   3500K   2050 lm   10,000 hrs
	DE1040EB	10W   4000K   G24Q-1 4 Pin   Double Turn D-E CFL   600 lm   10,000 hrs
	DE1840EB	18W   4000K   G24Q-2 4 Pin   Double Turn D-E CFL   1210 lm   10,000 hrs
	LE2440EB	24W   4000K   2G114 Pin   Single Turn L CFL   1800 lm   10,000 hrs
	LE4040EB	40W   4000K   2G114 Pin   Single Turn L CFL   3320 lm   10,000 hrs
	LE5540EB	55W   4000K   2G114 Pin   Single Turn L CFL   4510 lm   10,000 hrs
	LEDGX4	4W   LED   Retrofit   GX53   3000K   250 lm   30,000 hrs   120°
	S1135EB	11W   3500K   G23 2 Pin   Single Turn S CFL   900 lm   10,000 hrs
	S735EB	7W   3500K   G23 2 Pin   Single Turn S CFL   405 lm   10,000 hrs
	T1835	18W   T8   Triphosphor Fluorescent Tube G13   3500K   1350 lm   15,000 hrs
	T3635	36W   T8   Triphosphor Fluorescent Tube G13   3500K   3350 lm   15,000 hrs
	T5835	58W   T8   Triphosphor Fluorescent Tube G13   3500K   5250 lm   15,000 hrs
	T52835T	28W   T5   Triphosphor Fluorescent Tube G5   3500K   2585 lm   20,000 hrs
	TE1340EB	13W   4000K   GX24Q-1 4 Pin   Triple Turn T/E CFL   810 lm   10,000 hrs
	TE1840EB	18W   4000K   GX24Q-1 4 Pin   Triple Turn T/E CFL   1210 lm   10,000 hrs
CEILING/WALL		
	CFLEDCEM3	Chrome   LED   EM3   18.5W   3100K   1200 lm   40,000 hrs   IP65
	CO12SCPC	White   LED   photocell   12W   4200K   1200 lm   35,000 hrs   IP65

	CO18PC	White   LED   Photocell   18W   Colour Temp Selectable   35,000 hrs   IP65
	MWSLIMLCR	Chrome   LED   MW   Slim 80mm Depth   14W   4200K   1100 lm   35,000 hrs   IP65
	OF16OP	16W   Opal Diffuser   DD Lamp Incl   3500K   1100 lm   10,000 hrs   IP65
	SDCFLEDCR	Chrome   LED   Step Dim MW   18.5W   3100K   1200 lm   40,000 hrs   IP65
	SDCFLEDWH	White   LED   Step Dim MW   18.5W   3100K   1200 lm   40,000 hrs   IP65
	T8LED20	Silver   LED Batten   20W   4000K   1600 lm   20,000 hrs   1200mm / 4ft
	CPRIS	Prismatic Diffuser for CO18, CO12 Ranges
DOWNLIGHTS		
	COMDL15	White   LED Recessed Downlight   15W   4000K   1705 lm   30,000 hrs   IP20
	COMDL25	White   LED Recessed Downlight   25W   4000K   2400 lm   30,000 hrs   IP20
	COMDL40	White   LED Recessed Downlight   40W   4000K   3500 lm   30,000 hrs   IP20
	COMRCS25	White   LED Recessed Downlight   25W   Col. Temp. Selectable   45,000 hrs   IP54
	VECOIFIRE4	3 x Col Trims Incl   Fire Rated Downlight   LED   5W   4000K   36,000 hrs   IP65
	VECORDL12	White   LED   Recessed Downlight   12W   4000K   1200 lm   25,000 hrs
	VECORDL24	White   LED   Recessed Downlight   24W   4000K   2400 lm   25,000 hrs
	VECORDL6	White   LED   Recessed Downlight   6W   4000K   480 lm   25,000 hrs
FLOODLIGHTS & LANTERNS		
	ELEDFLD30	Black   30W   4000K   2200 lm   30,000 hrs   IP65
	FL124B	Black   ES CFLi   Lamp Incl   23W   6400K   1371 lm   10,000 hrs   IP44
	FLD10BK	Black   LED   10W   4000K   800 lm   25,000 hrs   IP65
	FLD10PIRBK	Black   LED   10W   4000K   800 lm   25,000 hrs   IP44   120° PIR
	FLD10PIRWH	White   LED   10W   4000K   800 lm   25,000 hrs   IP44   120° PIR
	FLD10WH	White   LED   10W   4000K   800 lm   25,000 hrs   IP65

# DISCONTINUED LINES - CALL OURS SALES TEAM FOR DISCOUNTED PRICES

	FLD20BK	Black   LED   20W   4000K   1600 lm   25,000 hrs   IP65
	FLD20PIRBK	Black   LED   20W   4000K   1600 lm   25,000 hrs   IP44   120° PIR
	FLD20PIRWH	White   LED   20W   4000K   1600 lm   25,000 hrs   IP44   120° PIR
	FLD20WH	White   LED   20W   4000K   1600 lm   25,000 hrs   IP65
	FLD30BK	Black   LED   30W   4000K   2400 lm   25,000 hrs   IP65
	FLD30PIRBK	Black   LED   30W   4000K   2400 lm   25,000 hrs   IP44   120° PIR
	FLD30PIRWH	White   LED   30W   4000K   2400 lm   25,000 hrs   IP44   120° PIR
	FLD30WH	White   LED   30W   4000K   2400 lm   25,000 hrs   IP65
	FLD50BK	Black   LED   50W   4000K   4000 lm   25,000 hrs   IP65
	FLD50PIRWH	White   LED   50W   4000K   4000 lm   25,000 hrs   IP44   120° PIR
	FLD50WH	White   LED   50W   4000K   4000 lm   25,000 hrs   IP65
	MODERNOBK	Black   LED   6W   3100K   330 lm   35,000 hrs   IP44   Lantern
	MODERNOWH	White   LED   6W   3100K   330 lm   35,000 hrs   IP44   Lantern
	MODPIRWH	White   LED   6W   3100K   330 lm   35,000 hrs   IP44   Lantern   120° PIR
	POLY10	Black   LED   10W   4000K   800 lm   25,000 hrs   IP44   Floodlight
	POLY20	Black   LED   20W   4000K   2000 lm   25,000 hrs   IP44   Floodlight
	POLY20PIR	Black   LED   20W   4000K   2000 lm   25,000 hrs   IP44   Floodlight   120° PIR
	POLY30	Black   LED   30W   4000K   3000 lm   25,000 hrs   IP44   Floodlight
	TAB10BK	Black   LED   10W   4000K   750 lm   30,000 hrs   IP65   Floodlight
	TAB10WH	White   LED   10W   4000K   750 lm   30,000 hrs   IP65   Floodlight
	TAB20BK	Black   LED   20W   4000K   1500 lm   30,000 hrs   IP65   Floodlight
	TAB20WH	White   LED   20W   4000K   1500 lm   30,000 hrs   IP65   Floodlight

	VECOF10PIR	Black   LED   10W   4000K   850 lm   25,000 hrs   IP44   Floodlight   120° PIR
	VECOF20PIR	Black   LED   20W   4000K   1700 lm   25,000 hrs   IP44   Floodlight   120° PIR
	VECOF50PIR	Black   LED   50W   4000K   4250 lm   25,000 hrs   IP44   Floodlight   120° PIR
	VECOFLD10	Black   LED   10W   4000K   850 lm   25,000 hrs   IP44   Floodlight
	VECOFLD50	Black   LED   50W   4000K   4250 lm   25,000 hrs   IP44   Floodlight

## SPOTLIGHTS

	SPOT2CR	Chrome   Twin Bar   2x 50W Max GU10
	SPOT2SN	Nickel   Twin Bar   2x 50W Max GU10
	SPOT2WH	White   Twin Bar   2x 50W Max GU10
	SPOTLEDWAL	Nickel   LED   4.3W   4000K   240 lm   30,000 hrs   IP44   Wall Spotlight

## WEATHERPROOFS

	VECO5WPSI2	Grey   5ft Single   LED   30W   4000K   2900 lm   40,000 hrs   IP65
	VECO5WPTW2	Grey   5ft Twin   LED   45W   4000K   4300 lm   40,000 hrs   IP65
	VECO6WPSI2	Grey   6ft Single   LED   48W   4000K   4500 lm   40,000 hrs   IP65
	VECO6WPSIN	Grey   6ft Single   LED   48W   4000K   4500 lm   40,000 hrs   IP65
	VECO6WPTW2	Grey   6ft Twin   LED   65W   4000K   6200 lm   40,000 hrs   IP65
	WP51SDEM3	Grey   LED   5ft Single   Step Dim   EM3   30W   5000K   3000 lm   30,000 hrs   IP65
	WP61SDEM3	Grey   LED   6ft Single   Step Dim   EM3   40W   5000K   4000 lm   30,000 hrs   IP65
	WPLED51SD	Grey   LED   5ft Single   Step Dim   30W   5000K   3000 lm   30,000 hrs   IP65
	WPLED61SD	Grey   LED   6ft Single   Step Dim   40W   5000K   4000 lm   30,000 hrs   IP65

All items available at clearance prices whilst stocks last



# IRELAND TERMS & CONDITIONS

## SCOPE

These terms and conditions apply to all offers made by O'Neills Electrical Ltd trading as Eterna Lighting Ireland (hereinafter called the Company) and to all contracts of sale made by the Company for its products. These terms and conditions shall not be modified unless with the prior written approval of a director of the Company. These terms and conditions shall prevail over any and all of the buyer's general and specific terms and conditions of purchase for the products and shall supersede all previous communications with the buyer either oral or written.

## COMING INTO EFFECT

The contract between the Company and the buyer shall come into effect when the buyer's order is accepted by the Company.

## STATUTORY RIGHTS

The provisions of these general conditions of sale shall not prejudice any rights which may, notwithstanding these conditions of sale, be guaranteed to the customer by virtue of sections 12, 13, 14 and 15 of the sale of goods act 1893, as amended by the sale of goods and supply of services act 1980, save to such extent as may be lawful from time to time in relation to any particular sale.

## ORDERS

Orders will be made up to the nearest full pack quantity. Written confirmation of telephoned orders should be clearly marked as such, otherwise we cannot be held responsible should the order be duplicated. The right is reserved to refuse cancellation of any order placed or to suspend delivery of any order from time to time if any account is in arrears.

## PRICES

Unless otherwise agreed in writing all orders are executed subject to prices and any relevant discounts ruling at the date of delivery and any other price list of the Company whether published or not shall apply. All prices are subject to Value Added Tax or any similar tax on duty of goods. Attention is drawn to the fact that listed prices and conditions are subject to alteration without prior notice.

## QUOTATIONS

All quotations relating to price or discount and whether given verbally or in writing are valid for thirty days only. Quotations must in all cases, be authorised by a director of the Company.

## MINIMUM ORDER VALUE

The Company reserves the right to levy a small order surcharge on all orders below €150/£150 nett trade. This charge will be in addition to any carriage charges.

## DELIVERY

The Company will endeavour to execute orders as soon as possible but delivery dates either quoted or agreed are not of the essence of the contract, nor can the Company guarantee them. The Company are not responsible for any loss expense or damage sustained by the buyer of any sort caused by any delay in delivery. The buyer must accept delivery of the goods when offered by the Company at the site specified in the despatch invoice. Any additional costs or charges arising from delivery to any other site requested by the buyer shall be paid for by the buyer. Upon delivery of the goods to the site the buyer shall be deemed to be fully responsible for them and will immediately affect proper and adequate insurance. In the event of any loss or damage to the goods however arising before the buyer has paid the full price thereof the buyer shall compensate the Company for such loss and/or damage.

## INSPECTION OF GOODS DELIVERED

The buyer is responsible for checking that goods of the correct specification and/or description are delivered and while the Company will replace any incorrect goods delivered provided they are notified thereof within a reasonable period the Company are not liable for loss or damage howsoever caused arising from the use of such goods even if their delivery arising from negligence of the Company, their servants or agents.

## DAMAGE OR LOSS IN TRANSIT

In the event of damage or shortage, written or faxed notification must be sent to the Company within two working days as well as making a notation to that effect on the signed delivery note. In the event of non-delivery the Company must be notified in writing within seven days of the despatch date shown on the relevant invoice. In the event of failure to give notice within the aforementioned

periods the goods will be deemed to be in all respects as invoiced.

## CARRIAGE

Unless otherwise specified the price excludes delivery charges from the Company's warehouse to the buyers premises. The Company reserves the right to choose the method of transport and may impose a carriage charge in exceptional circumstances. Requests for rail, courier or postal delivery will be at the buyers cost. When special items are ordered and the manufacturer charges carriage and/or packing, the Company reserves the right to pass these charges on at cost.

## CREDITS – TIME LIMITATION

Under no circumstances will the Company consider claims for credit – of whatever nature- after the expiry of six months from the date of sale with the exception of products where specific periods of guarantee apply.

## RETURNS

The Company will not accept for credit goods correctly supplied in accordance with order, without written approval. If consent is given, this will be subject to (a) a handling charge being imposed (b) returned goods must be sent carriage free (c) reference made to the original invoice on which the goods were supplied (d) a clear signature must be obtained from the Company confirming receipt of goods and (e) the Company will not replace goods claimed to be defective until it is confirmed the fault is not the result of improper use or installation.

## SAMPLES

Any samples submitted with the Company's quotation or at the buyer's request must be returned within thirty days of receipt and may be charged if not so returned.

## PAYMENTS

(a) Until such time as the Company has confirmed credit account facilities in writing, payment shall be due in full on or before delivery, and the Company may withhold delivery accordingly.

(b) A settlement discount of 2.5% is allowed for payment made by the last day of the month following delivery except on Value Added Tax or on such items marked on the Company's quotation, acceptance of order, or invoice as being 'Strictly Nett'

(c) The Company shall be entitled to charge interest on overdue accounts of 2.5% per month and to suspend deliveries without notice of any of the buyers orders or to cancel such orders if the buyer does on three or more occasions fail to pay due accounts without any reason of withholding payment or if the buyer being a Company has a receiver appointed or goes into liquidation or being an individual commits to an act of bankruptcy or has a receiving order made against him.

(d) Where the contract provides for separate instalments, deliveries or parts, payment for each instalment, delivery or part shall be made as if the same constituted a separate contract.

(e) No account shall exceed sixty days credit.

(f) Overdue accounts and those not qualifying for settlement discount are strictly nett.

(g) Receipts are not issued against payments by cheque unless specifically requested.

(h) The Company reserves the right to suspend supplies on a temporary or permanent basis and the discretion to determine any contract if the buyer is found to be in breach of its payment terms.

(i) The Company reserves the right at any time in its absolute discretion to revoke or vary any credit extended to the customer including the credit period referred to above.

## TITLE

(a) The property in such goods supplied by the Company subject to these terms and conditions shall remain in the Company and shall not pass to the buyer until all monies inclusive of delivery and other charges due or owing to the Company by the buyer in consideration of such goods, have been paid and all other obligations due by the buyer have been performed notwithstanding that the goods have been delivered to the buyer.

(b) The buyer is entitled to sell the goods to third parties in the ordinary course of business on the condition that if the Company so requires the buyer so long as he has not fully discharged his debt to the Company shall deal separately as trustee for the Company with the proceeds of such sale and shall account to the Company for such monies as directed by it from time to time.

(c) It is a condition that goods supplied by the Company are sold to third parties on a first in first out basis and that

stocks of the Company's products held at any time by the buyer relate to the most recent invoices so that all stocks of the Company's products held are identified and are related to specific invoices.

(d) The buyer hereby empowers and authorises the Company to demand and receive payment from third parties for any of the Company's goods sold to such third parties whilst the buyer is in default of payment to the Company, which power will not be exercised by the Company without written notice to the buyer.

(e) Should the goods (or any of them) be converted into a new product, whether or not such conversion involves the admixture of any other goods or thing whatsoever and in whatever proportions, the conversion shall be deemed to have been effected on the Company's behalf and the Company shall have full legal and beneficial ownership of the new product.

(f) If any amount owing by the buyer to the Company is overdue, the Company may, without prejudice to any of its other rights or remedies, repossess and resell any or all such goods and may enter upon the buyer's premises for that purpose.

(g) The buyer shall not be entitled to pledge or create any lien or charge over the goods but, subject as aforesaid, may deal with the goods in the ordinary course of trade.

(h) The clauses herein relating to retention of title shall not be construed as to constitute an agency between the Company and the buyer in any circumstances.

(i) The clauses herein relating to retention of title do not entitle the buyer to return goods and refuse or delay payment on the grounds that the property in such goods has not passed to the buyer.

(j) If the reservation of ownership in the foregoing clauses is not effective for any reason whatsoever, the purchaser hereby undertakes to co-operate with the Company in establishing a similar security in favour of the Company.

## WARRANTY AND EXCLUSION

The Company will use all reasonable endeavour to assign the benefit of any warranty it receives from its supplier to the Purchaser but shall not be liable for any claim or claims for any damages whether direct, indirect special or consequential or economic damage or loss (including loss of profit or goodwill) arising from any breach by its contract or any defect in the goods. In certain circumstances and for certain product ranges, the Company may offer a specific warranty against defects arising from faulty design or materials, for a defined period. Any warranty period offered will be deemed to have commenced on the date the goods have been delivered to the Purchaser. The Company will not be liable for any warranty or guarantee where the Purchaser has not paid for the goods in full by the due date. Nothing in these conditions shall exclude liability of the Company for death or personal injury resulting from its negligence insofar as the same is prohibited by Irish statute.

## DESCRIPTIVE MATTER AND ILLUSTRATION

All descriptive and forwarding specifications, drawings and particulars of weights and dimensions issued by the Company are approximate only, and are intended only to present a general indication of appearance of the goods to which they refer and shall not form part of the contract. The Company reserve the right to alter or vary with or without notice.

## COPYRIGHT

All drawings, descriptions and other information submitted by the Company shall remain the property of the Company together, with the copyright therein.

## DESIGN IMPROVEMENT

As the Company constantly looks to improving and modernising products, the Company reserves the right to supply goods incorporating modifications in the design, when these are deemed by the Company to be an improvement.

## FORCE MAJEURE

Every effort will be made to carry out the contract but its due performance is subject to cancellation by the Company or to such variation as it may find necessary as a result of inability to secure labour materials or supplies as a result of any act of god, war, strike, lockout or other labour dispute, fire, flood, drought, legislation or other (whether of the foregoing class or not) beyond its control.

## LEGAL CONSTRUCTION

The terms of any contract to which these conditions of sale relate shall, in all respects be constructed and operate in accordance with the laws of the Republic of Ireland and be within the exclusive jurisdiction of the Irish courts.



# INDEX

#	C	D	G	#
1200P4K 31	CB15A 78	DC1WH 75	GDL50SS 61	KEM3ML 7
20TRSBK 78	CB5A 78	DD28435 79	GRILLBK 21	KEXIT3MLI 8
20TRSG 78	CFLEDMINSC 19	DECKLED 61	GRILLWH 21	KFIRE4CR 50
20TRSWH 78	CFLEDWHSC 19	DFH2KW 68	GU10LH 79	KFIRE4SN 50
220-L 77	CFLWHEM3SC 20	DFHT2KW 68		KFIRE4WH 50
222-L 77	CHA18EM3 20		<b>H</b>	KFLATDL12 49
223-L 77	CHA18MW 18	<b>E</b>	HBAYLIN 45	KFLATDL18 49
224-L 77	CHA18MW3 18	EB1 - EB25 14	HBCIR150PP 46	KFLATDL24 49
225-L 77	CHA18SD 18	EBLGDL 8	HBCIRDIF90 46	KFLD10 42
397/5 77	CHA18SDEM3 18	EBLGDR 8	HDA-1800 67	KFLD20 42
600P4K 31	CHA18STD 18	EBLGDU 8	HL60B 65	KFLD30 42
600P4KTPU 31	CHAEYEBK 18	EBLSLIMM 9	HL60WH 65	KFLD50 42
600P5K 31	CHAEYEGY 18	EBPM3 9		KFLDPIR 42
	CHAEYEW 18	EBPM3LI 9	<b>I</b>	KNANOIP2FT 36
<b>A</b>	CHAFULLBK 18	ELEGAN5EM3 36	IPCONNECT 78	KNANOIP4FT 36
ALEM3WHGRI 23	CHAFULLCR 18	ELEGANCE5 36	ISOBLGDD 8	KNANOIP5FT 36
ALMF3BKGR 23	CIRCBK 21	ELESUSPACK 36	ISOBLGDL 8	KRECBOP 25
ALMF3WHEYE 23	CIRCCR 21	EML3MISO 6	ISOBLGDR 8	KRECBOP LPC 25
ALMF3WHGRI 23	CIRCWH 21	EML3NMISO 6	ISOBLGDU 8	KTWINSPLI 10
ALMFBKGR 23	CIROPALSTD 17	EMLED3M 6	ISOLGDSET 6	KWPEM3SIN5 39
ALMFWHEYE 23	CLEDCIR 58	EMLED3NM 6	ISOMMOD 12	KWPEM3SIN6 39
ALMFWHFUL 23	CLEDCIRWH 58	EMMOD 12	ISOMMOLR 12	KWPEM3TWI5 39
ALMFWHGRI 23	CLEDTRI 58	EMMOLR 12	ISOSIGND 13	KWPEM3TWI6 39
ALSTDBKGR 23	CO12 21	EMMOUP 12	ISOSIGNLR 13	KWPSIN5 39
ALSTDWHEYE	CO12EM3 21	EMPCR 73		KWPSIN6 39
ALSTDWHGRI 23	CO12MW 21	EX360PIRWH 71	<b>J</b>	KWPTWI5 39
ALULANT 65	CO12MW3 21	EXIT3MLE 8	JSL242 77	KWPTWI6 39
ALULANTPIR 65	CO12PC 21	EXITMMO 12	JSL242BP 77	
ATOM5 25	CO12SCPC 21	EXITREC 12	JSL244 77	<b>L</b>
AWFO8 79	CO18 21	EYEBK 21	JSL244BP 77	L60B 65
	CO18EM3 21	EYEW 21		LBB120 45
<b>B</b>	CO18MW 21		<b>K</b>	LBB3050 45
B1100BKNL 60	CO18MW3 21	<b>F</b>	KBAT4 35	LBB80 45
BATL4FTEM3 34	CO18PC 21	FIRELEDPCS 50	KBAT5 35	LDLEM3 11
BATL5FTEM3 34	COMDL15 49	FIRETRCR 50	KBAT6 35	LDLEM3LI 11
BATL5HOEM3 34	COMDL25 49	FIRETRSN 50	KBLPAN 32	LEDL BAY120 45
BATL6FTEM3 34	COMDL40 49	FIRETRWH 50	KCAS14BKFL 22	LEDL BAY30 45
BATL6HOEM3 34	COMRCS25 48	FLD10BK 41	KCAS14BKLV 22	LEDL BAY50 45
BATLED4FT 34	CONVERT2 76	FLD10PIRBK 41	KCAS14WHFL 22	LEDL BAY80 45
BATLED5FT 34	CONVERT4 76	FLD10PIRWH 41	KCAS14WHLV 22	LEDMIRROR 54
BATLED5HO 34	CONVHTSTD 69	FLD10WH 41	KCAS8BKFL 22	LEDOM5CR 53
BATLED6FT 34	CONVHTTIM 69	FLD20BK 41	KCAS8WHFL 22	LEDOM5WH 53
BATLED6HO 34	CPRIS 21	FLD20PIRBK 41	KCIREM3 22	LED SH44 53
BATLEDPIR 34	CR10 79	FLD20PIRWH 41	KCIREYEBK 22	LED SH6CR 54
BFRAME 6	CR10PW 79	FLD20WH 41	KCIREYEGY 22	LED SH6WH 54
BH100E27 25	CR80CR 51	FLD30BK 41	KCIREYEW 22	LED SHDVO 53
BLEDBK 25	CR80SN 51	FLD30PIRBK 41	KCIRFULLBK 22	LEDTWN SPOT 10
BLEDPIRBK 25	CR80WH 51	FLD30PIRWH 41	KCIRFULLCR 22	LG DSET 7
BPLWB 75	CSLED CR 20	FLD30WH 41	KCIRMW 22	
BPWB 75	CSLED CREM3 20	FLD50BK 41	KCIRMW3 22	<b>M</b>
BRICKLED 61	CSLEDWH 20	FLD50PIRWH 41	KCIRSTD 22	MINIEYEBK 22
BT4812 75	CSLEDWHEM3 20	FLD50WH 41	KCOMCS13 48	MINIFULLWH 22
BULKFRAME 6	CW3021 27	FLOOD120W 43	KCOMCS18 48	ML5040 54
BULKLED 24		FLOOD200W 43	KCOMCS8 48	MSCSL CREM3 20
BULKLEDPC 24		FLOOD50W 43	KEM3BULKLI 7	MSCSLED CR 20
		FLOOD80W 43	KEM3LIDL 11	MSCSLEDWH 20
				MSCSLWHEM3 20

# INDEX

MSLEDMINSC	19	<b>S</b>		SSBE	77	VECOLT514	58
MSLEDWHSC	20	SA360PIR	71	SSHDA-2500	67	VECOLT54	58
MSLWHEM3SC	20	SDCSLCREM3	20	SSARCDWH	76	VECOLT58	58
MWCASE	73	SDCSLEDCR	20	SSRCDWH	76	VECOMEM3	7
<b>N</b>		SDCSLEDWH	20	SSWLDIR	62	VECOMEM3L	7
N64/3	57	SDCSLWHEM3	20	SSWLSING	62	VECOPANBL	32
N64/5	57	SEEBPM3	9	SSWLTWIN	62	VECORCFL10	42
NL1WH	57	SELB4FTEM3	35	SURFACEMK	31	VECORCFL20	42
NPCHKIT	73	SELB5HOEM3	35	<b>T</b>		VECORDL12	48
<b>O</b>		SELB6FTEM3	35	T8LED20	36	VECORDL24	48
OILHT157	69	SELB6HOEM3	35	TCWH	75	VECORDL6	48
OILHT211	69	SELDLEM3	11	TH1	67	VECOTWINSP	10
OILHT211T	69	SEMEM3	6	TH2	67	VECOWLG	60
OMLED10	54	SENSORMW	73	TH3	67	VECOWLPIRG	60
OPCIREM3	16	SESIGNLEM3	13	TH4	67	VECOWLPIRW	60
OPCIRMW	16	SESMDCL	11	TLS1440	72	VECOWLW	60
OPCIRMW3	16	SESMDLEM3	11	TLS68EX	72	VECOWP5FT	38
OPCIRSTD	16	SFLDR36	57	TRG1FT	67	<b>W</b>	
OPSQEM3	16	SFLWW15	57	TRG2FT	67	WELLBKPIR	60
OPSQMW	16	SFLWW9	57	TRG3FT	67	WELLBKSTD	60
OPSQMW3	16	SH1844DVO	53	TRG4FT	67	WELLDIFF	60
OPSQSTD	16	SH3WH	68	TSPOTLIP20	10	WELLWHPIR	60
<b>P</b>		SHEYEBK	22	TUS20NL	57	WELLWHSTD	60
PACIFIC12	23	SHEYEMWBK	22	TUS6NL	57	WGLEDBK	60
PANSUSKIT	31	SHEYEWH	22	TWSBE	77	WGLEDWH	60
PFH2400	68	SHFULLBK	22	TWSARCDMC	76	WP42	38
PIR110BK	71	SHFULLMWBK	22	TWSARCDWH	76	WP42MW	38
PIR180BK	71	SHFULLMWWH	22	<b>V</b>		WP52	38
PIR180WH	71	SHFULLWH	22	VECO5WPSI2	39	WP52EM3	38
PIR80BK	24	SIGNLEDEM3	13	VECO5WPTW2	39	WP61	38
PIRFM360	71	SIGNLGD	13	VECO6WPSI2	39	WP61EM3	38
PIRHL60BK	65	SIGNLGDUP	13	VECO6WPTW2	39	WP61MW	38
PIRHL60WH	65	SLGUOCR	55	VECOBAT4FT	35	WP62	38
PIRL60BK	65	SLGUSN	55	VECOBAT5FT	35	WP62MW	38
PRCIREM3	16	SLGUWH	55	VECOBAT5HO	35	WPACKLED	24
PRCIRMW	16	SLICELONG	61	VECOBAT6FT	35	WPACKLEDPC	24
PRCIRMW3	16	SPOT1CR	63	VECOBAT6HO	35	WPCSBK	24
PRCIRSTD	16	SPOT1SN	63	VECOABPTR	58	WPCSBKPC	24
PRSQEM3	16	SPOT1WH	63	VECOEMISOL	7	WPCSWH	24
PRSQMW	16	SPOT2CR	63	VECOEXIT3M	8	WPCSWHPC	24
PRSQMW3	16	SPOT2SN	63	VECOF10PIR	41	<b>X</b>	
PRSQSTD	16	SPOT2WH	63	VECOF20PIR	41	XS63W	72
PUSHLED	72	SPOT3CRBAR	63	VECOF50PIR	41		
<b>R</b>		SPOT3CRPL	63	VECOFBK	65		
RDT10A	73	SPOT3SNBAR	63	VECOFLD10	41		
		SPOT3SNPL	63	VECOFLD50	41		
		SPOT3WHBAR	63	VECOFPIRBK	65		
		SPOT3WHPL	63	VECOHBK	65		
		SPOT4CR	63	VECOHPIRBK	65		
		SPOT4SN	63	VECOIBRACK	50		
		SPOT4WH	63	VECOIFIRE3	50		
		SPOTLEDGAR	68	VECOISOD	8		
		SPOTLEDWAL	68	VECOISOL	8		
		SQOPALMW	17	VECOISOR	8		
		SQOPALMW3	17	VECOLT510	58		
		SQOPALSTD	17				
		SQPRISMW	17				

Everyday Lighting For Professionals



T: +353 1 844 6300  
E: [sales@eterna-lighting.ie](mailto:sales@eterna-lighting.ie)  
E: [technical@eterna-lighting.ie](mailto:technical@eterna-lighting.ie)  
W: [www.eterna-lighting.ie](http://www.eterna-lighting.ie)

O'Neills Electrical Ltd trading as Eterna Lighting Ireland  
Co. Reg. No. IE 018423 | WEEE Reg. No. 00093WB | VAT Reg. No. IE 8R73602D  
Unit B4D | Airport Business Park | Cloghran | Co. Dublin | K67 X7H9

