

 **Eterna**[®]
Everyday Lighting For Professionals

IRELAND

THE CATALOGUE



Everyday Lighting For Professionals



Eterna[®]

Everyday Lighting For Professionals

IRELAND

O'Neills Electrical Limited trading as Eterna Lighting Ireland

Along with other efficiencies and continued service improvements, our team here in Dublin are ever more able to support you and your customers with your LED lighting needs.

**Distributed
throughout Ireland
& Northern Ireland
by Eterna Lighting
Ireland**

SALES:

T: +353 1 844 6300

E: sales@eterna-lighting.ie

W: www.eterna-lighting.ie



Eterna[®]

Everyday Lighting For Professionals

IRELAND

**Next Day
Delivery**



**NEXT DAY
DELIVERIES**



**DIRECT
TO SITE
DELIVERIES**



**MULTI £/€M
STOCK
AVAILABILITY**

Who Are..... Eterna?

- ✓ 85+ years supplying the lighting industry
- ✓ Family owned financially robust business
- ✓ Wide portfolio of products for commercial, domestic & industrial markets
- ✓ Quality assurance from ISO9001 : 2015, partner relationships and AQL testing
- ✓ Customer focussed LED warranty policy
- ✓ Accredited member of LIA

Our Offer

- ✓ Supporting customers on UK mainland from Wellingborough and Ireland
- ✓ Next day delivery and direct to site options (conditions apply)
- ✓ Significant stocks in both UK and Dublin
- ✓ Experienced and helpful sales & customer service teams
- ✓ Expertise & advice from the technical team
- ✓ Specification sheets & IES files available for download
- ✓ Continual flow of new products
- ✓ Innovative marketing materials
- ✓ Network of supporting distributors

■ Emergency Lighting	04-20
■ Ceiling/Wall/Bulkheads	21-35
■ Panels	36-38
■ Battens - Interior	39-42
■ Battens - Weatherproof	43-45
■ Floodlighting	46-49
■ High & Low Bay	50-52
■ Downlights	53-57
■ Bathroom Lighting	58-61
■ Cabinet Lighting	62-64
■ Garden Lighting & Spotlighting	65-69
■ Lanterns	70-71
■ Hand Dryers & Heating	72-75
■ Lighting Controls	76-79
■ Accessories & Lamps	80-85
■ Discontinued Lines	86-87
■ Horstmann	88
■ Terms & Conditions	89
■ Index	90-91

EMERGENCY LIGHTING



OR



WHAT IS THE DIFFERENCE BETWEEN MAINTAINED & NON MAINTAINED?

MAINTAINED

ILLUMINATED ALL THE TIME & IN EMERGENCY MODE STAYS ILLUMINATED BUT AT A LOWER LIGHT LEVEL

Luminaire is continuously illuminated and switches on to emergency battery operation in the event of a mains failure.

NON-MAINTAINED

ILLUMINATES ONLY IN EMERGENCY MODE

Luminaire is normally off but illuminates in emergency battery operation in the event of a mains failure.

Green LED is illuminated in normal operation to indicate there is a healthy charge into the battery.

SEE PAGE 20 FOR REPLACEMENT EMERGENCY BATTERIES



THE COMPLETE EMERGENCY SERVICE

Keep up to date with new emergency products on our website

- ✓ Signs Directive range
- ✓ ISO 7010 range
- ✓ Self-Test range
- ✓ Battery Replacement Service
- ✓ 5 Year Warranty on all LED products (1 Year Warranty on batteries)

STAY SAFE • SAVE TIME • SPECIFY ETERNA

EMERGENCY VARIATIONS EXPLAINED






	Maintained (Unswitched) (Permanent Live PL)	Luminaire is continuously illuminated and will switch over to emergency, battery operation, in the event of a mains failure
	Maintained (Switched) (Switched Live SL)	Luminaire can be switched on & off in normal operation, and will switch over to emergency, battery operation, in the event of a mains failure
	Non Maintained	Luminaire is normally off but illuminates in emergency, battery operation, in the event of a mains failure
	Sustained	When a fitting has a dedicated separate lamp that operates in emergency mode

SELF-TEST EXPLAINED

www.eterna-lighting.co.uk/self-test

How does the Eterna Self-Test system work?

- ✓ On installation, the internal clock will assign a date for the monthly and annual test - the installer does not need to set anything up!
- ✓ The initial monthly test will occur between 16 and 30 days of installation. Subsequent monthly tests will occur every 30 days.
- ✓ The initial full test will occur between 200 and 360 days from installation. Subsequent annual tests will occur every 360 days.

Operation	Indicator colour	Action / number of flashes within 3 seconds
Normal operation		Constant
Duration test is underway		 Rapid
Battery circuit		
Light source failure		
Failure of duration test		
Auto test function fails		
LED indicator off	-	In Emergency mode (mains failure)

The benefits of Eterna's Self-Test Emergency Lighting

- ✓ More effective and reliable than manual testing
- ✓ Easy to install
- ✓ Saves time and money
- ✓ Testing causes no disruption to the normal operation of the building
- ✓ Staggered tests mean all areas are protected in the event of a power failure

SELF-TEST

All Eterna Self-Test products in this catalogue can be identified by the green font as shown above


When it comes to Self-Test emergency: Stay Safe • Save Time • Specify Eterna

LED EMERGENCY BULKHEADS

Low energy alternative to standard fluorescent emergency bulkheads

V1

- Polycarbonate construction • Internal or external use • 20mm gland entries as standard
- Hinged gear tray & push fit terminal block: allows for quicker and easier installation and maintenance
- Minimum 3 hour functionality in emergency mode • High output LEDs with bright white light
- Semi recessed fixing option available: BULKFRAME allows a more discreet installation option
- Dedicated self adhesive legend pack included with a combination of symbols: allows multiple exit path designation options
- Additional legend sets available: ISOLGDSET (ISO 7010 format) / LGDSET (signs directive format) which can be used as additional legend sets or as individual stickers for walls and doors
- 235 lm (mains) / 150 lm (battery) • Earthed
- Battery - Ni-Cd 3.6V 1500mAh
- Battery 1 year warranty - Replacement battery code: EB1
- IES files available




MAINTAINED VERSIONS:

- Facility for remote switching and non-maintained mode

BULKFRAME:

- Pressed steel construction • Spring retaining clips
- Semi recessed fixing: allows a more discreet installation option
- Hole cut out size: 350mm x 117mm



Code	Version / Legend Set Included	Wattage	Colour Temp.	Avg. Rated Life (Hrs)	IP Rating	Viewing Distance	MOM / OPQ
Maintained							
EML3MISO	ISO 7010	7W	6000K	30,000 hrs	IP65	20m	1 / 12
EMLED3M	Signs Directive						
Non Maintained							
EML3NMISO	ISO 7010	2W	6000K	30,000 hrs	IP65	20m	1 / 12
EMLED3NM	Signs Directive						
Accessories							
BULKFRAME	White Bulkhead Frame						1 / 12
ISOLGDSET	ISO 7010 Legend Set						12 / 12
LGDSET	Signs Directive Legend Set						12 / 12

LI-ION SELF-TEST MAINTAINED LED EMERGENCY BULKHEAD

LiFePO4 Lithium battery technology offers reduced energy consumption, enhanced charging cycle capacity & improved operational life compared to standard NiCad products. Self test technology is more effective and reliable than manual testing saving time and disruption to normal operation of the building


V1

- Polycarbonate construction • Hinged gear tray & push fit terminal block • 20mm gland entries as standard
- Minimum 3 hour functionality in emergency mode • 270 lm (mains) / 150 lm (battery)
- Facility for remote switching and non-maintained mode
- Automatic Testing complies with BS EN 62034
- Self-adhesive ISO 7010 legend pack included with a combination of symbols allowing multiple exit path designation options
- Double Insulated • Battery: Li-Ion 3.2V 1500mAh
- Battery 1 year warranty - Replacement battery code: EB19
- IES files available



BFRAME:

- Pressed steel construction • Spring retaining clips
- Semi recessed fixing: allows a more discreet installation option
- Hole cut out size: 355mm x 120mm



Code	Wattage	Colour Temp.	Avg. Rated Life (Hrs)	IP Rating	Viewing Distance	MOM / OPQ
SEMEM3	4W	6400K	40,000 hrs	IP65	20m	1 / 10
Accessories						
BFRAME	White Bulkhead Frame					1 / 50
ISOLGDSET	ISO 7010 Legend Sticker Set					1 / 12
LGDSET	Signs Directive Legend Sticker Set					1 / 12

- LED
- 5 Year Warranty
- Emergency Product
- IP65



- LED
- 5 Year Warranty
- Emergency Product
- Li-Ion Battery
- IP65



EMERGENCY LIGHTING

LI-ION MAINTAINED LED EMERGENCY BULKHEAD

LED

5
Year Warranty


Emergency Product

Li-Ion Battery

IP65



- Polycarbonate construction • Hinged gear tray • Push fit terminals • 20mm gland entries as standard
- Minimum 3 hour functionality in emergency mode
- Facility for remote switching and non-maintained mode
- ISO 7010 legend set included
- Double insulated • 270/130 lm
- Battery - Li-Ion 3.2V 1500mAh
- Battery 1 year warranty - Replacement battery code: EB17
- IES files available



Code	Wattage	Colour Temp.	Avg. Rated Life (Hrs)	IP Rating	Viewing Distance	MOM / OPQ
KEM3BULKLI	4W	6400K	40,000 hrs	IP65	20m	1 / 10
See below for accessories						

V1

ECONOMY MAINTAINED LED EMERGENCY BULKHEADS

LED


5
Year Warranty

Emergency Product

IP65



- Polycarbonate construction • Hinged gear tray • Push fit terminals • 20mm gland entries as standard
- Minimum 3 hour functionality in emergency mode
- Facility for remote switching and non-maintained mode
- Double insulated • 270/130 lm
- Battery - Ni-Cd 3.6V 800mAh
- Battery 1 year warranty - Replacement battery code: EB21



Code	Version	Wattage	Colour Temp.	Avg. Rated Life (Hrs)	IP Rating	Viewing Distance	MOM / OPQ
VECOMEM3L	Fitting With Legend	4W	6400K	40,000 hrs	IP65	20m	1 / 10
VECOMEM3	Without Legend						
See below for accessories							

V1

ECONOMY MAINTAINED LED EMERGENCY BULKHEAD

LED


5
Year Warranty

Emergency Product

IP65



- Polycarbonate construction • Hinged gear tray • Push fit terminals • 20mm gland entries as standard
- Minimum 3 hour functionality in emergency mode
- Facility for remote switching and non-maintained mode
- ISO 7010 legend set included
- Double insulated • 270/130 lm
- Battery - Ni-Cd 3.6V 800mAh
- Battery 1 year warranty - Replacement battery code: EB21
- IES files available



Code	Wattage	Colour Temp.	Avg. Rated Life (Hrs)	IP Rating	Viewing Distance	MOM / OPQ
KEM3ML	4W	6400K	40,000 hrs	IP65	20m	1 / 10
See below for accessories						

V1

ACCESSORIES FOR PRODUCTS ABOVE

1
Year Warranty


Emergency Product



- Legend sets can be used as additional legend sets or as individual stickers for walls and doors

BFRAME:

- Pressed steel construction • Spring retaining clips
- Semi recessed fixing: allows a more discreet installation option
- Hole cut out size: 355mm x 120mm



Code	Version	MOM / OPQ
BFRAME	White Bulkhead Frame	1 / 50
VECOEMISOL	ISO 7010 Legend Sticker Set	1 / 500
LGDSET	Signs Directive Legend Sticker Set	1 / 12

V1

EMERGENCY LIGHTING


LED EMERGENCY EXIT BOX SIGNS & SELF-TEST OPTION



Low energy alternative to standard emergency exit signs

V1

- Steel construction • LED charge light • Facility for remote switching
- 3 hour maintained mode as standard which can also be configured for non maintained operation
- Diffuser on base: for added downward illumination of escape route
- Long life energy efficient LED light source eliminates lamp replacement cycle without compromising panel visibility distance
- Battery test button • 55 lm • Earthed
- Battery - Ni-Cd 3.6V 1500Ah
- Battery 1 year warranty - Replacement battery code: EB4



SEEXIT3ML: Automatic testing in accordance with BS EN 62034

Code	Version / Legend Set Included	Wattage	Avg. Rated Life (Hrs)	IP Rating	Viewing Distance	MOM / OPQ
EXIT3MLED	Signs Directive Down Arrow	4W	30,000 hrs	IP20	32m	6 / 6
SEEXIT3ML	Self Test / ISO 7010 Up Arrow					


Accessories			
Signs Directive	ISO 7010	Version	MOM / OPQ
EBLGDL	ISOEBLGDL	Left Arrow Legend	1 / 100
EBLGDR	ISOEBLGDR	Right Arrow Legend	
EBLGDU	ISOEBLGDU	Up Arrow Legend	
	ISOEBLGDD	Down Arrow Legend	

LI-ION COMPACT EMERGENCY LED EXIT BOX



- Steel construction • Push fit terminals • LED charge light and battery test button
- 3 hour maintained mode as standard which can also be configured for non maintained operation
- Facility for remote switching
- Full range of interchangeable polycarbonate ISO 7010 legends available, comes complete with up arrow legend
- Diffuser on base: for added downward illumination of escape route
- Earthed • Battery - Li-Ion 3.2V 1500mAh
- Battery 1 year warranty - Replacement battery code: EB17

V2




Code	Wattage	Avg. Rated Life (Hrs)	IP Rating	Viewing Distance	MOM / OPQ
VECEXIT3M	4W	30,000 hrs	IP20	29m	1 / 20
Accessories					
VECOISOD	Down Arrow ISO 7010 Legend				1 / 20
VECOISOL	Left Arrow ISO 7010 Legend				
VECOISOR	Right Arrow ISO 7010 Legend				

LI-ION COMPACT EMERGENCY LED EXIT BOX



- Steel construction • Push fit terminals • LED charge light and battery test button
- 3 hour maintained mode as standard which can also be configured for non maintained operation
- Facility for remote switching
- Full range of interchangeable polycarbonate ISO 7010 legends available, comes complete with up arrow legend
- Diffuser on base: for added downward illumination of escape route
- Earthed • Battery - Li-Ion 3.2V 1500mAh
- Battery 1 year warranty - Replacement battery code: EB17

V2



Code	Wattage	Avg. Rated Life (Hrs)	IP Rating	Viewing Distance	MOM / OPQ
KEXIT3MLI	4W	30,000 hrs	IP20	29m	1 / 20
Accessories					
VECOISOD	Down Arrow ISO 7010 Legend				1 / 20
VECOISOL	Left Arrow ISO 7010 Legend				
VECOISOR	Right Arrow ISO 7010 Legend				

EMERGENCY LIGHTING

SLIM LED MAINTAINED EMERGENCY EXIT BOX INCLUDING LEGENDS

LED

5
Year Warranty


Emergency Product



An aesthetically pleasing, low energy, ultra slim alternative to conventional exit boxes

V1

- Polycarbonate construction • LED charge light
- Ultra slim design: excellent solution where a more compact fitting is required
- 3 hour maintained mode as standard which can also be configured for non maintained operation
- Diffuser on base: for added downward illumination of escape route
- Interchangeable down, up, left & right arrow signs directive exit legends included
- Long life energy efficient LED light source eliminates lamp replacement cycle without compromising panel visibility distance
- Facility for remote switching • For wall mounting only • Earthed
- Battery - Ni-Mh 3.6V 2000mAh
- Battery 1 year warranty - Replacement battery code: EB7



Code	Wattage	Avg. Rated Life (Hrs)	IP Rating	Viewing Distance	MOM / OPQ
EBLSLIMM	5.2W	30,000 hrs	IP20	33m	1 / 10

ETERNA EMERGENCY BATTERY PACKS ARE COMPATIBLE WITH:

LED PANELS - PAGE 37-38
COMMERCIAL DOWNLIGHTS - PAGE 54-55



EMERGENCY BATTERY PACKS & SELF-TEST OPTION


2
Year Warranty

Emergency Product



- Polycarbonate construction • LED charge light • Earthed
- Enables LED panel lights to be converted into emergency luminaires, rated at 10-60V 100W max
- Control gear can be removed from the housing: allows use in installations with smaller hole cut out
- 3 hours duration in emergency mode
- Push fit plug and socket: allows quick & easy installation
- Facility for non maintained mode and for remote switching
- Battery - Ni-Cd 3.6V 4.5Ah
- Battery 1 year warranty - Replacement battery code: EB5
- **SEEBPM3** - Automatic testing in accordance with BS EN 62034

V1



Code	Version	Maximum Load	IP Rating	MOM / OPQ
EBPM3	Standard	10-60V 100W Max	IP20	1 / 1
SEEBPM3	Self Test			

LI-ION EMERGENCY BATTERY PACK

2
Year Warranty

Emergency Product


Li-Ion Battery



Compact & lightweight emergency back up pack for use with LED panels & downlights incorporating Lithium battery technology

V1

- Tough polycarbonate enclosure • Double insulated
- LiFePO4 Lithium battery technology offering reduced energy consumption, enhanced charging cycle capacity & improved operational life compared to standard NiCad products
- 3 hour maintained or non maintained operation
- Enables LED luminaires to be converted to emergency, rated: 18-60Vdc maximum 150W load
- Charging LED housed in recessed holder allowing placement adjacent to luminaire
- Push twist & lock plug in system for quick & easy installation
- Battery - Li-Ion 6.4V 1500mAh
- Battery 1 year warranty - Replacement battery code: EB20



Code	Fitting Wattage	Maximum Load	IP Rating	MOM / OPQ
EBPM3LI	3W	18-60Vdc Maximum 150W	IP20	1 / 40

EMERGENCY LIGHTING

IP65 LED TWINSPOUT EMERGENCY FITTING




5 Year Warranty



Proven fitting with long term reliability and performance along with high ingress protection

V1

- Polycarbonate construction • IES files available
- Twin 3W LED projectors: provide superior light output to traditional twin spot fittings
- Horizontally and vertically adjustable heads, 180° rotation across the horizontal plane
- IP65 rating utilising high quality polycarbonate enclosure: for installation in wet or dusty environments
- Reduced battery capacity requirement: allows a more compact design reducing the weight dramatically compared to traditional products facilitating easier installation
- Minimum 3 hour non-maintained functionality in emergency mode
- Individual indicator to show healthy charge to battery
- Earthed • Battery - Ni-Cd 3.6V 6Ah
- Battery 1 year warranty - Replacement battery code: EB3



Code	Wattage	Colour Temp.	Lumens	Avg. Rated Life (Hrs)	IP Rating	MOM / OPQ
LEDTWNSPOT	Twin 3W	3500K	441 lm	30,000 hrs	IP65	1 / 6


LI-ION COMPACT LED EMERGENCY TWINSPOUT



5 Year Warranty



- Polycarbonate construction • Push fit terminals • IES files available
- Individual indicator to show healthy charge to battery
- Horizontally and vertically adjustable heads, 180° rotation across the horizontal plane
- Minimum 3 hour functionality in emergency mode
- Double insulated • Battery: Li-Ion 3.2V 4500mAh
- Battery 1 year warranty - Replacement battery code: EB18



V1

Code	Wattage	Colour Temp.	Lumens	Avg. Rated Life (Hrs)	IP Rating	MOM / OPQ
KTWINSPLI	2W	6300K	420 lm	40,000 hrs	IP20	1 / 20

LED EMERGENCY TWINSPOUT




5 Year Warranty



Reduced battery capacity requirement allows a more compact design reducing the weight dramatically compared to traditional products facilitating easier installation

V1

- Polycarbonate construction • 3 hour non-maintained operation
- Individual indicator to show healthy charge to battery
- Horizontally and vertically adjustable heads, 180° rotation across the horizontal plane • IES files available
- Earthed • Battery - Ni-Cd 3.6V 4.5Ah
- Battery 1 year warranty - Replacement battery code: EB16



Code	Wattage	Colour Temp.	Lumens	Avg. Rated Life (Hrs)	IP Rating	MOM / OPQ
TSPOTLIP20	3.4W	6000K	405 lm	50,000 hrs	IP20	1 / 6


COMPACT LED EMERGENCY TWINSPOUT



5 Year Warranty



- Polycarbonate construction • Push fit terminals
- Individual indicator to show healthy charge to battery
- Horizontally and vertically adjustable heads, 180° rotation across the horizontal plane
- Minimum 3 hour functionality in emergency mode
- Double insulated • Battery: Ni-Cd 3.6V 4Ah
- Battery 1 year warranty - Replacement battery code: EB13




V1

Code	Wattage	Colour Temp.	Avg. Rated Life (Hrs)	IP Rating	MOM / OPQ
VECOTWINSPO	2W	6300K	40,000 hrs	IP20	1 / 20
SETSPOT	Self Test Li-Ion version coming soon				

EMERGENCY LIGHTING

WHITE/SILVER 1.4W LED NON MAINTAINED EMERGENCY DOWNLIGHTS & SELF-TEST OPTION

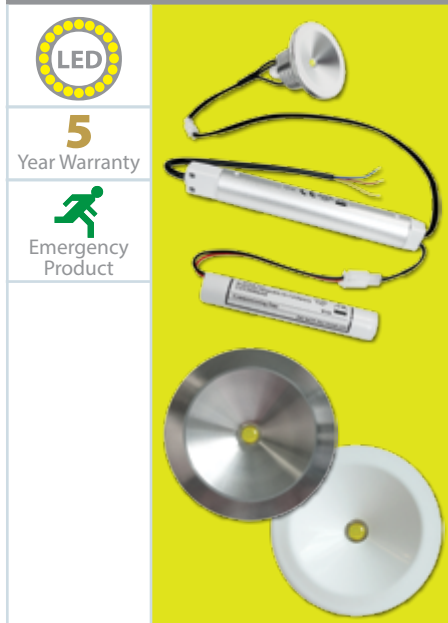

5
Year Warranty




This LED compact recessed emergency light is ideal for use in corridors, stairwells and other places that require a smart, discreet emergency unit

V1


- Aluminium construction • Compact design
- Matt silver and white trims included • Pre-wired for easy installation
- LED glows green in standby mode and super bright white light in the event of a mains failure
- Excellent alternative to a converted downlight • Minimum 3 hour functionality in emergency mode
- Earthed • Battery - Ni-Cd 3.6V 2000mAh
- IES files available
- Battery 1 year warranty - Replacement battery code: EB2

SELDLEM3: Automatic testing in accordance with BS EN 62034

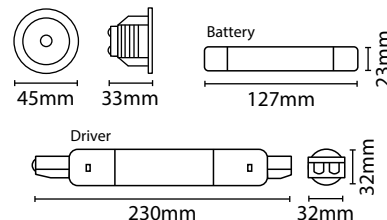

Code	Version	Wattage	Lumens	IP Rating	Hole Cut Out Size	MOM / OPQ
LDLEM3	Standard	1.4W	118 lm	IP20	32mm	1 / 20
SELDLEM3	Self Test					

WHITE/BLACK/SILVER LI-ION EMERGENCY 2W LED DOWNLIGHT

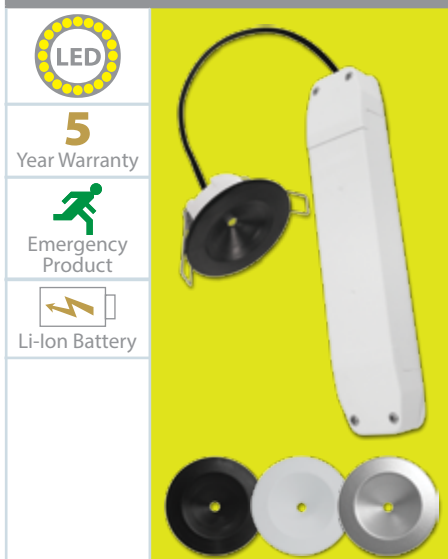


5
Year Warranty



Unobtrusive emergency downlight with lightweight all-in-one compact control pack including Lithium battery technology


V1

- White, matt silver and black bezels included • IES files available
- LiFePO4 Lithium battery technology offering reduced energy consumption, enhanced charging cycle capacity & improved operational life compared to standard NiCad products
- Optic designed for open area and escape route lighting • Built-in battery overcharge protection
- 3 hour non maintained operation • Integrated green charging indicator LED
- Integral LED glows green in standby mode and super bright white light in the event of a mains failure
- Double insulated • Battery - Li-Ion 3.2V 1500mAh
- Battery 1 year warranty - Replacement battery code: EB19



Code	Wattage	Lumens	IP Rating	Hole Cut Out Size	MOM / OPQ
LDLEM3LI	2W	160 lm	IP20	50mm	1 / 40

WHITE/BLACK/SILVER LI-ION EMERGENCY 2W LED DOWNLIGHT

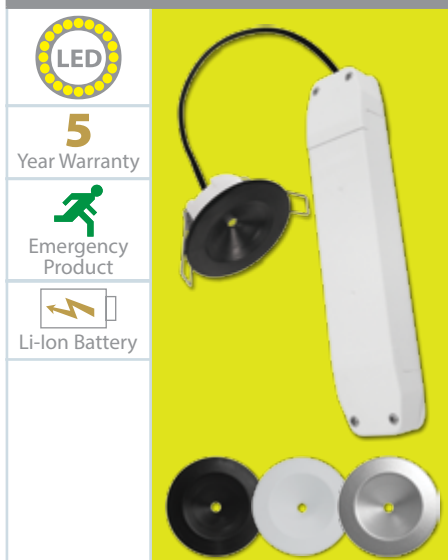


5
Year Warranty



Unobtrusive emergency downlight with lightweight all-in-one compact control pack including Lithium battery technology


V1

- White, matt silver and black bezels included • IES files available
- LiFePO4 Lithium battery technology offering reduced energy consumption, enhanced charging cycle capacity & improved operational life compared to standard NiCad products
- Optic designed for open area and escape route lighting • Built-in battery overcharge protection
- 3 hour non maintained operation • Integrated green charging indicator LED
- Integral LED glows green in standby mode and super bright white light in the event of a mains failure
- Double insulated • Battery - Li-Ion 3.2V 1500mAh
- Battery 1 year warranty - Replacement battery code: EB19



Code	Wattage	Lumens	IP Rating	Hole Cut Out Size	MOM / OPQ
KEM3LIDL	2W	160 lm	IP20	50mm	1 / 40

EMERGENCY LIGHTING

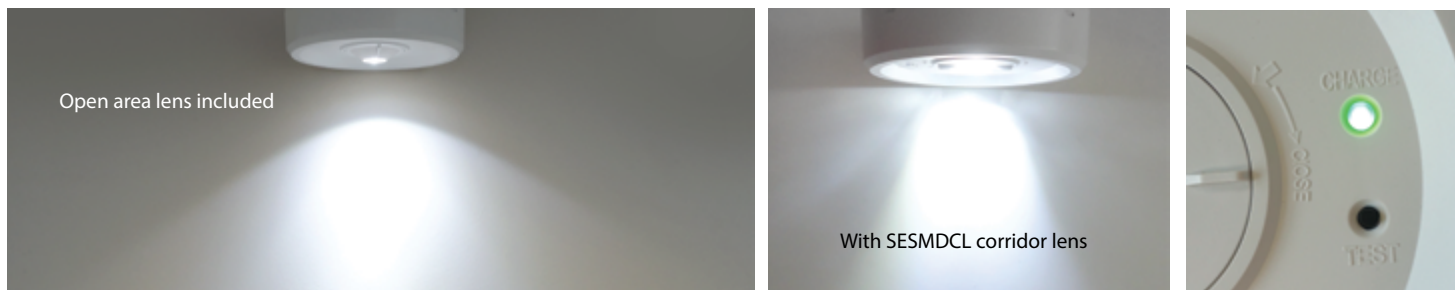


SELF-TEST SURFACE MOUNT EMERGENCY DOWNLIGHT



High Quality, Self-Test emergency downlight, suitable for open area and corridor applications where solid ceilings exist V1

- Polycarbonate construction • Compact design • IES files available
- Automatic testing in accordance with BS EN 62034
- LED glows green in standby mode and super bright white light in the event of a mains failure
- Excellent solution where solid ceilings prevent recessed installation of an emergency downlight
- Minimum 3 hour functionality in emergency mode
- Supplied with open area lens. Corridor lens available separately - SESMDCL
- Earthed • Battery - Ni-Cd 3.6V 2000mAh
- Battery 1 year warranty - Replacement battery code: EB15




Code	Wattage	Lumens	IP Rating	MOM / OPQ
SESMDLEM3	3W	150 lm	IP20	1 / 20
SESMDCL	Corridor Lens			



LED MULTI FIXING EXIT SIGN

- Polycarbonate construction • LED charge light and battery test button
- Comes complete with 4 fixing options - ceiling mounted, end mounted, wall mounted and suspended (adjustable length 1m suspension cable included)
- Supplied with a double-sided up arrow ISO 7010 format exit legend - full range of alternative legend directional panels available separately including signs directive format
- 3 hour maintained mode as standard which can also be configured for non-maintained or remote switched operation
- 35 lm (mains) / 25 lm (battery)
- Additional recessed option available with EXITREC
- Earthed • Battery - Ni-Cd 3.6V 800mAh
- Battery 1 year warranty - Replacement battery code: EB8

EXITREC: Hole cut out size: 360mm x 65mm

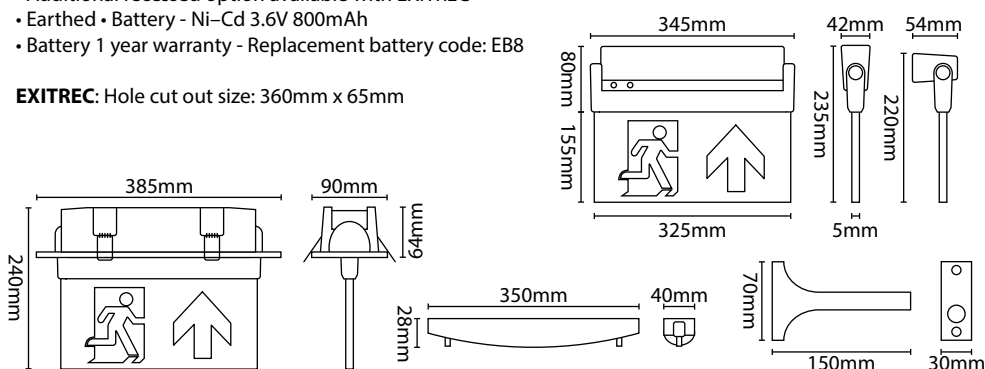

Code	Version	Wattage	Colour Temp.	Viewing Distance	IP Rating	MOM / OPQ
EXITMMO	Fitting	2.8W	6000K	30m	IP20	1 / 6
Accessories						
EXITREC	White Recessed Mounting Kit					1 / 25
ISOMMOLR	ISO 7010 Left/Right Arrow Legend					1 / 100
ISOMMOD	ISO 7010 Down Arrow Legend					
EMMOUP	Signs Directive Up Arrow Legend					
EMMOD	Signs Directive Down Arrow Legend					
EMMOLR	Signs Directive Left/Right Arrow Legend					

EMERGENCY LIGHTING

Our most versatile Exit Sign - EXITMMO - page 12



LED EMERGENCY HANGING EXIT SIGN LIGHT & **SELF-TEST** OPTION




5
Year Warranty



- Polycarbonate construction • Test button and LED charge light • 171 lm
- Remote connection box complete with adjustable length suspension cable (max 80cm)
- 3 hour maintained mode as standard which can also be configured for non-maintained or remote switched operation
- Supplied with a double-sided exit legend - signs directive & ISO legends available separately (see below for versions)
- Earthed • Battery - Ni-Cd 3.6V 800mAh
- Battery 1 year warranty - Replacement battery code: EB8

V1

SEIGNLEM3: Automatic testing in accordance with BS EN 62034



Code	Version / Legend Set Included	Wattage	Colour Temp.	Avg. Rated Life (Hrs)	Viewing Distance	IP Rating	MOM / OPQ
SIGNLEDEM3	Signs Dir. Down Arrow	2.3W	6000K	25,000 hrs	29m	IP20	1 / 6
SEIGNLEM3	Self Test / ISO Up Arrow						1 / 6
Accessories							
SIGNLGD	Signs Directive Left/Right Arrow Legend						1 / 100
SIGNLGDUP	Signs Directive Up Arrow Legend						
ISOSIGND	ISO 7010 Down Arrow Legend						
ISOSIGNLR	ISO 7010 Left/Right Arrow Legend						

LED MAINTAINED RECESSED EMERGENCY FITTINGS WITH EDGE LIT PANEL





5
Year Warranty



Low energy alternative to standard emergency exit fittings

V1

- Pressed steel body • Hole cut out size: 115mm x 320mm
- Hinged gear tray: easy installation and maintenance
- Slotted pressed steel panel housing polycarbonate exit legend for unobtrusive exit path designation
- Earthed • Battery - Ni-Cd 4.8V 600mAh
- Battery 1 year warranty - Replacement battery code: EB9

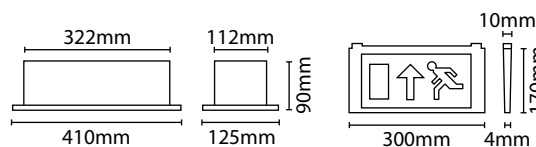

Code	Version / Legend Set Included	Wattage	Colour Temp.	Avg. Rated Life (Hrs)	Viewing Distance	IP Rating	MOM / OPQ
LEDMDDEM3	Signs Dir. Down Arrow	3.5W	6500K	18,000 hrs	30m	IP20	1 / 6
LMDDDEM3ISO	ISO 7010 Up Arrow						1 / 6
Accessories							
RLGDLR	Signs Directive Left/Right Arrow Legend						1 / 25
RLGDUP	Signs Directive Up Arrow Legend						
ISOMDDLRL	ISO 7010 Left/Right Arrow Legend						1 / 100
ISOMDDDD	ISO 7010 Down Arrow Legend						


FRESH PRINCE LI-ION EMERGENCY POWER AND COLOUR TEMPERATURE SELECTABLE CIRCULAR / SQUARE LED UTILITY FITTINGS



- LED
- 5 Year Warranty
- Emergency Product
- Li-Ion Battery
- IP65
- IK08
- Power Selectable
- Colour Temp. Selectable
- Microwave Sensor

High output, energy saving utility LED wall / ceiling fixtures with standard, emergency & multi-function microwave control versions. Both opal & prismatic versions are available for either smooth diffused effect or maximum light output. Diffusers are supplied not fitted to bases and fully captive diffuser fixing screws are utilised to save installation time. Step Dim microwave versions provide the best in flexibility & energy saving options

- Polycarbonate construction • Push fit terminals • Hinged gear tray • Captive fixing screws
- Four 20mm cable entries on the side and one to the rear
- Power Selectable - options of 9W, 14W and 18W easily set by a dip switch on the driver
- Colour temperature selectable - options of 3000K, 4400K & 6500K easily set by a dip switch on the driver
- 3 hour maintained mode as standard which can also be configured for non maintained operation
- IES files available • Double insulated • Battery - Li-Ion 3.2V 1500mAh
- Battery 1 year warranty - Replacement battery code: EB11



See page 22 for full range including MW Sensor information

Code	Version	Colour Temp.	Lumens			Avg. Rated Life (Hrs)	IP / IK Rating	MOM / OPQ
			9W	14W	18W			
CIRCULAR OPAL DIFFUSER								
OPCIREM3	EM3	3000K	1090 lm	1610 lm	1970 lm	50,000 hrs	IP65 IK08	1 / 8
OPCIRMW3	SD + EM3	4400K	1160 lm	1770 lm	2190 lm			
		6500K	1130 lm	1700 lm	2080 lm			
CIRCULAR PRISMATIC DIFFUSER								
PRCIREM3	EM3	3000K	1180 lm	1715 lm	2055 lm	50,000 hrs	IP65 IK08	1 / 8
PRCIRMW3	SD + EM3	4400K	1270 lm	1890 lm	2270 lm			
		6500K	1230 lm	1780 lm	2180 lm			
SQUARE OPAL DIFFUSER								
OPSQEM3	EM3	3000K	1080 lm	1630 lm	1980 lm	50,000 hrs	IP65 IK08	1 / 8
OPSQMW3	SD + EM3	4400K	1150 lm	1770 lm	2200 lm			
		6500K	1120 lm	1700 lm	2070 lm			
SQUARE PRISMATIC DIFFUSER								
PRSQEM3	EM3	3000K	1150 lm	1730 lm	2100 lm	50,000 hrs	IP65 IK08	1 / 8
PRSQMW3	SD + EM3	4400K	1250 lm	1870 lm	2360 lm			
		6500K	1200 lm	1830 lm	2200 lm			


FRESH PRINCE LI-ION EMERGENCY CIRCULAR / SQUARE LED UTILITY FITTINGS



- LED
- 5 Year Warranty
- Emergency Product
- Li-Ion Battery
- IP65
- IK08
- Microwave Sensor

High output, energy saving utility LED wall / ceiling fixtures. Diffusers are supplied not fitted to bases and fully captive diffuser fixing screws are utilised to save installation time. Multi-function microwave versions provide the best in flexibility & energy saving options

- Polycarbonate construction • Push fit terminals • Full circular / square LED array • Hinged gear tray
- Captive fixing screws • Four 20mm cable entries on the side and one to the rear
- 3 hour maintained mode as standard which can also be configured for non maintained operation
- IES files available • Earthed • Battery - Li-Ion 3.2V 1500mAh
- Battery 1 year warranty - Replacement battery code: EB11




See page 23 for full range including MW Sensor information

Code	Version	Wattage	Colour Temp.	Diffuser / Lumens	Avg. Rated Life (Hrs)	IP / IK Rating	MOM / OPQ
CIRCULAR FITTINGS							
CIROPALEM3	EM3	18W	4000K	Opal 1400 lm	35,000 hrs	IP65 IK08	1 / 1
CIROPALMW3	MW + EM3			Prismatic 1600 lm			
CIRPRISEM3	EM3						
CIRPRISMW3	MW + EM3						
SQUARE FITTINGS							
SQOPALEM3	EM3	18W	4000K	Opal 1400 lm	35,000 hrs	IP65 IK08	1 / 1
SQOPALMW3	MW + EM3			Prismatic 1600 lm			
SQPRISEM3	EM3						
SQPRISMW3	MW + EM3						

EMERGENCY LIGHTING

CHARA LI-ION EMERGENCY POWER AND COLOUR TEMPERATURE SELECTABLE CIRCULAR LED CEILING/WALL LIGHTS

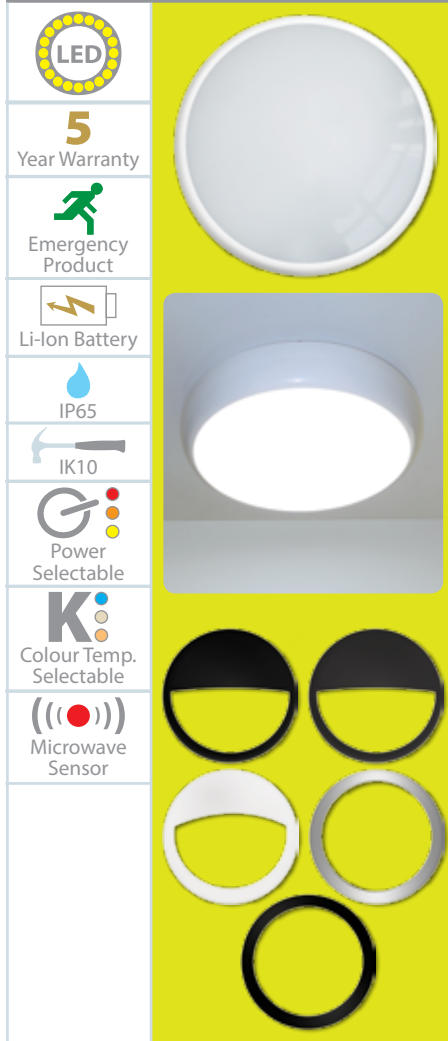


Offering 3 selectable power levels and 3 selectable colour temperatures, this versatile range offers the ultimate in practicality and multiple options from a single product. Suitable for interior or exterior installation the range of accessories ensures suitability for functional or decorative applications

V1

- All fittings come with a white full trim
- Hinged LED array
- Push fit terminal block
- Polycarbonate diffuser
- Optional accessories available separately: black, white and grey eyelid trims or full chrome trim
- Power Selectable - options of 9W, 14W and 18W easily set by a dip switch on the driver
- Colour temperature selectable - options of 3000K, 4400K & 6500K easily set by a dip switch on the driver
- Enclosure rated as IK10 for impact resistance
- Central BESA box mounting option on the base
- 3 hour maintained mode as standard which can also be configured for non maintained operation
- Double insulated • Battery - Li-Ion 3.2V 1500mAh
- Battery 1 year warranty - Replacement battery code: EB11
- IES files available

See page 24 for full range including MW Sensor information



Code	Version	Colour Temp.	Lumens			Avg. Rated Life (Hrs)	IP / IK Rating	MOM / OPQ
			9W	14W	18W			
CHA18EM3	EM3	3000K	1000 lm	1500 lm	1880 lm	40,000 hrs	IP65 IK10	1 / 10
CHA18MW3	MW + EM3	4400K	1100 lm	1670 lm	2130 lm			
CHA18SDEM3	SD + EM3	6500K	1100 lm	1640 lm	2050 lm			
CHAEYEBK	Black Eyelid Trim							1 / 1
CHAEYEGY	Grey Eyelid Trim							
CHAEYEWB	White Eyelid Trim							
CHAFULLBK	Black Full Trim							
CHAFULLCR	Chrome Full Trim							


CHARA LI-ION EMERGENCY COLOUR TEMPERATURE SELECTABLE CIRCULAR LED CEILING/WALL LIGHTS



- Polycarbonate diffuser
- Hinged LED array • Push fit terminal block
- All fittings come with a white full trim
- Colour temperature selectable - options of 3000K, 4200K & 6000K easily set by a dip switch on the driver
- Enclosure rated as IK08 for impact resistance
- Central BESA box mounting option on the base
- 3 hour maintained mode as standard which can also be configured for non maintained operation
- Double insulated • Battery - Li-Ion 3.2V 1500mAh
- Battery 1 year warranty - Replacement battery code: EB11
- IES files available

V2

See page 25 for full range including MW Sensor information



Code	Version	Wattage	Colour Temp.	Lumens	Avg. Rated Life (Hrs)	IP / IK Rating	MOM / OPQ	
KCIREM3	EM3	14W	3000K	1560 lm	50,000 hrs	IP65 IK10	1 / 10	
KCIRMW3	MW + EM3		4200K	1670 lm				
			6000K	1600 lm				
KCIREYEBK	Black Eyelid Trim							1 / 1
KCIREYEGY	Grey Eyelid Trim							
KCIREYEWB	White Eyelid Trim							
KCIRFULLBK	Black Full Trim							
KCIRFULLCR	Chrome Full Trim							

EMERGENCY LIGHTING

CHAMELEON LI-ION EMERGENCY IP65 CIRCULAR LED MODULAR FITTINGS




- LED
- 5 Year Warranty
- Emergency Product
- Li-Ion Battery
- IP65
- IK08
- Colour Temp. Selectable
- Microwave Sensor

A flexible range of LED wall/ceiling fittings with standard, emergency, microwave, emergency and photocell variants. The ability to easily choose the colour temperature to suit the installation is complimented with the accessories available. The accessories enable you to transform the fittings from utility to decorative. Along with different colour options to suit the application as required

V1

- Polycarbonate diffuser • Circular LED array
- Push fit terminal block • Stainless steel captive fixing screws
- Colour temperature selectable - options of 3100K, 4200K & 6400K easily set by dip switches
- Four 20mm cable entries on the side and one to the rear
- 3 hour maintained mode as standard which can also be configured for non maintained operation
- Double insulated • Battery - Li-Ion 3.2V 1500mAh
- Battery 1 year warranty - Replacement battery code: EB11
- IES files available

See page 27 for full range including MW Sensor information



Code	Version	Wattage	Colour Temp.	Lumens	Avg. Rated Life (Hrs)	IP / IK Rating	MOM / OPQ
12W Colour Temperature Selectable							
CO12EM3	EM3	12W	3100K	1180 lm	40,000 hrs	IP65 IK08	1 / 10
CO12MW3	MW + EM3		4200K	1290 lm			
			6400K	1230 lm			
18W Colour Temperature Selectable							
CO18EM3	EM3	18W	3100K	1580 lm	35,000 hrs	IP65 IK08	1 / 10
CO18MW3	MW + EM3		4200K	1640 lm			
			6400K	1600 lm			
Accessories							
GRILLWH	White Grill Trim						1 / 50
GRILLBK	Black Grill Trim						
EYEWLH	White Eyelid Trim						
EYEBK	Black Eyelid Trim						
CIRCWH	White Full Trim						
CIRCBK	Black Full Trim						
CIRCCR	Chrome Full Trim						
CPRIS	Prismatic Diffuser						

CARINA LED COLOUR SELECTABLE FITTINGS & LI-ION EMERGENCY VERSIONS




- LED
- 5 Year Warranty
- Emergency Product
- Li-Ion Battery
- IP65
- Colour Temp. Selectable
- Microwave Sensor

Versatile range of decorative bulkheads, offering practicality and style with multiple functional options

V1

- Polycarbonate construction • Full circular LED array • IP65, ceiling or wall mounted
- Colour temperature selectable - options of 3100K, 4200K & 6400K easily set by a dip switch on the gear tray
- Plug in connector between the terminal block and the gear tray. Terminal block is located on the base, allowing for easy wiring and the gear tray to be removed during installation
- 3 hour maintained mode as standard which can also be configured for non maintained operation
- Double insulated • Battery - Li-Ion 3.2V 1500mAh
- Battery 1 year warranty - Replacement battery code: EB11
- IES files available

See page 26 for full range including MW Sensor information



Code	Colour	Version	Wattage	Colour Temp.	Lumens	Avg. Rated Life (Hrs)	IP Rating	MOM / OPQ
CSLEDCREM3	Chrome	EM3	17W	3100K 4200K 6400K	1250 lm 1350 lm 1300 lm	35,000 hrs	IP65	1 / 8
CSLEDWHEM3	White							
MSCSLCREM3	Chrome	MW + EM3						
MSCSLWHEM3	White							
SDCSLCREM3	Chrome	SD + EM3						
SDCSLWHEM3	White							

EMERGENCY LIGHTING

CARINA LI-ION EMERGENCY LED CEILING/WALL LIGHTS

LED

5
Year Warranty

Emergency Product

Li-Ion Battery


IP65

Microwave Sensor



- Polycarbonate construction • Visually similar, energy efficient alternative to 28W 2D fittings
- Multiple low power LED array & optically optimised diffuser: ensures a soft lighting effect with no degradation of light output
- 3hr maintained emergency lighting: also available in non-emergency options
- Facility for non-maintained mode
- Earthed • Battery - Li-Ion 3.2V 1500mAh
- Battery 1 year warranty - Replacement battery code: EB1

See page 26 for full range including MW Sensor information



Code	Version	Wattage	Colour Temp.	Lumens	Avg. Rated Life (Hrs)	IP Rating	MOM / OPQ
CFLWHEM3SC	EM3	17W	4000K	1843 lm	50,000 hrs	IP65	1 / 8
MSLWHEM3SC	MW + EM3						

V2

LI-ION EMERGENCY LED ALUMINIUM WALL LIGHTS

LED

5
Year Warranty

Emergency Product

Li-Ion Battery

IP65

IK10


Microwave Sensor



Superior range of die-cast aluminium fittings offering multiple functions and trim options suitable for outdoor applications where performance, style and durability are required. Modern and robust design with options

- Die-cast aluminium base and bezel • Polycarbonate diffuser • Full circular/eyelid LED array
- Plug in connector between the terminal block and the gear tray. Terminal block is located on the base, allowing for easy wiring and the gear tray to be removed during installation
- Four 20mm cable entries • Tamper-proof, captive, stainless steel allen key screws
- 3 hour maintained mode as standard which can also be configured for non-maintained operation
- Earthed • Battery - Li-ion 3.2V 1500mAh
- Battery 1 year warranty - Replacement battery code: EB1
- IES files available

See page 29 for full range including MW Sensor information



Code	Colour	Version	Wattage	Colour Temp.	Lumens	Avg. Rated Life (Hrs)	IP / IK Rating	MOM / OPQ
Eyelid Trim								
ALMF3WHEYE	White	MW + EM3	18W	4200K	1300 lm	35,000 hrs	IP65 IK10	1 / 1
Grill Trim								
ALMF3BKGR1	Black	MW + EM3	18W	4200K	1400 lm	35,000 hrs	IP65 IK10	1 / 1
ALMF3WHGR1	White							
ALEM3WHGR1	White	EM3						

V1

EMERGENCY 5FT LED TWIN SLIMLINE CEILING FITTING

LED

5
Year Warranty

Emergency Product



A slim, modern design LED ceiling fitting which offers a more stylish alternative to traditional battens. Where a more aesthetically pleasing fixture is desirable this versatile and elegant light source is suitable for commercial, retail and domestic applications

- Polycarbonate and aluminium construction • Earthed
- Push terminal connections • 100 lm/W
- LED glows green in standby mode and super bright white light in the event of a mains failure
- Minimum 3 hour functionality in emergency mode
- 118 lumens in emergency mode
- Battery - Ni-Cd 3.6V 2000mAh • Battery 1 year warranty - Replacement battery code: EB2



Code	Wattage	Colour Temp.	Lumens	Avg. Rated Life (Hrs)	IP Rating	MOM / OPQ
ELEGAN5EM3	50W	4000K	5000 lm	40,000 hrs	IP20	1 / 6
ELESUSPACK	Suspension Pack - Cable Length: 1m					1 / 100

V1

EMERGENCY LIGHTING

Emergency module glows green in standby mode

Bright white glow in emergency mode



LI-ION LED STANDARD & HIGH OUTPUT EMERGENCY BATTENS



5 Year Warranty



Emergency Product




Li-ion Battery




Full photometric data available to enable lighting designs. Light output is equivalent or superior to traditional fluorescent battens

V1

- Pressed steel body and polycarbonate diffuser
- LED tray can be removed from the housing for easy installation
- 20mm knockout glands at each end for through wiring options
- BESA box mounting • Gear tray retaining straps
- Push terminal connections
- LiFePO4 Lithium battery technology offering reduced energy consumption, enhanced charging cycle capacity & improved operational life compared to standard NiCad products
- Built-in battery overcharge protection • 3 hour non maintained operation
- Integrated green charging indicator LED • 160 lm in emergency mode
- IES files available • Earthed • Battery - Li-Ion 3.2V 1500mAh
- Battery 1 year warranty - Replacement battery code: EB19



Li-Ion Emergency Box



Code	Version	Wattage	Colour Temp.	Lumens	Avg. Rated Life (Hrs)	IP Rating	MOM / OPQ
BATL4FTEM3	4ft EM3	23W	4200K	2950 lm	35,000 hrs	IP20	1 / 6
BATL5FTEM3	5ft EM3	38W		4750 lm			
BATL6FTEM3	6ft EM3	48W		6050 lm			
BATL5HOEM3	5ft High Output EM3	60W		7550 lm			
BATL6HOEM3	6ft High Output EM3	65W		8450 lm			

SELF-TEST LED STANDARD & HIGH OUTPUT BATTENS



5 Year Warranty




Emergency Product




Full photometric data available to enable lighting designs. Light output is equivalent or superior to traditional fluorescent battens

V1

- Pressed steel body and polycarbonate diffuser
- LED tray can be removed from the housing for easy installation
- 20mm knockout glands at each end for through wiring options
- BESA box mounting • Gear tray retaining straps
- Push terminal connections • >120 lm/W
- Automatic testing in accordance with BS EN 62034
- Pre-wired for easy installation
- LED glows green in standby mode and super bright white light in the event of a mains failure
- Minimum 3 hour functionality in emergency mode • 118 lumens in emergency mode
- Earthed • Battery - Ni-Cd 3.6V 2000mAh • Battery 1 year warranty - Replacement battery code: EB2




Emergency Box



Code	Version	Wattage	Colour Temp.	Lumens	Avg. Rated Life (Hrs)	IP Rating	MOM / OPQ
SELB4FTEM3	4ft EM3	23W	4200K	2930 lm	35,000 hrs	IP20	1 / 6
SELB5FTEM3	5ft EM3	38W		4800 lm			
SELB6FTEM3	6ft EM3	48W		6000 lm			
SELB5HOEM3	5ft High Output EM3	65W		7900 lm			
SELB6HOEM3	6ft High Output EM3	70W		8600 lm			

EMERGENCY LIGHTING

LI-ION EMERGENCY LED WEATHERPROOF IP65 BATTENS

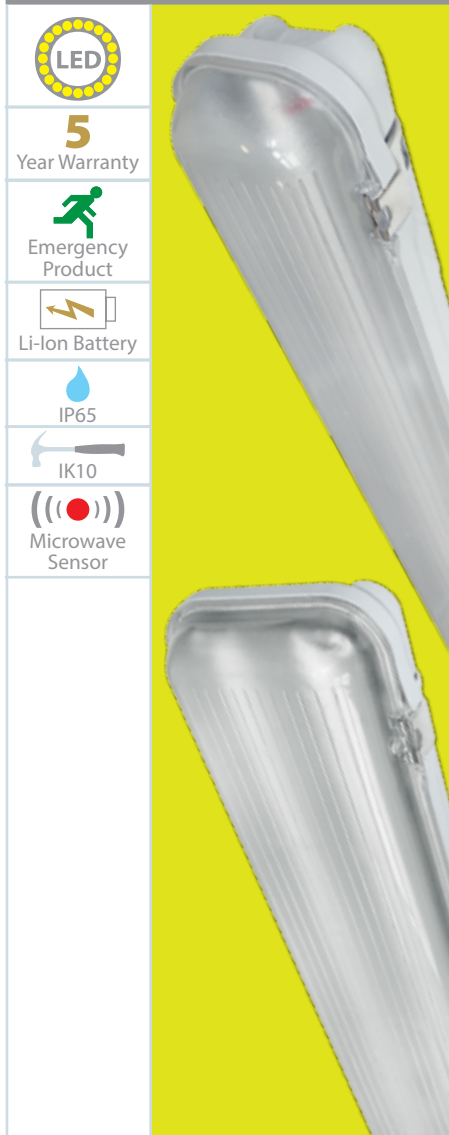


5
Year Warranty



This range is quick and easy to install due to "loop in & out" push fit connectors and features an IK10 "anti-drop" diffuser

V1

- Multiple cable entries, allowing for "loop in & out" wiring via push fit terminal block
- "Anti-drop" polycarbonate diffuser & gear tray for ease of installation
- Producing up to 106 lm/W
- Three mounting options - BESA box, directly onto ceiling surfaces or stainless steel suspension clips (incl)
- Stainless steel diffuser clips supplied as standard, suitable for food industry applications
- Standard fitting operating temperature: -20 to 45°C • Emergency fitting operating temperature: 0 to 45°C
- Supplied with a 20mm IP65 gland & fixings kit
- IK10 rated fitting maximises durability and strength
- LED performance allows for "like for like" replacement of existing fluorescent luminaires
- Emergency 3 hour duration maintained operation with the facility for remote switching
- Earthed • Battery - Li-Ion 6.4V 1500mAh
- Battery 1 year warranty - Replacement battery code: EB20
- IES files available



Single: 90mm
Twin: 135mm

See page 44 for full range including MW Sensor information

Code	Version	Wattage	Colour Temp.	Lumens	Avg. Rated Life (Hrs)	IP / IK Rating	MOM / OPQ
Emergency							
WP41EM3	4ft Single	19W	4000K	1950 lm	40,000 hrs	IP65 IK10	1 / 1
WP42EM3	4ft Twin	38W		3880 lm			
WP51EM3	5ft Single	30W		3180 lm			
WP52EM3	5ft Twin	58W		6020 lm			
WP61EM3	6ft Single	35W		3680 lm			
WP62EM3	6ft Twin	68W		6980 lm			
MW Sensor + Emergency							
WP41MW3	4ft Single	19W	4000K	1950 lm	40,000 hrs	IP65 IK10	1 / 1
WP42MW3	4ft Twin	38W		3880 lm			
WP51MW3	5ft Single	30W		3180 lm			
WP52MW3	5ft Twin	58W		6020 lm			
WP61MW3	6ft Single	35W		3680 lm			
WP62MW3	6ft Twin	68W		6980 lm			

LI-ION EMERGENCY LED WEATHERPROOF IP65 BATTENS




5
Year Warranty



This range is quick and easy to install due to "loop in & out" push fit connectors and features an IK10 "anti-drop" diffuser

V1

- Multiple cable entries, allowing for "loop in & out" wiring via push fit terminal block
- "Anti-drop" polycarbonate diffuser & gear tray for ease of installation
- Three mounting options - BESA box, directly onto ceiling surfaces or stainless steel suspension clips (incl)
- Stainless steel diffuser clips supplied as standard, suitable for food industry applications
- Standard fitting operating temperature: -20 to 45°C • Emergency fitting operating temperature: 0 to 45°C
- Supplied with a 20mm IP65 gland & fixings kit • IK10 rated fitting maximises durability and strength
- LED performance allows for "like for like" replacement of existing fluorescent luminaires
- Producing up to 106 lm/W • IES files available for lighting designs
- Emergency 3 hour duration maintained operation with the facility for remote switching
- Earthed • Battery - Li-Ion 6.4V 1500mAh
- Battery 1 year warranty - Replacement battery code: EB20
- IES files available



Single: 90mm
Twin: 135mm

Code	Version	Wattage	Colour Temp.	Lumens	Avg. Rated Life (Hrs)	IP / IK Rating	MOM / OPQ
KWP3EM3SIN5	5ft Single	30W	4000K	3180 lm	40,000 hrs	IP65 IK10	1 / 1
KWP3EM3TWI5	5ft Twin	58W		6020 lm			
KWP3EM3SIN6	6ft Single	35W		3680 lm			
KWP3EM3TWI6	6ft Twin	68W		6980 lm			

Helping your Emergency Lighting perform longer!....



Like most competitors, we are unable to include batteries in extended warranties, but do feel it's unfair & not environmentally friendly that good fittings become redundant due to the battery reaching the end of its life.

We would firstly suggest that you follow our maintenance guidance (see below) on emergency products to maximise battery life, but would also like to offer the reassurance of a battery replacement service to support our current emergency product offer – we will try to help with legacy products but cannot guarantee availability.

Please note that in the unlikely event your new fitting is supplied with a faulty battery, we will replace the battery free of charge subject to our terms and conditions.

WE ONLY RECOMMEND ETERNA REPLACEMENT BATTERIES WITH ETERNA EMERGENCY PRODUCTS

Code	Version
EB1	Ni-Cd 3.6V 1500mAh Stick Battery
EB2	Ni-Cd 3.6V 2000mAh Stick Battery
EB3	Ni-Cd 3.6V 6Ah Side-by-side Battery
EB4	Ni-Cd 3.6V 1500mAh Side-by-side Battery
EB5	Ni-Cd 3.6V 4.5Ah Stick Battery
EB6	Ni-Cd 3.6V 1300mAh Stick Battery
EB7	Ni-Mh 3.6V 2000mAh Side-by-side Battery
EB8	Ni-Cd 3.6V 800mAh Side-by-side Battery
EB9	Ni-Cd 4.8V 600mAh Side-by-side Battery
EB10/2	Ni-Cd 6V 2000mAh Side-by-Side Battery
EB11	Li-ion 3.2V 1500mAh Stick Battery

Code	Version
EB12	Ni-Cd 3.6V 1500mAh Stick Battery
EB13	Ni-Cd 3.6V 4000mAh Side-by-side Battery
EB14	Ni-Cd 3.6V 1800mAh Stick Battery
EB15	Ni-Cd 3.6V 2Ah 3-Linked Battery
EB16	Ni-Cd 3.6V 4.5Ah Side by Side Battery
EB17	Li-Ion 3.2V 1500mAh Stick Battery
EB18	Li-Ion 3.2V 4500mAh Side-by-Side Battery
EB19	Li-Ion 3.2V 1500mAh Stick Battery
EB20	Li-Ion 6.4V 1500mAh Stick Battery
EB21	Ni-Cd 3.6V 800mAh Stick Battery
See website for more details	



IMPORTANT OPERATIONAL CHECKS TO KEEP YOUR FITTING WORKING

Periodic testing should be carried out to ensure emergency lighting is operating correctly. For the period of the test, isolate the power supply by operation of a key switch, or other isolation device. At the end of the test, power should be restored and all indicator lamps checked.

DAILY: Visual inspection of the battery charge LED.

EACH MONTH: Isolate the power supply for a period sufficient to ensure that each lamp is illuminated. Endorse the test record form supplied.

ONCE EACH YEAR: Isolate the power supply and check that the light is still illuminated after 3 hours. Endorse the test record form.

BATTERY REPLACEMENT

If after routine operation check, the lamp does not remain illuminated for the three hour period, a new battery pack may be required.

- 01) Switch off the electricity at the mains, both switched and permanent supply.
- 02) Allow batteries to fully discharge then reconnect to supply and allow to charge for 24 hours.
- 03) Test again for 3 hours, if light does not remain illuminated change the battery pack.
- 04) Check install guides for procedure on changing the battery.



DOWNLOAD AND PRINT EXTRA STANDARD AND SELF-TEST MAINTENANCE RECORD FORMS FOR FREE FROM OUR WEBSITE

www.eterna-lighting.co.uk/battery-replacement-service

CEILING/WALL/BULKHEADS



**POWER & COLOUR
TEMPERATURE
SELECTABLE
UTILITY FITTINGS
NOW AVAILABLE
FROM ETERNA**

LOOK OUT FOR THE ICONS (RIGHT)





ALL LED FITTINGS COME WITH A 5 YEAR WARRANTY
for more information see - www.eterna-lighting.co.uk/warranties/

IK RATING

The IK code (Impact Protection Rating) classifies the level of protection an electrical equipment enclosure provides from external mechanical impacts. **FREE** IK guide can be downloaded and printed from our website: www.eterna-lighting.co.uk/guides/

TO SEE THE PRODUCTS
IK RATING LOOK OUT
FOR THE ICON (RIGHT)

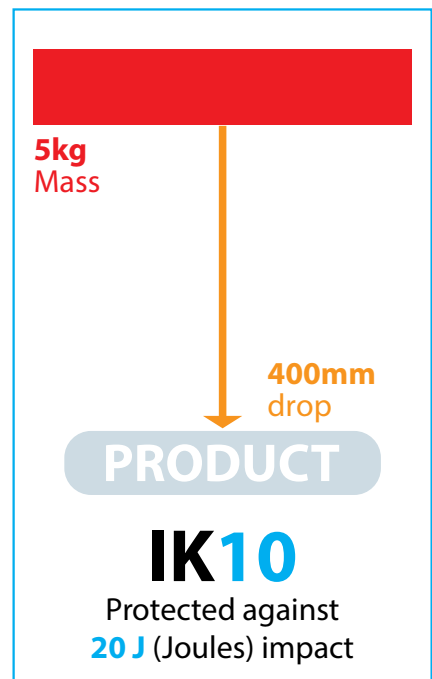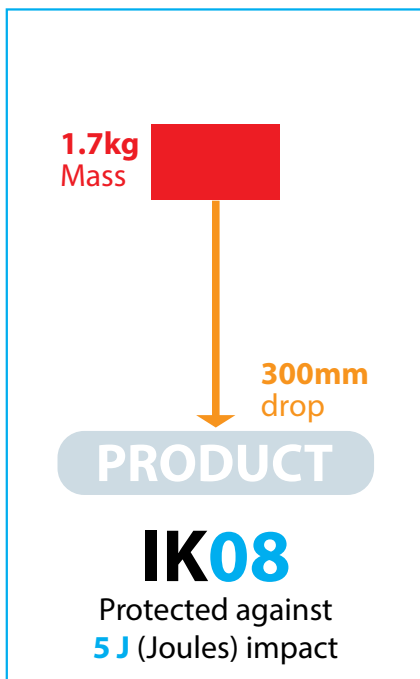

FRESH PRINCE POWER AND COLOUR TEMPERATURE SELECTABLE CIRCULAR / SQUARE LED UTILITY FITTINGS & LI-ION EMERGENCY VERSIONS

V3



5
Year Warranty



Li-Ion Battery



IK08



Colour Temp. Selectable



Microwave Sensor



High output, energy saving utility LED wall / ceiling fixtures with standard, emergency & multi-function microwave control versions. Both opal & prismatic versions are available for either smooth diffuser effect or maximum light output. Diffusers are supplied not fitted to bases and fully captive diffuser fixing screws are utilised to save installation time. Step Dim microwave versions provide the best in flexibility & energy saving options

- Polycarbonate construction
- Push fit terminals
- Hinged gear tray
- Captive fixing screws
- Four 20mm cable entries on the side and one to the rear
- Power Selectable - options of 9W, 14W and 18W easily set by a dip switch on the driver
- Colour temperature selectable - options of 3000K, 4400K & 6500K easily set by a dip switch on the driver
- Double insulated
- IES files available

EMERGENCY VERSIONS:

- 3 hour maintained mode as standard which can also be configured for non maintained operation
- Battery - Li-Ion 3.2V 1500mAh • Battery 1 year warranty - Replacement battery code: EB11

STEP DIM MICROWAVE VERSIONS:

- Daylight Sensor adjustable: 10 lux / disable • Detection Sensitivity adjustable: 50% / 100%
- Detection angle: 30~150° • Adjustable detection range: 4-6m at 3m installation height

Standard on/off mode:


- Operation at 100% light level then off after last presence detection. Operation on time can be set at 5 sec, 90 sec, 3 min (180 sec), 10 min

Corridor mode:

- Operation at 100% light level after last presence detection which can be set at 5 sec, 90 sec, 3 min (180 sec), 10 min, then continuous operation at 10% or 30% light level

Corridor & off mode:

- Operation at 100% light level after last presence detection which can be set at 5 sec, 90 sec, 3 min (180 sec), 10 min, then operation at 10% or 30% light level which can be set at 10 sec / 10 min, then off



Code	Version	Colour Temp.	Lumens			Avg. Rated Life (Hrs)	IP / IK Rating	MOM / OPQ
			9W	14W	18W			
CIRCULAR OPAL DIFFUSER								
OPCIRSTD	Standard							
OPCIRMW	SD	3000K	1090 lm	1610 lm	1970 lm	50,000 hrs	IP65 IK08	1 / 8
		4400K	1160 lm	1770 lm	2190 lm			
		6500K	1130 lm	1700 lm	2080 lm			
OPCIREM3	EM3							
OPCIRMW3	SD + EM3							
CIRCULAR PRISMATIC DIFFUSER								
PRCIRSTD	Standard							
PRCIRMW	SD	3000K	1180 lm	1715 lm	2055 lm	50,000 hrs	IP65 IK08	1 / 8
		4400K	1270 lm	1890 lm	2270 lm			
		6500K	1230 lm	1780 lm	2180 lm			
PRCIREM3	EM3							
PRCIRMW3	SD + EM3							
SQUARE OPAL DIFFUSER								
OPSQSTD	Standard							
OPSQMW	SD	3000K	1080 lm	1630 lm	1980 lm	50,000 hrs	IP65 IK08	1 / 8
		4400K	1150 lm	1770 lm	2200 lm			
		6500K	1120 lm	1700 lm	2070 lm			
OPSQEM3	EM3							
OPSQMW3	SD + EM3							
SQUARE PRISMATIC DIFFUSER								
PRSQSTD	Standard							
PRSQMW	SD	3000K	1150 lm	1730 lm	2100 lm	50,000 hrs	IP65 IK08	1 / 8
		4400K	1250 lm	1870 lm	2360 lm			
		6500K	1200 lm	1830 lm	2200 lm			
PRSQEM3	EM3							
PRSQMW3	SD + EM3							



FRESH PRINCE CIRCULAR / SQUARE LED UTILITY FITTINGS & LI-ION EMERGENCY VERSIONS



5
Year Warranty



Emergency
Product



Li-Ion Battery



IP65



IK08



Microwave
Sensor



High output, energy saving utility LED wall / ceiling fixtures with standard, emergency & multi-function microwave control versions. Both opal & prismatic versions are available for either smooth diffused effect or maximum light output. Diffusers are supplied not fitted to bases and fully captive diffuser fixing screws are utilised to save installation time. Multi-function microwave versions provide the best in flexibility & energy saving options

- Polycarbonate construction • Push fit terminals • Full circular / square LED array • Hinged gear tray
- Captive fixing screws • Four 20mm cable entries on the side and one to the rear
- Earthed • IES files available

EMERGENCY VERSIONS:


- 3 hour maintained mode as standard which can also be configured for non maintained operation
- Battery - Li-Ion 3.2V 1500mAh • Battery 1 year warranty - Replacement battery code: EB11

MULTI-FUNCTION MICROWAVE SENSOR VERSIONS:

- Detection sensitivity adjustable - 10/50/75/100% • Daylight sensor adjustable - 5/15/50 Lux/Disable
- Mounting height - maximum 6m • Detection zone - maximum 16m diameter x 6m height
- Detection angle - 150° (wall mounted), 360° (ceiling mounted)


MULTI-FUNCTION MICROWAVE SENSOR WITH 3 INSTALLER OPTIONS:

- **Standard On/Off Mode:** operation at 100% light level then off after last presence detection. Operation on time can be set at 5 seconds/90 seconds/3 minutes/10 minutes
- **“Corridor Mode”:** operation at 100% light level after last presence detection which can be set at 5 seconds/90 seconds/3 minutes/10 minutes, then continuous operation at 10% light level
- **“Corridor” & Off Mode:** operation at 100% light level after last presence detection which can be set at 5 seconds/90 seconds/3 minutes/10 minutes, then operation at 10% light level which can be set at 30 seconds or 10 minutes, then off




Code	Version	Wattage	Colour Temp.	Diffuser / Lumens	Avg. Rated Life (Hrs)	IP / IK Rating	MOM / OPQ
CIRCULAR FITTINGS							
CIROPALSTD	Standard	18W	4000K	Opal 1400 lm	35,000 hrs	IP65 IK08	1 / 1
CIROPALMW	MW						
CIROPALM3	EM3						
CIROPALMW3	MW + EM3			Prismatic 1600 lm			
CIRPRISSTD	Standard						
CIRPRISMW	MW						
CIRPRISEM3	EM3						
CIRPRISMW3	MW + EM3						
SQUARE FITTINGS							
SQOPALSTD	Standard	18W	4000K	Opal 1400 lm	35,000 hrs	IP65 IK08	1 / 1
SQOPALMW	MW						
SQOPALM3	EM3						
SQOPALMW3	MW + EM3			Prismatic 1600 lm			
SQPRISSTD	Standard						
SQPRISMW	MW						
SQPRISEM3	EM3						
SQPRISMW3	MW + EM3						

CEILING/WALL/BULKHEADS

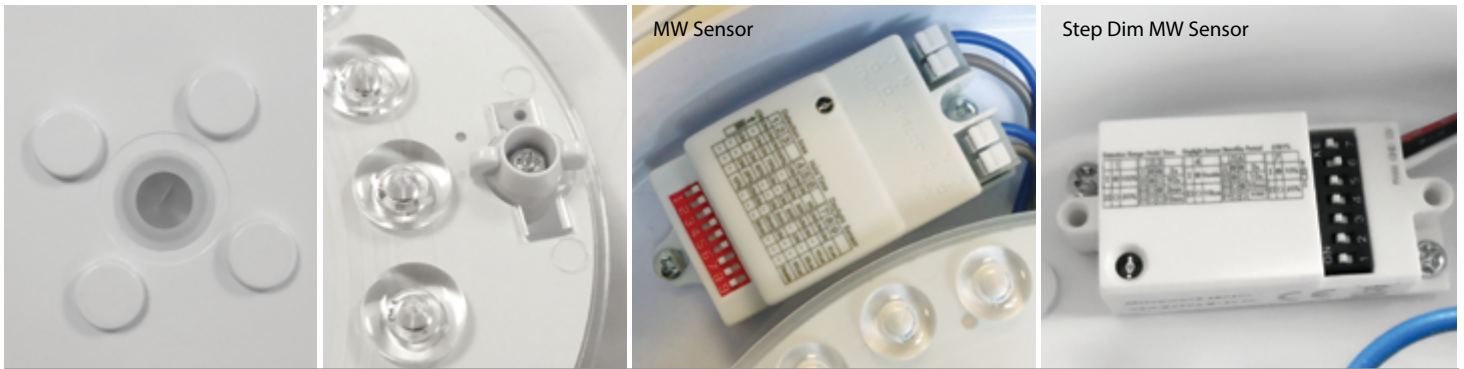

CHARA POWER AND COLOUR TEMPERATURE SELECTABLE CIRCULAR LED CEILING/WALL LIGHTS & LI-ION EMERGENCY VERSIONS

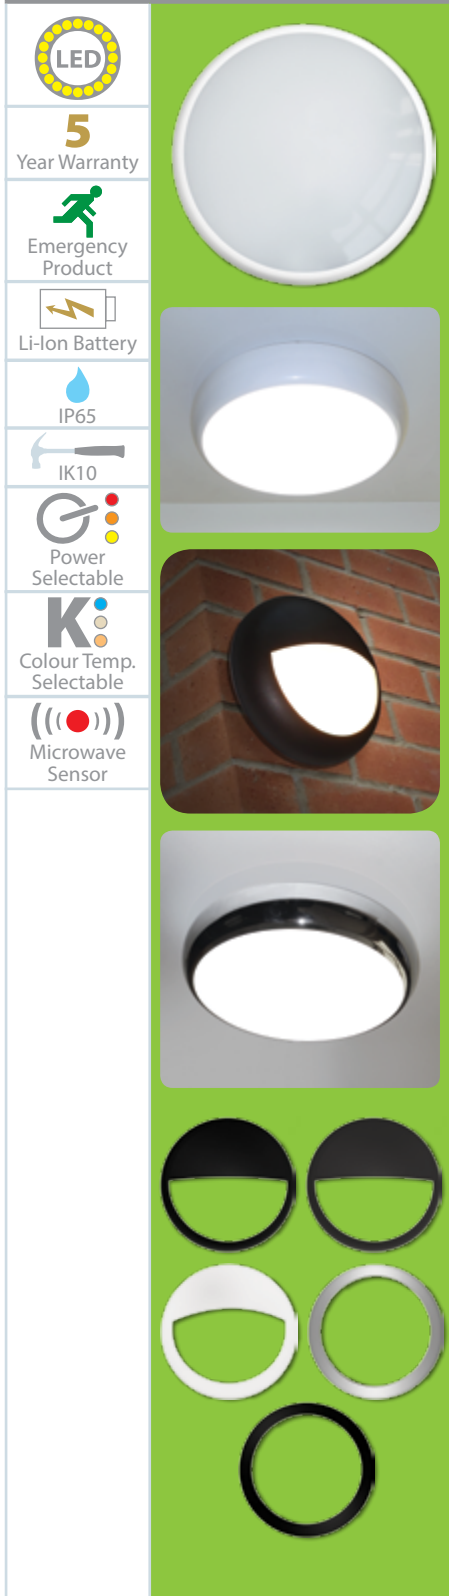

Offering 3 selectable power levels and 3 selectable colour temperatures, this versatile range offers the ultimate in practicality and multiple options from a single product. Suitable for interior or exterior installation the range of accessories ensures suitability for functional or decorative applications V1

- All fittings come with a white full trim • Hinged LED array • Push fit terminal block • Polycarbonate diffuser
- Optional accessories available separately: black, white and grey eyelid trims or full chrome trim
- Power Selectable - options of 9W, 14W and 18W easily set by a dip switch on the driver
- Colour temperature selectable - options of 3000K, 4400K & 6500K easily set by a dip switch on the driver
- Enclosure rated as IK10 for impact resistance • Central BESA box mounting option on the base
- Double insulated • IES files available

EMERGENCY VERSIONS:

- 3 hour maintained mode as standard which can also be configured for non maintained operation
- Battery - Li-Ion 3.2V 1500mAh • Battery 1 year warranty - Replacement battery code: EB11

STANDARD ON/OFF MICROWAVE SENSOR VERSIONS:

- Adjustable detection angle: up to 150° • Adjustable detection range: Max. 4-6m at 3m installation height
- Adjustable time setting: 5 seconds - 30 minutes • Adjustable Lux control: 2/10/25/50 lux or disable
- Detection is possible through doors, glass panels & thin walls

STEP DIM MICROWAVE VERSIONS:

- Daylight Sensor adjustable: 10 lux / disable • Detection Sensitivity adjustable: 50% / 100%
- Detection angle: 30~150° • Adjustable detection range: 4-6m at 3m installation height

Standard on/off mode:


- Operation at 100% light level then off after last presence detection. Operation on time can be set at 5 sec, 90 sec, 3 min (180 sec), 10 min

Corridor mode:

- Operation at 100% light level after last presence detection which can be set at 5 sec, 90 sec, 3 min (180 sec), 10 min, then continuous operation at 10% or 30% light level

Corridor & off mode:

- Operation at 100% light level after last presence detection which can be set at 5 sec, 90 sec, 3 min (180 sec), 10 min, then operation at 10% or 30% light level which can be set at 10 sec / 10 min, then off



Code	Version	Colour Temp.	Lumens			Avg. Rated Life (Hrs)	IP / IK Rating	MOM / OPQ
			9W	14W	18W			
CHA18STD	Standard	3000K 4400K 6500K	1000 lm 1100 lm 1100 lm	1500 lm 1670 lm 1640 lm	1880 lm 2130 lm 2050 lm	40,000 hrs	IP65 IK10	1 / 10
CHA18MW	MW							
CHA18EM3	EM3							
CHA18MW3	MW + EM3							
CHA18SD	SD							
CHA18SDM3	SD + EM3							
CHAEYEBK	Black Eyelid Trim							1 / 1
CHAEYEGY	Grey Eyelid Trim							
CHAEYEWB	White Eyelid Trim							
CHAFULLBK	Black Full Trim							
CHAFULLCR	Chrome Full Trim							


CEILING/WALL/BULKHEADS



**POWER & COLOUR
TEMPERATURE
SELECTABLE
UTILITY FITTINGS
NOW AVAILABLE
FROM ETERNA**
LOOK OUT FOR THE ICONS (RIGHT)



CHARA COLOUR TEMPERATURE SELECTABLE CIRCULAR LED CEILING/WALL LIGHTS & LI-ION EMERGENCY VERSIONS

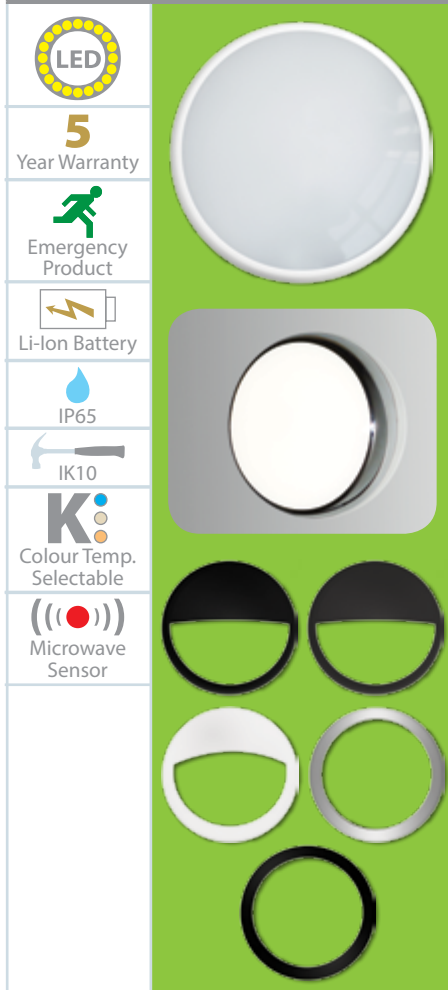

- Polycarbonate diffuser
- Hinged LED array • Push fit terminal block • All fittings come with a white full trim
- Colour temperature selectable - options of 3000K, 4200K & 6000K easily set by a dip switch on the driver
- Enclosure rated as IK10 for impact resistance • Central BESA box mounting option on the base
- Double insulated • IES files available


V2

EMERGENCY VERSIONS:

- 3 hour maintained mode as standard which can also be configured for non maintained operation
- Battery - Li-Ion 3.2V 1500mAh • Battery 1 year warranty - Replacement battery code: EB11

MICROWAVE SENSOR VERSION:

- Rated Load - 800W (resistive), 400W (inductive), 270W (LED) • Adjustable detection angle: up to 150°
- Power consumption: <0.5W • Adjustable detection range: Max. 6m
- Adjustable time setting: 5 seconds - 30 minutes
- Adjustable Lux control: 2-50 lux
- Push connect terminals: for ease of connection



Code	Version	Wattage	Colour Temp.	Lumens	Avg. Rated Life (Hrs)	IP / IK Rating	MOM / OPQ
KCIRSTD	Standard	14W	3000K 4200K 6000K	1560 lm 1670 lm 1600 lm	50,000 hrs	IP65 IK10	1 / 10
KCIRMW	MW						
KCIREM3	EM3						
KCIRMW3	MW + EM3						
KCIREYEBK	Black Eyelid Trim						1 / 1
KCIREYEGY	Grey Eyelid Trim						
KCIREYEW	White Eyelid Trim						
KCIRFULLBK	Black Full Trim						
KCIRFULLCR	Chrome Full Trim						

CARINA SLIMLINE LED CEILING/WALL FITTINGS




More compact, lower power version of our hugely popular Carina range. Ideal where a discreet appearance is required

V1

- Full circular LED array & optically optimised diffuser • Ceiling or wall mounted
- Push fit terminal block & gear tray retaining strap for quick and easy installation
- Double insulated • IES files available


MICROWAVE SENSOR VERSIONS:

- Ambient light level adjustment 2-50 lux or disable
- Detection range 10-100% • Time on 5 secs-15 mins



Code	Version	Wattage	Colour Temp.	Lumens	Avg. Rated Life (Hrs)	IP Rating	MOM / OPQ
CFLEDMINSC	Standard	9W	4200K	875 lm	40,000 hrs	IP65	1 / 10
MSLEDMINSC	MW						

CARINA LED COLOUR SELECTABLE FITTINGS & LI-ION EMERGENCY VERSIONS

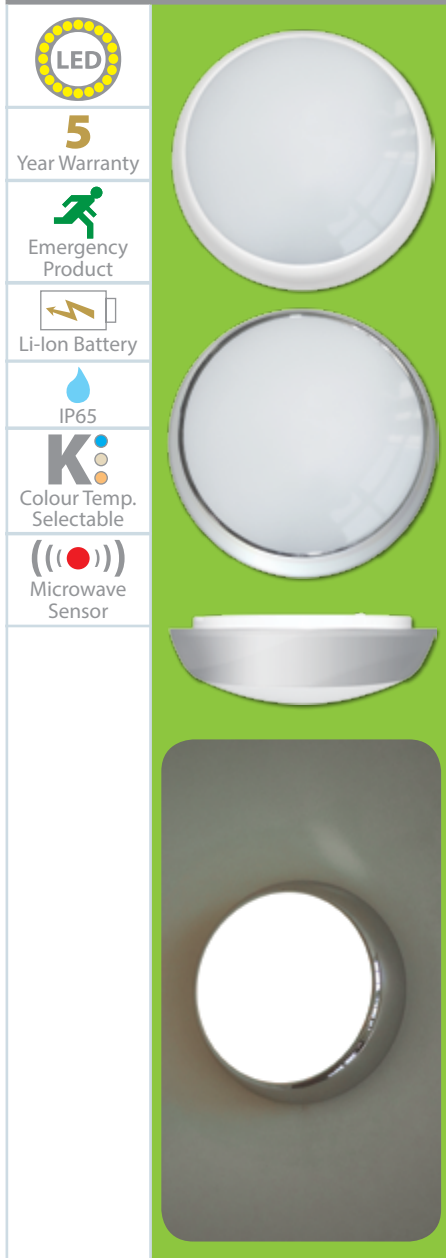

- LED
- 5 Year Warranty
- Emergency Product
- Li-Ion Battery
- IP65
- Colour Temp. Selectable
- Microwave Sensor

Versatile range of decorative bulkheads, offering practicality and style with multiple functional options

V1

- Polycarbonate construction • Full circular LED array • IP65, ceiling or wall mounted
- Colour temperature selectable - options of 3100K, 4200K & 6400K easily set by a dip switch on the gear tray
- Plug in connector between the terminal block and the gear tray. Terminal block is located on the base, allowing for easy wiring and the gear tray to be removed during installation
- Double insulated • IES files available

EMERGENCY VERSIONS:


- 3 hour maintained mode as standard which can also be configured for non maintained operation
- Battery - Li-Ion 3.2V 1500mAh • Battery 1 year warranty - Replacement battery code: EB11

MICROWAVE SENSOR VERSIONS:

- Adjustable microwave sensor: with options to adjust 2-50 lux or disable, detection range 10-100% and time 5 secs - 15 mins
- The microwave sensor is discreetly placed behind the diffuser: making it unobtrusive so there is no compromise to the appearance of the fitting or the room design

10% STEP DIM MICROWAVE SENSOR VERSIONS:

- Operation at 100% light level after last presence detection, reducing to 10% light output after installer selected time delay
- Delay time to 10% operation adjustable: 5 sec / 30 sec / 1 min / 5 min / 15 min / 30 min
- 30~150° detection angle
- 12~18m adjustable detection range: 100% / 75% / 50% / 25% / 10%
- Detection is possible through doors, glass panels and thin walls



Code	Colour	Version	Wattage	Colour Temp.	Lumens	Avg. Rated Life (Hrs)	IP Rating	MOM / OPQ
CSLEDCR	Chrome	Standard	17W	3100K 4200K 6400K	1250 lm 1350 lm 1300 lm	35,000 hrs	IP65	1 / 8
CSLEDWH	White							
CSLEDCREM3	Chrome	EM3						
CSLEDWHEM3	White							
MSCSLEDCR	Chrome	MW						
MSCSLEDWH	White							
MSCSLCREM3	Chrome	MW + EM3						
MSCSLWHEM3	White							
SDCSLEDCR	Chrome	SD						
SDCSLEDWH	White							
SDCSLCREM3	Chrome	SD + EM3						
SDCSLWHEM3	White							

CARINA LED CEILING/WALL LIGHTS & LI-ION EMERGENCY VERSIONS



- LED
- 5 Year Warranty
- Emergency Product
- Li-Ion Battery
- IP65
- Microwave Sensor

- Polycarbonate construction • Visually similar, energy efficient alternative to 28W 2D fittings
- Multiple low power LED array & optically optimised diffuser: ensures a soft lighting effect with no degradation of light output
- Earthed • IES files available


V2

EMERGENCY VERSIONS:

- 3hr maintained emergency lighting: also available in non-emergency options
- Facility for non-maintained mode
- Battery - Li-Ion 3.2V 1500mAh • Battery 1 year warranty - Replacement battery code: EB11

MICROWAVE SENSOR VERSIONS:

- Adjustable detection angle: up to 150° • Adjustable detection range: Max. 4-6m at 3m installation height
- Adjustable time setting: 5 seconds - 30 minutes • Adjustable Lux control: 2/10/25/50 lux or disable
- Detection is possible through doors, glass panels & thin walls



Code	Version	Wattage	Colour Temp.	Lumens	Avg. Rated Life (Hrs)	IP Rating	MOM / OPQ
CFLEDWHSC	Standard	17W	4000K	1843 lm	50,000 hrs	IP65	1 / 8
MSLEDWHSC	MW						
CFLWHEM3SC	EM3						
MSLWHEM3SC	MW + EM3						

CEILING/WALL/BULKHEADS



Photocell



CO18 shown with prismatic diffuser CPRIS



CHAMELEON IP65 CIRCULAR LED MODULAR FITTINGS & LI-ION EMERGENCY VERSIONS



5 Year Warranty



Emergency Product



Li-Ion Battery



IP65



IK08



Colour Temp. Selectable



Microwave Sensor



Photocell



A flexible range of LED wall/ceiling fittings with standard, emergency, microwave, microwave emergency and photocell variants. The ability to easily choose the colour temperature to suit the installation is complimented with the accessories available. The accessories enable you to transform the fittings from utility to decorative. Along with different colour options to suit the application as required

- Polycarbonate diffuser • Circular LED array • Push fit terminal block • Stainless steel captive fixing screws
- Colour temperature selectable - options of 3100K, 4200K & 6400K easily set by dip switches
- Four 20mm cable entries on the side and one to the rear • Double insulated • IES files available

EMERGENCY VERSIONS:


- 3 hour maintained mode as standard which can also be configured for non maintained operation
- Battery - Li-Ion 3.2V 1500mAh • Battery 1 year warranty - Replacement battery code: EB11

PHOTOCELL VERSIONS:

- Photocell for dusk to dawn operation • Photocell version cannot be used with any of the trims

MICROWAVE SENSOR VERSIONS:

- Adjustable microwave sensor: with options to adjust 2-50 lux or disable, detection range 10-100% and time 5 secs - 15 mins
- The microwave sensor is discreetly placed behind the diffuser: making it unobtrusive so there is no compromise to the appearance of the fitting or the room design



Code	Version	Wattage	Colour Temp.	Lumens	Avg. Rated Life (Hrs)	IP / IK Rating	MOM / OPQ
12W Single Colour Temperature							
CO12SCPC	Photocell	12W	4200K	1200 lm	35,000 hrs	IP65 IK08	1 / 10
12W Colour Temperature Selectable							
CO12	Standard	12W	3100K 4200K 6400K	1180 lm 1290 lm 1230 lm	40,000 hrs	IP65 IK08	1 / 10
CO12EM3	EM3						
CO12MW	MW						
CO12MW3	MW + EM3						
CO12PC	Photocell						
18W Colour Temperature Selectable							
CO18	Standard	18W	3100K 4200K 6400K	1580 lm 1640 lm 1600 lm	35,000 hrs	IP65 IK08	1 / 10
CO18EM3	EM3						
CO18MW	MW						
CO18MW3	MW + EM3						
CO18PC	Photocell						
Accessories							
GRILLWH	White Grill Trim						1 / 50
GRILLBK	Black Grill Trim						
EYEWLH	White Eyelid Trim						
EYEBK	Black Eyelid Trim						
CIRCWH	White Full Trim						
CIRCBK	Black Full Trim						
CIRCCR	Chrome Full Trim						
CPRIS	Prismatic Diffuser						


CASSI LED CEILING/WALL FITTINGS



5 Year Warranty




- Polycarbonate diffuser • IES files available
- Stainless Steel captive fixing screws
- 20mm cable entry on back of fitting
- Push fit terminal block • Double insulated



V1

Code	Colour	Version	Wattage	Colour Temp.	Lumens	Avg. Rated Life (Hrs)	IP / IK Rating	MOM / OPQ
KCAS8WHFL	White	Full Diffuser	8W	4000K	855 lm	30,000 hrs	IP54 IK08	1 / 40
KCAS8BKFL	Black							
KCAS14WHFL	White							
KCAS14BKFL	Black	Louvered Trim	14W	4000K	1480 lm	30,000 hrs	IP54 IK08	1 / 20
KCAS14WHLV	White							
KCAS14BKLV	Black							

SPARROWHAWK STANDARD / EYELID LED DIFFUSER AMENITY CEILING/WALL LIGHTS

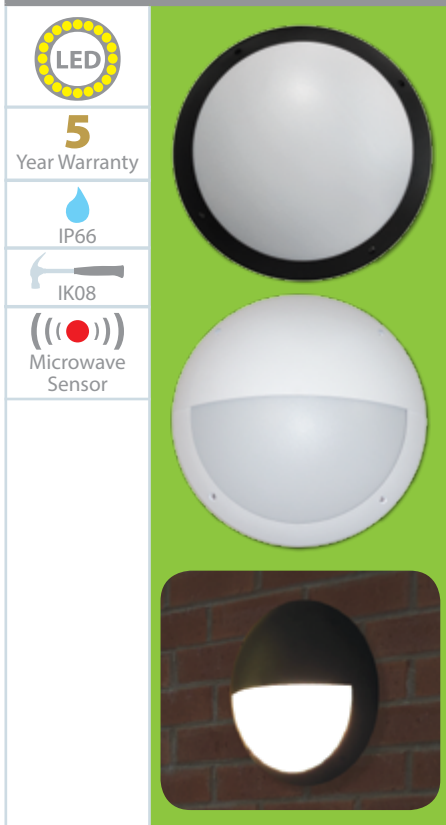


5 Year Warranty



Long life, energy efficient utility fitting perfect for domestic or commercial settings including perimeter lighting, paths, gardens and porches, communal areas, staircases and many more

- Polycarbonate / ABS construction • Stainless steel screws • IP66 ceiling or wall mounted
- Multiple low power LED array & optically optimised diffuser: ensures a soft, even lighting effect with no degradation of light output
- 4200K colour temperature: for bright neutral white appearance
- Double insulated • IES files available



V2

MICROWAVE VERSIONS:

- Adjustable microwave sensor: with options to adjust 2-50 lux or disable, detection range 10-100% and time 5 secs - 30 mins
- The microwave sensor is discreetly placed behind the diffuser: making it unobtrusive so there is no compromise to the appearance of the fitting or the room design

Code	Colour	Diffuser	Wattage	Colour Temp.	Lumens	Avg. Rated Life (Hrs)	IP / IK Rating	MOM / OPQ
Standard								
SHFULLBK	Black	Full	12W	4200K	800 lm	25,000 hrs	IP66 IK08	1 / 10
SHFULLWH	White							
SHEYBK	Black	Eyelid	12W	4200K	800 lm	25,000 hrs	IP66 IK08	1 / 10
SHEYWH	White							
Microwave								
SHFULLMWBK	Black	Full	12W	4200K	800 lm	25,000 hrs	IP66 IK08	1 / 10
SHFULLMWWH	White							
SHEYMWBK	Black	Eyelid						

SPARROWHAWK MINI LED AMENITY FITTINGS




5 Year Warranty



Long life, energy efficient utility fitting perfect for domestic or commercial settings including pathway illumination, gardens and porches, staircases and many more

- Polycarbonate construction • Instant start to full illumination level • Stainless steel screws
- Multiple low power LED array & optically optimised diffuser: ensures a soft, even lighting effect with no degradation of light output
- 4200K colour temperature: for bright neutral white appearance
- IP66 ceiling or wall mounted: giving versatile fixing options suitable for bathroom, internal and external use
- Double insulated




V2

Code	Colour	Diffuser	Wattage	Colour Temp.	Lumens	Avg. Rated Life (Hrs)	IP / IK Rating	MOM / OPQ
MINIFULLWH	White	Full	6W	4200K	530 lm	50,000 hrs	IP66 IK08	1 / 10
MINIEYBK	Black	Eyelid			445 lm			

LED ALUMINIUM WALL LIGHTS & LI-ION EMERGENCY VERSIONS

V1

-  LED
-  5 Year Warranty
-  Emergency Product
-  Li-Ion Battery
-  IP65
-  IK10
-  Microwave Sensor

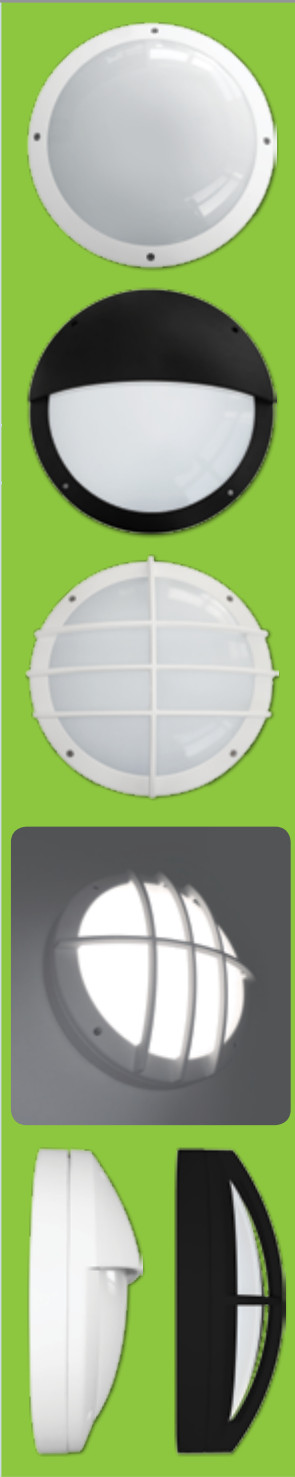

Superior range of die-cast aluminium fittings offering multiple functions and trim options suitable for outdoor applications where performance, style and durability are required. Modern and robust design with options

- Die-cast aluminium base and bezel • Polycarbonate diffuser • Full circular/eyelid LED array
- Plug in connector between the terminal block and the gear tray. Terminal block is located on the base, allowing for easy wiring and the gear tray to be removed during installation • IES files available
- Four 20mm cable entries • Tamper-proof, captive, stainless steel allen key screws • Earthed

EMERGENCY VERSIONS:


- 3 hour maintained mode as standard which can also be configured for non-maintained operation
- Battery - Li-Ion 3.2V 1500mAh • Battery 1 year warranty - Replacement battery code: EB11

MULTI-FUNCTION MICROWAVE SENSOR VERSIONS:

- Detection sensitivity adjustable - 10/50/75/100% • Daylight sensor adjustable - 5/15/50 Lux/Disable
- Mounting height - maximum 6m • Detection zone - maximum 16m diameter x 6m height
- Detection angle - 150° (wall mounted), 360° (ceiling mounted)

MULTI-FUNCTION MICROWAVE SENSOR WITH 3 INSTALLER OPTIONS:

- **Standard On/Off Mode:** operation at 100% light level then off after last presence detection. Operation on time can be set at 5 seconds/90 seconds/3 minutes/10 minutes
- **“Corridor Mode”:** operation at 100% light level after last presence detection which can be set at 5 seconds/90 seconds/3 minutes/10 minutes, then continuous operation at 10% light level
- **“Corridor” & Off Mode:** operation at 100% light level after last presence detection which can be set at 5 seconds/90 seconds/3 minutes/10 minutes, then operation at 10% light level which can be set at 30 seconds or 10 minutes, then off



Code	Colour	Version	Wattage	Colour Temp.	Lumens	Avg. Rated Life (Hrs)	IP / IK Rating	MOM / OPQ
Full Trim								
ALMFWHFUL	White	MW	18W	4200K	1400 lm	35,000 hrs	IP65 IK10	1 / 1
Eyelid Trim								
ALSTDWHEYE	White	Standard	18W	4200K	1300 lm	35,000 hrs	IP65 IK10	1 / 1
ALMFWHEYE	White	MW						
ALMF3WHEYE	White	MW + EM3						
Grill Trim								
ALSTDBKGRI	Black	Standard	18W	4200K	1400 lm	35,000 hrs	IP65 IK10	1 / 1
ALSTDWHGRI	White							
ALEM3WHGRI	White	EM3						
ALMFBKGRI	Black	MW						
ALMFWHGRI	White							
ALMF3BKGRI	Black	MW + EM3						
ALMF3WHGRI	White							

POLISHED CHROME IP44 LED CEILING/WALL LIGHT


V1

-  LED
-  5 Year Warranty
-  IP44
-  Bathroom Zone 2



This stylish fitting is ideal for installation in a multitude of situations. Ceiling or wall mounted in a domestic or commercial setting and suitable for bathrooms. Long life, energy efficient alternative to traditional fluorescent luminaires

- Steel construction • Polished chrome finish • Corrosion resistant stainless steel fixing screws
- Multiple low power LED array & optically optimised diffuser: ensures a soft, even lighting effect with no degradation of light output
- Suitable for bathroom use • Push fit terminals
- 3100K warm colour temperature: offering a pleasing light appearance
- Earthed



Code	Wattage	Colour Temp.	Lumens	Avg. Rated Life (Hrs)	IP Rating	MOM / OPQ
PACIFIC12	12W	3100K	800 lm	30,000 hrs	IP44	1 / 5

CEILING/WALL/BULKHEADS

LED COLOUR TEMPERATURE SELECTABLE SLIM WALL PACKS



5
Year Warranty



IP65



Colour Temp. Selectable




Photocell

Slim profile, durable and high performance colour selectable wall pack offering reliability for outdoor utility applications

V1

- Colour temperature selectable - options of 3000K, 4000K & 6000K easily set by a dip switch on the driver • Up to 90 lm/W
- ABS base and polycarbonate diffuser • Slim design
- Opal diffuser: evenly diffused light output • Double insulated
- 20mm cable entries on either side and one to the rear • IES files available



PHOTOCELL VERSIONS: Photocell for dusk to dawn operation

Code	Colour	Version	Wattage	Colour Temp.	Lumens	Avg. Rated Life (Hrs)	IP Rating	MOM / OPQ
WPCSBK	Black	Standard	17W	3000K 4000K 6000K	1500 lm	36,000 hrs	IP65	1 / 10
WPCSWH	White				1550 lm			
WPCSBKPC	Black	Photocell			1530 lm			
WPCSWHPC	White							

LED BULKHEADS



5
Year Warranty



IP65




Photocell

Robustly constructed, reliable wall fitting offering more discreet illumination for utility applications

V1

- Tough polycarbonate housing • Hinged diffuser
- Opal diffuser: evenly diffused light output
- Corrosion resistant stainless steel cover fixing screws
- Cable channel on reverse of fitting with 20mm knockout conduit entries
- Double insulated • IES files available



BULKLEDPC: Integral photocell: automatic dusk to dawn operation

Code	Version	Wattage	Colour Temp.	Lumens	Avg. Rated Life (Hrs)	IP Rating	MOM / OPQ
BULKLED	Standard	11.2W	6500K	900 lm	30,000 hrs	IP65	1 / 12
BULKLEDPC	Photocell						

INTEGRATED LED BULKHEADS



5
Year Warranty



IP65



IK08




Photocell

Robustly constructed & suitable for multiple commercial use where performance and functionality are required

V1

- Captive stainless steel screws • Tough polycarbonate housing
- 20mm knockouts side and rear • Earthed
- IES files available



PHOTOCELL VERSION: photocell for dusk to dawn operation

Code	Version	Wattage	Colour Temp.	Lumens	Avg. Rated Life (Hrs)	IP / IK Rating	MOM / OPQ
WPACKLED	Standard	30W	4200K	2000 lm	30,000 hrs	IP65 IK08	1 / 4
WPACKLEDPC	Photocell						

BULKHEAD WITH 120° PIR



1
Year Warranty



IP44




120° PIR

- ABS construction
- Requires suitable BC energy saving lamp (not included). Fitting is rated at 60W max
- Vertically & horizontally adjustable detector • 12 metre range • 120° detection zone
- Time on adjustable (10±5) sec - (4±1) min • Factory preset PIR - no override facility
- Adjustable LUX level • Earthed

V1

Code	Wattage	IP Rating	MOM / OPQ
PIR80BK	60W Max	IP44	1 / 20



CEILING/WALL/BULKHEADS



LED BULKHEADS



5
Year Warranty




IP44
120° PIR

Energy efficient LED alternative to traditional bulkheads with PIR option that offers durability for domestic and light commercial applications

- Tough polycarbonate housing • Double insulated

PIR VERSION:

- Time on adjustment 5 secs - 5 mins • Lux level adjustments
- 120° detection angle • 8 metre detection range



Code	Version	Wattage	Colour Temp.	Lumens	Avg. Rated Life (Hrs)	IP Rating	MOM / OPQ
BLEDBK	Standard	7W	3100K	500 lm	35,000 hrs	IP44	1 / 10
BLEDPIRBK	120° PIR						

LED BULKHEADS WITH OPAL DIFFUSER



5
Year Warranty




IP65
Photocell

Highly efficient 104 lm/W, super bright general purpose bulkhead

- Tough polycarbonate construction • Opal diffuser • Double insulated
- Three 20mm knock-out conduit entry positions, one each end and one on rear

KRECBOLPC: Integral photocell: automatic dusk to dawn operation



Code	Version	Wattage	Colour Temp.	Lumens	Avg. Rated Life (Hrs)	IP Rating	MOM / OPQ
KRECBOL	Standard	10W	4000K	1045 lm	40,000 hrs	IP65	1 / 10
KRECBOLPC	Photocell						

ATOM LED BULKHEAD




5
Year Warranty



IP65

Highly cost effective, compact, ultra low energy, modern design utility bulkhead

- Instant start to full illumination level: giving crisp, super bright light output
- Polycarbonate construction: impact and corrosion resistant
- External fixing points: for quick & easy installation
- 3 x 20mm cable entries: offering multiple installation options
- Compact design • Double insulated



Code	Wattage	Colour Temp.	Lumens	Avg. Rated Life (Hrs)	IP Rating	MOM / OPQ
ATOM5	6W	4200K	450 lm	25,000 hrs	IP65	1 / 20

BULKHEAD WITH E27 LAMPHOLDER



1
Year Warranty




IP65



IK08

- Requires 1 x suitable E27 lamp (not included). Fitting is rated at 100W max
- Easy connection directly into the lampholder
- Polycarbonate and ABS construction: impact and corrosion resistant
- Pre-formed 20mm cable entry knockouts on each end and one on rear
- IP65 - suitable for internal and external use
- Double insulated



Code	Wattage	IP / IK Rating	MOM / OPQ
BH100E27	100W Max	IP65 / IK08	1 / 10

CEILING/WALL/BULKHEADS

SURFACE LED WALL LIGHTS



5

Year Warranty



IP65



160° PIR




- Polycarbonate construction suitable for coastal areas • Opal diffuser • Integral driver • Double insulated
- Downward facing opal diffuser gives a pleasing wall washed effect • IES files available

V1

PIR VERSIONS:

- PIR Time on adjustment 5 secs - 8 mins • 160° detection angle
- 8 meter detection range
- Lux level adjustments - option for day and night time operation or night time operation only



Code	Colour	Version	Wattage	Colour Temp.	Lumens	Avg. Rated Life (Hrs)	IP Rating	MOM / OPQ
VECOWLW	White	Standard	6W	4000K	340 lm	30,000 hrs	IP65	1 / 20
VECOWLG	Grey							
VECOWLPIRW	White	160° PIR						
VECOWLPIRG	Grey							

LED SLIM SURFACE BRICKLIGHT



5

Year Warranty




IP65



Superslim surface mounting mains voltage LED amenity fixtures for garden and path illumination, which offers a fantastic alternative to traditional bricklights without the hassle of recessed installation

V1

- ABS housing, polycarbonate diffuser
- Double insulated
- IES files available



Code	Wattage	Colour Temp.	Lumens	Avg. Rated Life (Hrs)	IP Rating	MOM / OPQ
SLICELONG	3W	4000K	188 lm	30,000 hrs	IP65	1 / 24
TRIMLONG	White Trim					

LED RECESSED BRICKLIGHT WITH STAINLESS STEEL FRAME



5

Year Warranty




IP65



A modern design that gives an instant cool white light. Ultra low energy consumption and prolonged lamp life

V1

- Polycarbonate construction • Integral driver • Cable gland included
- Opal diffuser with optional stainless steel frame offering a soft, stylish lighting effect • Double insulated
- Hole cut out size: L: 228mm, D: 75mm, H: 98mm



Code	Wattage	Colour Temp.	Lumens	Avg. Rated Life (Hrs)	IP Rating	MOM / OPQ
BRICKLED	5.4W	6000K	280 lm	20,000 hrs	IP65	1 / 6

LED CORNER FIXTURE RANGE



5

Year Warranty



IP65



120° PIR




Flexible and decorative range of fittings ideally suited for outdoor applications requiring corner lights

V1

- Complete solution for flat wall or corner mounting: bracket included for optional corner mounting
- Double insulated

PIR VERSION:

- Factory preset 120° PIR • 10 lux - 7 minutes duration
- No override facility

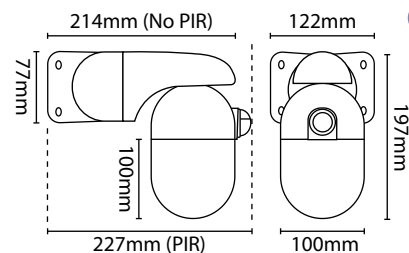

Code	Colour	Version	Wattage	Colour Temp.	Lumens	Avg. Rated Life (Hrs)	IP Rating	MOM / OPQ
WELLWHSTD	White	Standard	10W	4000K	660 lm	25,000 hrs	IP65	1 / 6
WELLBKSTD	Black							
WELLWHPIR	White	120° PIR						
WELLBKPIR	Black							

CEILING/WALL/BULKHEADS


LED CORNER FIXTURE RANGE



5
Year Warranty



- This luminaire is supplied with a 9W LED ES (E27) 'A' Shape lamp – maximum 23W
- Bracket included for optional corner mounting: complete solution for flat wall or corner mounting
- Aluminium alloy construction in white or black finish with white polycarbonate diffuser
- Low energy consumption and prolonged lamp life • BESA box mounting
- Lamp included - 1 year warranty • Earthed



V3


Code	Colour	Wattage	Colour Temp.	Lumens	Avg. Rated Life (Hrs)	IP Rating	MOM / OPQ
WGLEDBK	Black	8.9W	2700K	810 lm	15,000 hrs	IP65	1 / 4
WGLEDWH	White						
WELLDIFF	White Replacement Polycarbonate Diffuser						1 / 1

EXTERNAL STAINLESS STEEL WALL LIGHTS

1
Year Warranty



- Requires: 1 x 35W Max. 240V GU10 halogen or LED lamp per lampholder (not included)
- Stainless steel construction
- Modern attractive design
- Easy lamp change
- Fully adjustable head (SSWLDIR only)
- Earthed

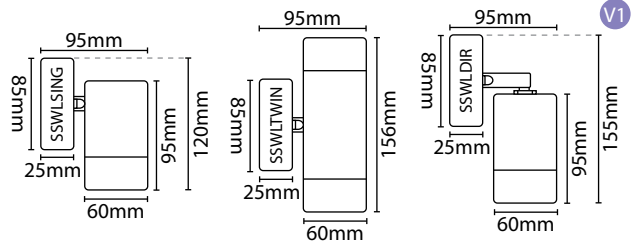

V1


Code	Version	Wattage	IP Rating	MOM / OPQ
SSWLSING	Single Up Or Down Lighting	35W Max	IP44	1 / 12
SSWLTWIN	Twin Up & Down Lighting			
SSWLDIR	Single Directional Lighting			

EXTERNAL AMENITY WALL LIGHTS

1
Year Warranty



- Polypropylene construction
- Requires 1 or 2 x GU10 LED lamps (max 7W per lampholder)
- Double insulated

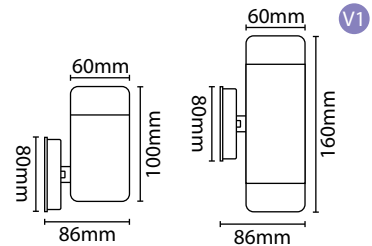

V1

Code	Version	Wattage	IP Rating	MOM / OPQ
WLPPSING	Single Up Or Down Plastic Wall Light	7W Max	IP44	1 / 16
WLPPTWIN	Twin Up & Down Plastic Wall Light			


SEE PAGE 69 FOR OUR INTERNAL SPOTLIGHTING RANGE

CERAMIC UPLIGHTER

1
Year Warranty



- Requires 1 x suitable BC energy saving lamp (not included). Fitting is rated at 100W max
- Plaster body • Plain ceramic finish: can be painted to match décor
- Pre-wired 300mm mains lead: easy installation • Earthed



V1

Code	Wattage	IP Rating	MOM / OPQ
CW3021	100W Max	IP20	1 / 8

CEILING/WALL/BULKHEADS



ALULANTPIR



VECOFPIRBK



VECOHPIRBK

LED ALUMINIUM LANTERNS



5 Year Warranty



110° PIR




An aesthetically pleasing outdoor fitting with superior construction for domestic and commercial applications

- Die-cast aluminium construction • Polycarbonate diffuser
- Earthed

PIR VERSION:

- 7 metre detection range • 110° detection angle
- Time on adjustment 8 sec - 8 min • Lux level adjustment 5 lux - 2000 lux



V1

Code	Version	Wattage	Colour Temp.	Lumens	Avg. Rated Life (Hrs)	IP Rating	MOM / OPQ
ALULANT	Standard	8W	4000K	570 lm	30,000 hrs	IP44	1 / 6
ALULANTPIR	110° PIR						

LED ECONOMY FULL LANTERNS



5 Year Warranty



120° PIR




Energy efficient LED alternative to traditional lanterns

- Tough polycarbonate construction
- Double insulated

PIR VERSION:

- Time on adjustment 5 secs - 5 mins • Lux level adjustments
- 120° detection angle • 8 metre detection range



V1

Code	Version	Wattage	Colour Temp.	Lumens	Avg. Rated Life (Hrs)	IP Rating	MOM / OPQ
VECOFBK	Standard	7W	3100K	420 lm	35,000 hrs	IP44	1 / 4
VECOPIRBK	120° PIR						

LED ECONOMY HALF LANTERNS



5 Year Warranty



120° PIR




Energy efficient LED alternative to traditional lanterns

- Tough polycarbonate construction
- Double insulated

PIR VERSION:

- Time on adjustment 5 secs - 5 mins • Lux level adjustments
- 120° detection angle • 8 metre detection range



V1

Code	Version	Wattage	Colour Temp.	Lumens	Avg. Rated Life (Hrs)	IP Rating	MOM / OPQ
VECOHBK	Standard	7W	3100K	420 lm	35,000 hrs	IP44	1 / 10
VECOHPIRBK	120° PIR						

POLYCARBONATE HALF LANTERNS

1
Year Warranty


IP44
120° PIR



- Requires 1 x suitable ES lamp (not included). Fitting is rated at 60W max
- Polycarbonate construction: corrosion resistant
- One piece lens: quick and easy assembly • Double insulated

PIR VERSIONS:

- 12 metre max detection range • Time on 3 minutes ± 20 sec
- 120° detection zone • Factory preset PIR - no override facility



Code	Colour	Version	Wattage	IP Rating	MOM / OPQ
HL60B	Black	Standard	60W Max	IP44	1 / 12
HL60WH	White				
PIRHL60BK	Black	120° PIR			
PIRHL60WH	White				

POLYCARBONATE FULL LANTERNS

1
Year Warranty


IP44
120° PIR



- Requires 1 x suitable ES lamp (not included). Fitting is rated at 60W max
- Gasketed mounting / wiring box • Hexagonal one piece lens: easy assembly
- Polycarbonate construction: corrosion resistant • Double insulated

PIR VERSION:

- 10 metre range with sensitivity adjustment control
- Time on adjustable (10±5) secs - (4±1) min • 110° detection zone
- Factory preset PIR - no override facility




Code	Version	Wattage	IP Rating	MOM / OPQ
L60B	Standard	60W Max	IP44	1 / 12
PIRL60BK	110° PIR			1 / 6

OFFICE BUILDING LIGHTING GUIDE

all guides can be downloaded from our website: www.eterna-lighting.co.uk/guides/

Eterna can supply all lighting products for all typical commercial and office buildings

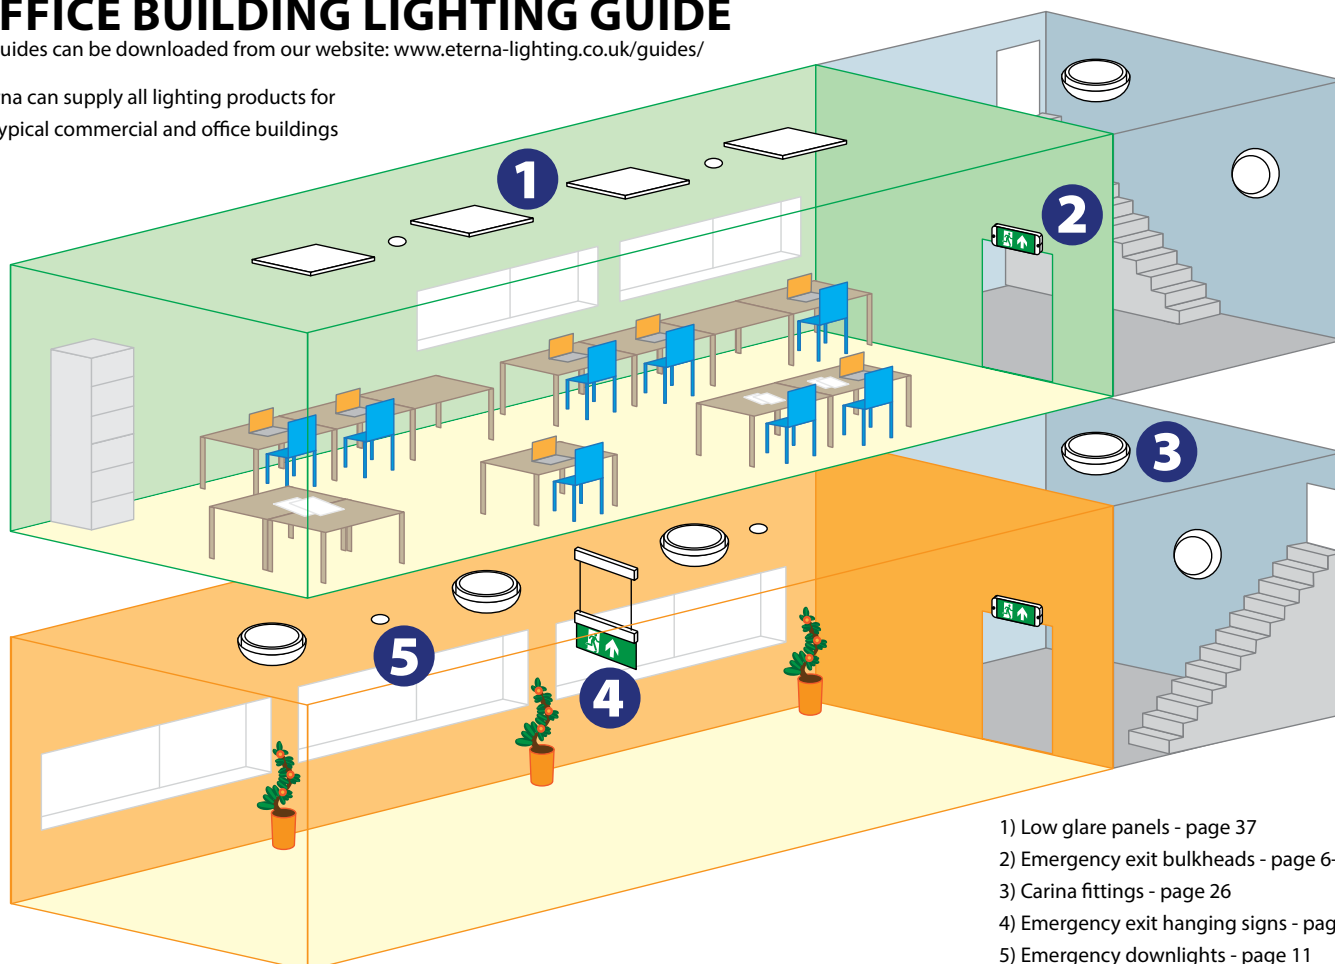


- 1) Low glare panels - page 37
- 2) Emergency exit bulkheads - page 6-7
- 3) Carina fittings - page 26
- 4) Emergency exit hanging signs - page 12-13
- 5) Emergency downlights - page 11

PANELS

FREE LIGHTING DESIGN SERVICE

To apply, simply complete the online form on our website:
www.eterna-lighting.co.uk/lighting-design-schemes/

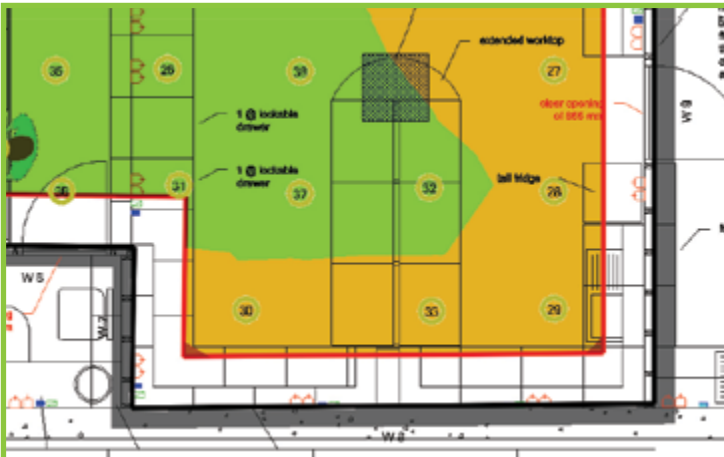

For more complex projects we are able to produce Lighting Design schemes to meet specific commercial needs, using **Relux** and **DIALux** design software.


THIS IS A FREE SERVICE DESIGNED TO HELP YOU WIN BUSINESS



Emergency Compatible

ALL ETERNA LED PANELS CAN BE CONVERTED INTO EMERGENCY LUMINAIRES

SEE PAGE 9 FOR OUR RANGE OF EMERGENCY BATTERY PACKS

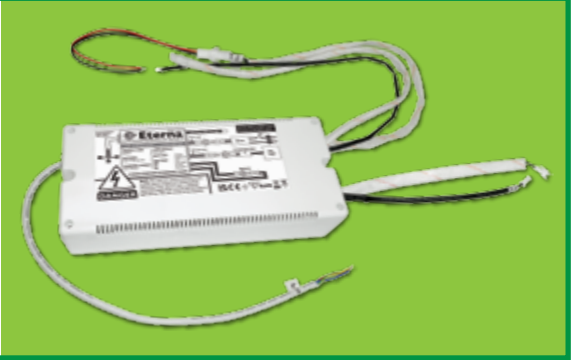

PANELS

TP(B) LED PANELS



5
Year Warranty





Emergency
Compatible



These light panels are designed to fit into the space normally occupied by standard 600mm x 600mm ceiling tiles, and are therefore a direct replacement for traditional modular fluorescent fittings used in many offices, educational and commercial applications

V1

- Aluminium frame • Supplied with Lifud branded driver
- Low glare and even shadow free light distribution ensures suitability for a variety of applications: visually superior to standard fluorescent panels
- 4000K colour temperature, edge lit: offering a bright neutral white lighting effect
- 5000K colour temperature, edge lit: offering a cool white lighting effect
- Ultra slim profile and a white trim finish to match the majority of T. bar ceilings
- CRI Ra:≥80: High CRI to minimise colour distortion of illuminated products
- Surface mounting can be achieved by using screwless kit: SURFACEMK
- Can be recessed in the ceiling or suspended from wires: see SUSPACK / PANSUSKIT suspension kit
- Ability to be converted into an emergency luminaire: see below for emergency battery packs
- Double insulated • IES files available



TP(b) Meaning

Specifiable ceiling panel with dimming options offering efficient output and TP(b) compliance and assurance from a Lifud branded driver

Code	Wattage	Colour Temp.	Lumens	Avg. Rated Life (Hrs)	IP Rating	MOM / OPQ
600x600						
600P4K	36W	4000K	3600 lm	30,000 hrs	IP20	1 / 5
600P5K		5000K				
1200x600						
1200P4K	60W	4000K	4800 lm	35,000 hrs	IP20	1 / 3
Accessories (2 x suspension packs needed for 1200x600 panel)						
SUSPACK	1m Cable Length Suspension Pack					1 / 100
PANSUSKIT	2m Cable Length Suspension Pack					1 / 100
SURFACEMK	Surface Mounting Kit (supplied in kit form)					1 / 20
EBPM3	10-60V 100W Max Battery Pack					1 / 1
SEEBPM3	Self Test 10-60V 100W Max Battery Pack					1 / 1
EBPM3LI	18-60Vdc 150W Max Li-Ion Battery Pack					1 / 40

600X600 LOW GLARE UGR≤19 LOUVERED PANEL



5
Year Warranty




Emergency
Compatible



This stylish indirect LED panel is primarily intended for areas where low glare compliance is required, but also suits any installation where high quality installation appearance & superior lighting performance is desired. Specifically engineered to achieve UGR≤19 and offering even light distribution with the minimum number of luminaires per installation

V1

- Eliminates the need for TP(a) or TP(b) compliance due to steel construction
- Includes a plug and play constant current non-dimmable LED driver
- High CRI (≥80): to minimise colour distortion of illuminated area & objects
- 4000K colour temperature offering a bright neutral white lighting effect
- White finish matching the majority of exposed T bar ceilings
- Push fit wiring terminal direct into the LED driver, terminal capacity up to 1.5mm²
- Surface mounting can be achieved by using screwless kit: SURFACEMK
- Ability to be converted into an emergency luminaire: see below for emergency battery packs
- Double insulated • IES files available




Code	Wattage	Colour Temp.	Lumens	Avg. Rated Life (Hrs)	IP Rating	MOM / OPQ
600P4KTPU	30W	4000K	3150 lm	40,000 hrs	IP20	1 / 5
Accessories						
SURFACEMK	Surface Mounting Kit (supplied in kit form)					1 / 20
EBPM3	10-60V 100W Max Battery Pack					1 / 1
SEEBPM3	Self Test 10-60V 100W Max Battery Pack					1 / 1
EBPM3LI	18-60Vdc 150W Max Li-Ion Battery Pack					1 / 40

600X600 BACKLIT LED PANEL

This commercial backlit LED panel produces a uniform light output with easy loop-in, loop-out push fit connectors whilst maintaining an ultra thin 35mm depth

V1

- Steel back panel, aluminium frame and polystyrene diffuser construction • IES files available
- Ra: ≥80, high CRI to minimise colour distortion of illuminated products in retail applications
- Zero maintenance, integral light source providing instant light output
- Operating temperature: 5 to 45°C • Lumen efficacy: 96 lm/W
- Includes a plug and play constant current non-dimmable LED driver
- Back lit: offering a bright neutral white lighting effect
- White trim finish to match the majority of T. bar ceilings
- Push fit wiring terminal direct into the LED driver • Double insulated
- Surface mounting can be achieved by using screwless kit: SURFACEMK
- Can be recessed in the ceiling or suspended from wires: see SUSPACK / PANSUSKIT suspension kit
- Ability to be converted into an emergency luminaire: see below for emergency battery packs




Code	Wattage	Colour Temp.	Lumens	Avg. Rated Life (Hrs)	IP Rating	MOM / OPQ
KPANBL	36W	4000K	3450 lm	30,000 hrs	IP20	1 / 6
Accessories						
SUSPACK	1m Cable Length Suspension Pack					1 / 100
PANSUSKIT	2m Cable Length Suspension Pack					1 / 100
SURFACEMK	Surface Mounting Kit (supplied in kit form)					1 / 20
EBPM3	10-60V 100W Max Battery Pack					1 / 1
SEEBPM3	Self Test 10-60V 100W Max Battery Pack					1 / 1
EBPM3LI	18-60Vdc 150W Max Li-Ion Battery Pack					1 / 40

600X600 BACKLIT LED PANEL



This commercial backlit LED panel produces a uniform light output with easy loop-in, loop-out push fit connectors whilst maintaining an ultra thin 35mm depth

V1


- Steel back panel, aluminium frame and polystyrene diffuser construction • IES files available
- Ra: ≥80, high CRI to minimise colour distortion of illuminated products in retail applications
- Zero maintenance, integral light source providing instant light output
- Operating temperature: 5 to 45°C • Lumen efficacy: 96 lm/W
- Includes a plug and play constant current non-dimmable LED driver
- Back lit: offering a bright neutral white lighting effect
- White trim finish to match the majority of T. bar ceilings
- Push fit wiring terminal direct into the LED driver • Double insulated
- Surface mounting can be achieved by using screwless kit: SURFACEMK
- Can be recessed in the ceiling or suspended from wires: see SUSPACK / PANSUSKIT suspension kit
- Ability to be converted into an emergency luminaire: see below for emergency battery packs



Code	Wattage	Colour Temp.	Lumens	Avg. Rated Life (Hrs)	IP Rating	MOM / OPQ
VECOMPANBL	36W	4000K	3450 lm	30,000 hrs	IP20	1 / 6
Accessories						
SUSPACK	1m Cable Length Suspension Pack					1 / 100
PANSUSKIT	2m Cable Length Suspension Pack					1 / 100
SURFACEMK	Surface Mounting Kit (supplied in kit form)					1 / 20
EBPM3	10-60V 100W Max Battery Pack					1 / 1
SEEBPM3	Self Test 10-60V 100W Max Battery Pack					1 / 1
EBPM3LI	18-60Vdc 150W Max Li-Ion Battery Pack					1 / 40

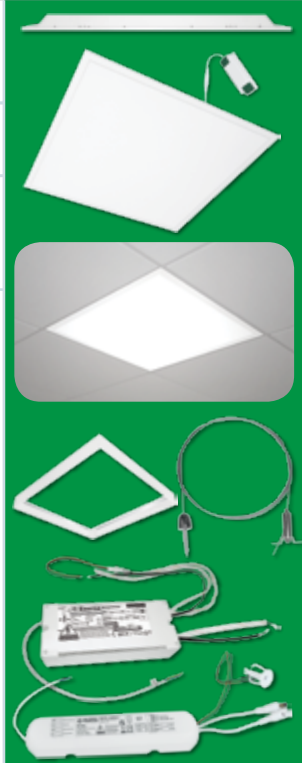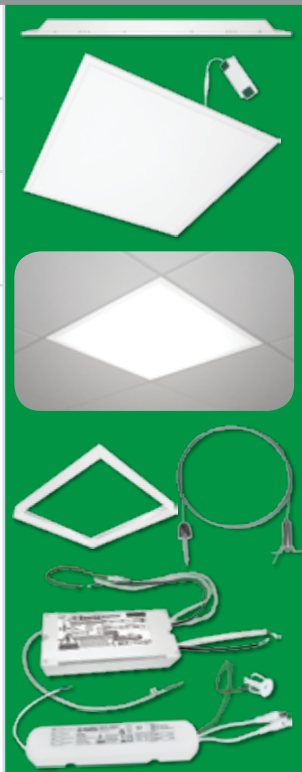

SURFACEMK NEW SCREWLESS SURFACE MOUNT KIT



Mount Kit
Panels
easily click
together

Suitable for
40mm depth
backlit
panels




BATTENS INTERIOR

INTERIOR BATTEN LIGHTING GUIDE

all guides can be downloaded from our website: www.eterna-lighting.co.uk/guides/


LED interior battens are the energy saving alternatives to traditional fluorescent versions.

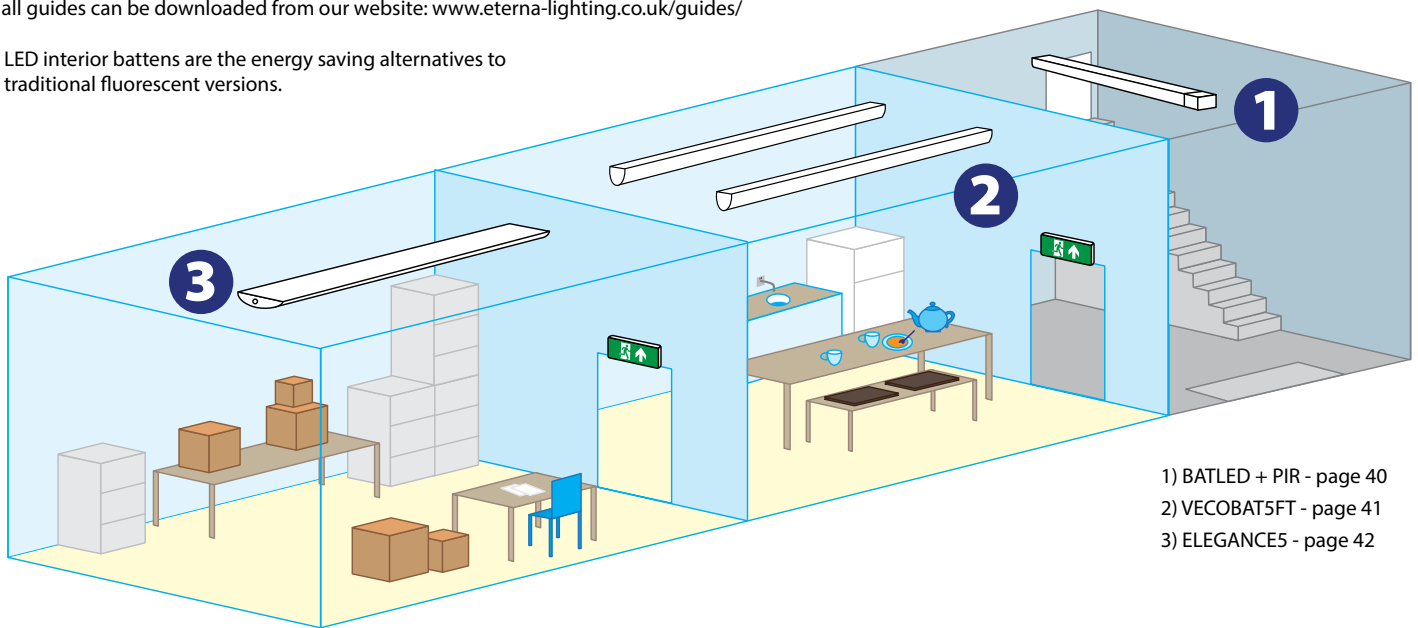


- 1) BATLED + PIR - page 40
- 2) VECOBAT5FT - page 41
- 3) ELEGANCE5 - page 42

Interior LED Batten Benefits

- ✓ Energy saving LEDs
- ✓ Bright illumination
- ✓ Long life-span
- ✓ Minimal maintenance
- ✓ Versatile for many installations
- ✓ Flicker free (excluding T8LED)
- ✓ Instant light output
- ✓ Popular in car parks, garages & toilet blocks
- ✓ Often used in bus & train stations
- ✓ Also ideal for storage rooms, hallways, corridors and canteen areas

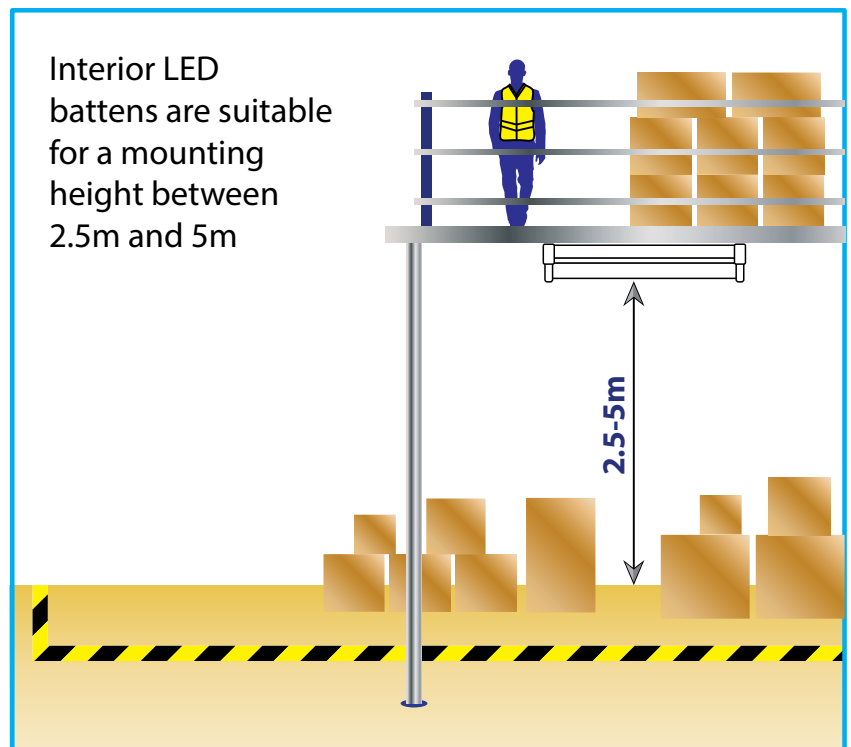

BATTENS - INTERIOR

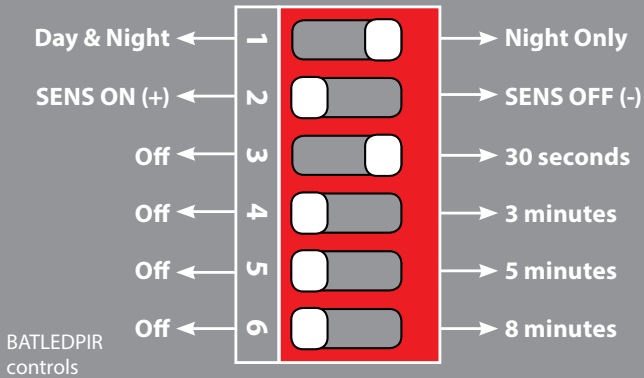

BATLED range


LED STANDARD & HIGH OUTPUT BATTENS & LI-ION EMERGENCY VERSIONS

-  LED
-  5 Year Warranty
-  Emergency Product
-  Li-Ion Battery
-  100° PIR




Full photometric data available to enable lighting designs. Light output is equivalent or superior to traditional fluorescent battens

- Pressed steel body and polycarbonate diffuser
- LED tray can be removed from the housing for easy installation
- 20mm knockout glands at each end for through wiring options
- BESA box mounting • Gear tray retaining straps
- Push terminal connections • Earthed • IES files available




EMERGENCY VERSIONS:

- LiFePO4 Lithium battery technology offering reduced energy consumption, enhanced charging cycle capacity & improved operational life compared to standard NiCad products
- Built-in battery overcharge protection • 3 hour non maintained operation
- Integrated green charging indicator LED • 160 lm in emergency mode
- Battery - Li-Ion 3.2V 1500mAh • Battery 1 year warranty - Replacement battery code: EB19




BATLEDPIR:

- Robust polycarbonate construction
- Time-on adjustable: 30 secs, 3 mins, 5 mins, 8 mins
- Night & day or night only options selectable
- Detection range 3-6 metres • 100° detection area
- Double insulated



Code	Version	Wattage	Colour Temp.	Lumens	Avg. Rated Life (Hrs)	IP Rating	MOM / OPQ				
BATLED4FT	4ft Standard	23W	4200K	2950 lm	35,000 hrs	IP20	1 / 6				
BATLED5FT	5ft Standard	38W		4750 lm							
BATLED6FT	6ft Standard	48W		6050 lm							
BATLED5HO	5ft High Output	60W		7550 lm							
BATLED6HO	6ft High Output	65W		8450 lm							
BATL4FTEM3	4ft EM3	23W		2950 lm							
BATL5FTEM3	5ft EM3	38W		4750 lm							
BATL6FTEM3	6ft EM3	48W		6050 lm							
BATL5HOEM3	5ft High Output EM3	60W		7550 lm							
BATL6HOEM3	6ft High Output EM3	65W		8450 lm							
BATLEDPIR	Add-on PIR Sensor										

BATTENS - INTERIOR

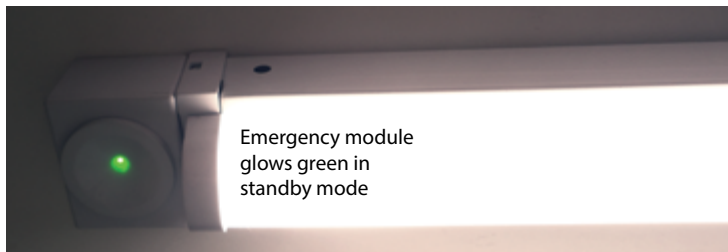

Emergency module glows green in standby mode



Bright white glow in emergency mode

SELF-TEST LED STANDARD & HIGH OUTPUT BATTENS



5 Year Warranty





Emergency Product



Full photometric data available to enable lighting designs. Light output is equivalent or superior to traditional fluorescent battens

V1

- Pressed steel body and polycarbonate diffuser
- LED tray can be removed from the housing for easy installation
- 20mm knockout glands at each end for through wiring options
- BESA box mounting • Gear tray retaining straps
- Push terminal connections • >120 lm/W
- Automatic testing in accordance with BS EN 62034
- Pre-wired for easy installation • Earthed
- LED glows green in standby mode and super bright white light in the event of a mains failure
- Minimum 3 hour functionality in emergency mode • 118 lumens in emergency mode
- Battery - Ni-Cd 3.6V 2000mAh • Battery 1 year warranty - Replacement battery code: EB2



Code	Version	Wattage	Colour Temp.	Lumens	Avg. Rated Life (Hrs)	IP Rating	MOM / OPQ
SELB4FTEM3	4ft EM3	23W	4200K	2930 lm	35,000 hrs	IP20	1 / 6
SELB5FTEM3	5ft EM3	38W		4800 lm			
SELB6FTEM3	6ft EM3	48W		6000 lm			
SELB5HOEM3	5ft High Output EM3	65W		7900 lm			
SELB6HOEM3	6ft High Output EM3	70W		8600 lm			

STANDARD & HIGH OUTPUT LED BATTENS



5 Year Warranty



- Pressed steel body and polycarbonate diffuser
- LED tray can be removed from the housing for easy installation
- 20mm knockout glands at each end for through wiring options
- BESA box mounting
- Gear tray retaining straps
- Up to 106 lm/W • Earthed • IES files available



V1

Code	Version	Wattage	Colour Temp.	Lumens	Avg. Rated Life (Hrs)	IP Rating	MOM / OPQ
VECOBAT4FT	4ft Standard	18W	4000K	1800 lm	30,000 hrs	IP20	1 / 6
VECOBAT5FT	5ft Standard	24W		2400 lm			
VECOBAT6FT	6ft Standard	32W		3400 lm			
VECOBAT5HO	5ft High Output	48W		4000 lm			
VECOBAT6HO	6ft High Output	64W		5200 lm			


STANDARD LED BATTENS



5 Year Warranty



- Pressed steel body and polycarbonate diffuser
- LED tray can be removed from the housing for easy installation
- 20mm knockout glands at each end for through wiring options
- BESA box mounting
- Gear tray retaining straps
- Up to 106 lm/W • Earthed • IES files available




V1

Code	Length	Wattage	Colour Temp.	Lumens	Avg. Rated Life (Hrs)	IP Rating	MOM / OPQ
KBAT4	4ft	18W	4000K	1800 lm	30,000 hrs	IP20	1 / 6
KBAT5	5ft	24W		2400 lm			
KBAT6	6ft	32W		3400 lm			

BATTENS - INTERIOR



ELESUSPACK

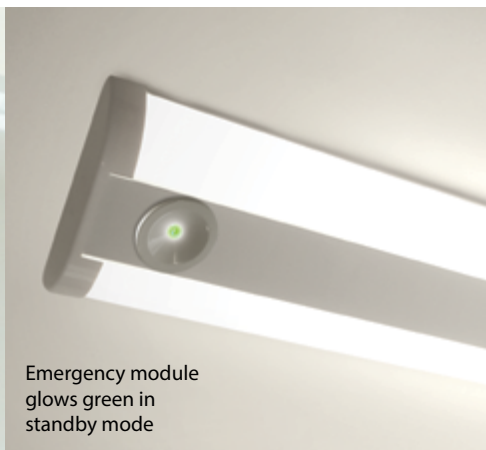

Emergency module glows green in standby mode



Bright white glow in emergency mode

5FT LED TWIN SLIMLINE CEILING FITTINGS



5 Year Warranty



Emergency Product



A slim, modern design LED ceiling fitting which offers a more stylish alternative to traditional battens. Where a more aesthetically pleasing fixture is desirable this versatile and elegant light source is suitable for commercial, retail and domestic applications

V1

- Polycarbonate and aluminium construction • 100 lm/W • Earthed
- IES files available (not EM3) • Push terminal connections



EMERGENCY VERSION (WITH LDLEM3):

- LED glows green in standby mode and super bright white light in the event of a mains failure
- Minimum 3 hour functionality in emergency mode • 118 lumens in emergency mode
- Battery - Ni-Cd 3.6V 2000mAh • Battery 1 year warranty - Replacement battery code: EB2

Code	Version	Wattage	Colour Temp.	Lumens	Avg. Rated Life (Hrs)	IP Rating	MOM / OPQ
ELEGANCE5	Standard	50W	4000K	5000 lm	40,000 hrs	IP20	1 / 6
ELEGAN5EM3	Emergency						
ELESUSPACK	Suspension Pack - Cable Length: 1m						1 / 100

IP65 LED NANO UTILITY BATTENS




5 Year Warranty



IP65



- Tough polycarbonate construction
- Push fit terminal connections for quick installation
- Cable gland included
- Double insulated • IES files available



V1

Code	Length	Wattage	Colour Temp.	Lumens	Avg. Rated Life (Hrs)	IP Rating	MOM / OPQ
KNANOIP2FT	2ft	15W	4000K	1800 lm	40,000 hrs	IP65	1 / 20
KNANOIP4FT	4ft	20W		2550 lm			
KNANOIP5FT	5ft	25W		2870 lm			


T8 SLIMLINE LED BATTENS



5 Year Warranty



- Polycarbonate and aluminium construction • Up to 87.5 lm/W
- Low energy alternative to a standard fluorescent batten
- Ultra-bright LEDs: low power consumption with enhanced life expectancy
- Slim design: offers a more stylish and modern solution to traditional battens
- Snap in fixing clips: easy installation
- Double insulated




V1

Code	Length	Wattage	Colour Temp.	Lumens	Avg. Rated Life (Hrs)	IP Rating	MOM / OPQ
T8LED16	900mm / 3ft	16W	4000K	1280 lm	20,000 hrs	IP20	1 / 20
T8LED20	1200mm / 4ft	20W		1600 lm			
T8LED24	1500mm / 5ft	24W		2100 lm			

BATTENS WEATHERPROOF

CARPARK LIGHTING GUIDE

all guides can be downloaded from our website:
www.eterna-lighting.co.uk/guides/

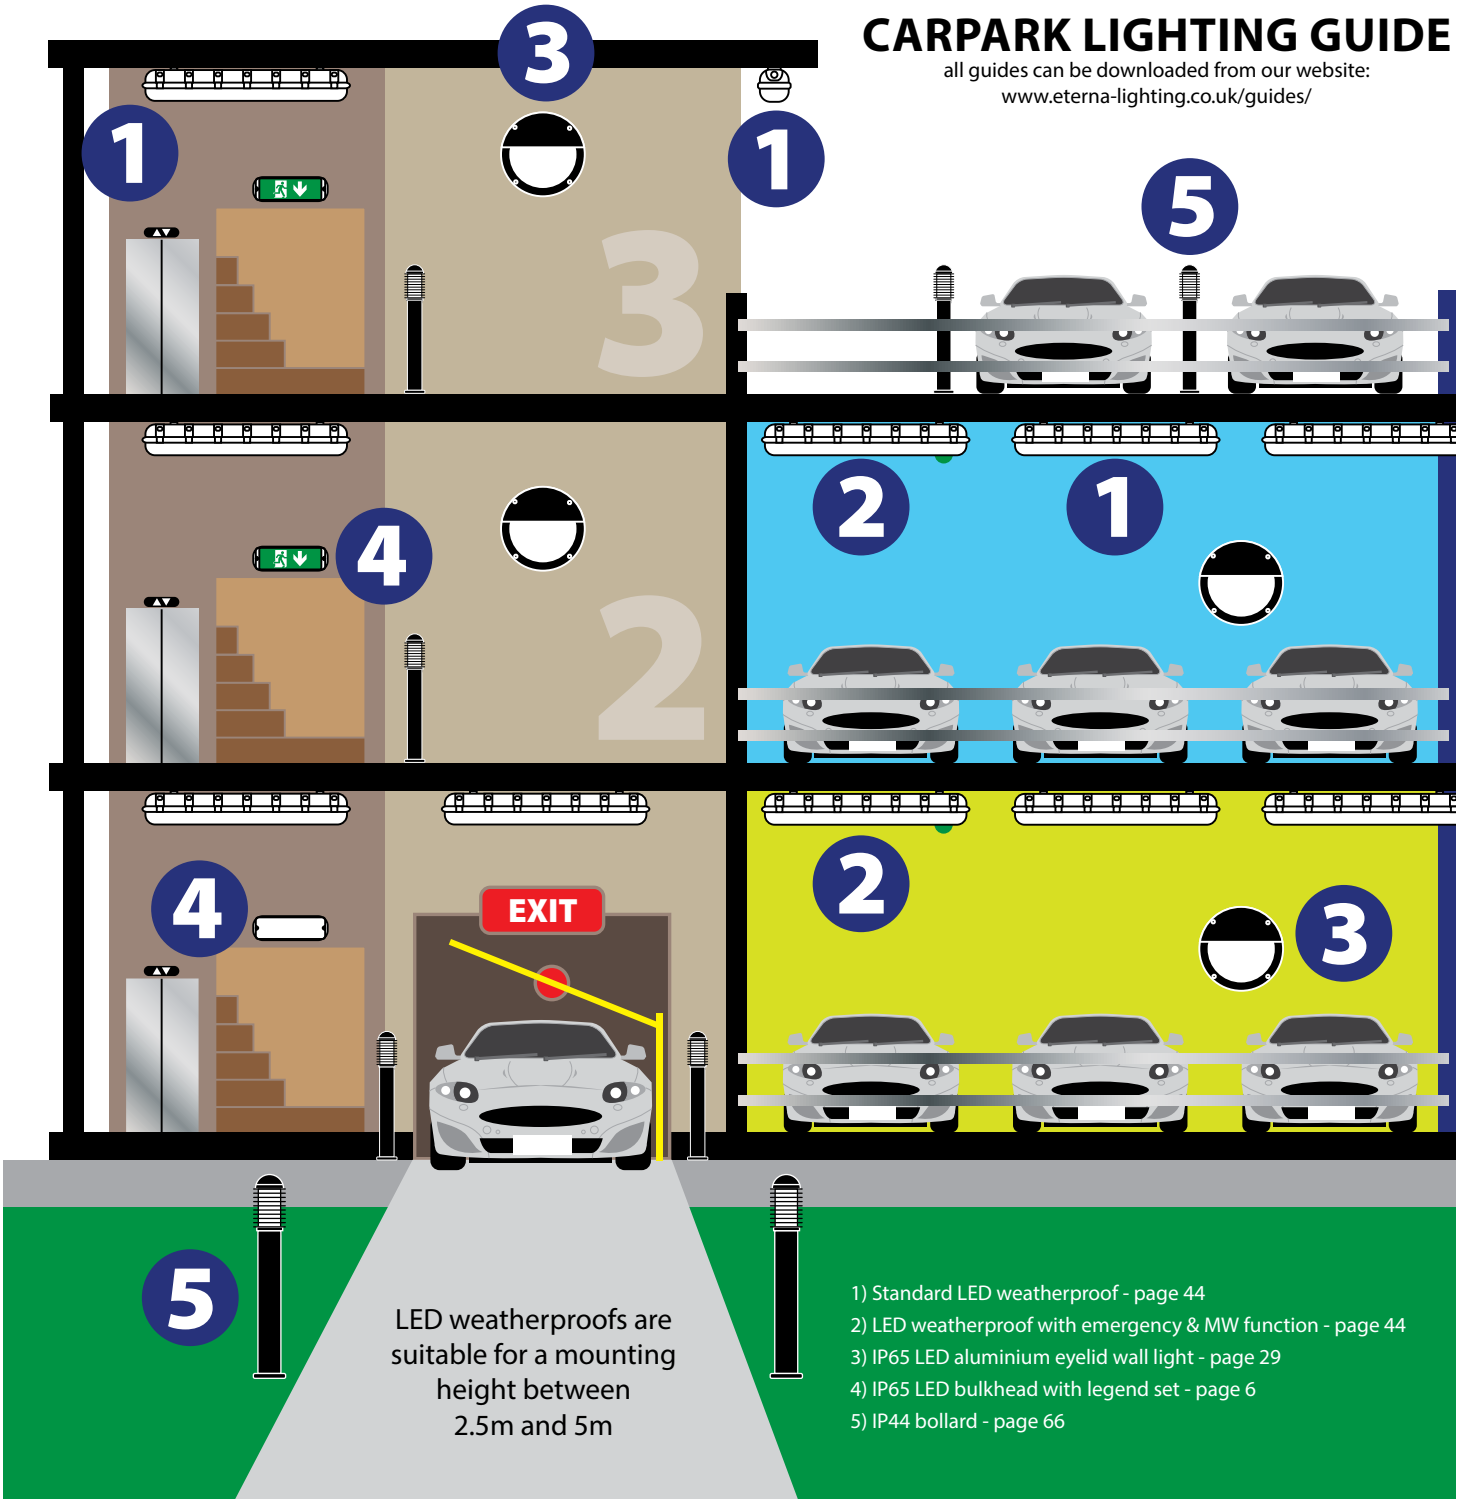

BATTENS - WEATHERPROOF

LED WEATHERPROOF IP65 BATTENS & LI-ION EMERGENCY VERSIONS



5
Year Warranty



Emergency
Product



Li-Ion Battery



IP65



IK10



Microwave
Sensor




This range is quick and easy to install due to "loop in & out" push fit connectors and features an IK10 "anti-drop" diffuser

V1

- Multiple cable entries, allowing for "loop in & out" wiring via push fit terminal block • Earthed
- "Anti-drop" polycarbonate diffuser & gear tray for ease of installation • Producing up to 106 lm/W
- Three mounting options - BESA box, directly onto ceiling surfaces or stainless steel suspension clips (incl)
- Standard fitting operating temperature: -20 to 45°C • Emergency fitting operating temperature: 0 to 45°C
- Supplied with a 20mm IP65 gland & fixings kit • IK10 rated fitting maximises durability and strength
- LED performance allows for "like for like" replacement of existing fluoresceint luminaires • IES files available

EMERGENCY VERSIONS:

- Emergency 3 hour duration maintained operation with the facility for remote switching
- Battery - Li-Ion 6.4V 1500mAh
- Battery 1 year warranty - Replacement battery code: EB20



MICROWAVE SENSOR VERSIONS:

- Integral adjustable microwave sensor, options to adjust daylight sensor 2-50 lux or disable, detection sensitivity 10-100% (range up to 10m, angle 30-150°). Hold on time 5 seconds to 15 minutes

Code	Version	Wattage	Colour Temp.	Lumens	Avg. Rated Life (Hrs)	IP / IK Rating	MOM / OPQ
Standard							
WP41	4ft Single	19W	4000K	1950 lm	40,000 hrs	IP65 IK10	1 / 6
WP42	4ft Twin	38W		3880 lm			
WP51	5ft Single	30W		3180 lm			
WP52	5ft Twin	58W		6020 lm			
WP61	6ft Single	35W		3680 lm			
WP62	6ft Twin	68W		6980 lm			
Emergency							
WP41EM3	4ft Single	19W	4000K	1950 lm	40,000 hrs	IP65 IK10	1 / 1
WP42EM3	4ft Twin	38W		3880 lm			
WP51EM3	5ft Single	30W		3180 lm			
WP52EM3	5ft Twin	58W		6020 lm			
WP61EM3	6ft Single	35W		3680 lm			
WP62EM3	6ft Twin	68W		6980 lm			
MW Sensor							
WP41MW	4ft Single	19W	4000K	1950 lm	40,000 hrs	IP65 IK10	1 / 1
WP42MW	4ft Twin	38W		3880 lm			
WP51MW	5ft Single	30W		3180 lm			
WP52MW	5ft Twin	58W		6020 lm			
WP61MW	6ft Single	35W		3680 lm			
WP62MW	6ft Twin	68W		6980 lm			
MW Sensor + Emergency							
WP41MW3	4ft Single	19W	4000K	1950 lm	40,000 hrs	IP65 IK10	1 / 1
WP42MW3	4ft Twin	38W		3880 lm			
WP51MW3	5ft Single	30W		3180 lm			
WP52MW3	5ft Twin	58W		6020 lm			
WP61MW3	6ft Single	35W		3680 lm			
WP62MW3	6ft Twin	68W		6980 lm			

5FT LED ECONOMY WEATHERPROOF




5
Year Warranty



IP65



- Polycarbonate construction
- Pre-wired with 1.5m cable
- Double insulated • IES files available



V1

Code	Wattage	Colour Temp.	Lumens	Avg. Rated Life (Hrs)	IP Rating	MOM / OPQ
VECOWP5FT	45W	4000K	4400 lm	30,000 hrs	IP65	1 / 20

BATTENS - WEATHERPROOF

LED WEATHERPROOF IP65 BATTENS & LI-ION EMERGENCY VERSIONS



5
Year Warranty



Li-Ion Battery



IK10




This range is quick and easy to install due to "loop in & out" push fit connectors and features an IK10 "anti-drop" diffuser

V1

- Multiple cable entries, allowing for "loop in & out" wiring via push fit terminal block • Earthed
- "Anti-drop" polycarbonate diffuser & gear tray for ease of installation • IES files available
- Three mounting options - BESA box, directly onto ceiling surfaces or stainless steel suspension clips (incl)
- Stainless steel diffuser clips supplied as standard, suitable for food industry applications
- Standard fitting operating temperature: -20 to 45°C • Emergency fitting operating temperature: 0 to 45°C
- Supplied with a 20mm IP65 gland & fixings kit • IK10 rated fitting maximises durability and strength
- LED performance allows for "like for like" replacement of existing fluorescent luminaires
- Producing up to 106 lm/W • IES files available for lighting designs

EMERGENCY VERSIONS:

- Emergency 3 hour duration maintained operation with the facility for remote switching
- Battery - Li-Ion 6.4V 1500mAh
- Battery 1 year warranty - Replacement battery code: EB20



Code	Version	Wattage	Colour Temp.	Lumens	Avg. Rated Life (Hrs)	IP / IK Rating	MOM / OPQ
Standard							
KWPSIN5	5ft Single	30W	4000K	3180 lm	40,000 hrs	IP65 IK10	1 / 6
KWPTWI5	5ft Twin	58W		6020 lm			
KWPSIN6	6ft Single	35W		3680 lm			
KWPTWI6	6ft Twin	68W		6980 lm			
Emergency							
KWPEM3SIN5	5ft Single	30W	4000K	3180 lm	40,000 hrs	IP65 IK10	1 / 1
KWPEM3TWI5	5ft Twin	58W		6020 lm			
KWPEM3SIN6	6ft Single	35W		3680 lm			
KWPEM3TWI6	6ft Twin	68W		6980 lm			


IP65 LED ECONOMY WEATHERPROOFS



5
Year Warranty



- Polycarbonate diffuser • ABS housing
- Multiple fixing options - supplied with surface mounting brackets and suspension hooks
- Push fit terminal connections
- Temporary suspension option for easy installation
- Cable entries on end and back of fitting
- Earthed • IES files available



V2

Code	Version	Wattage	Colour Temp.	Lumens	Avg. Rated Life (Hrs)	IP Rating	MOM / OPQ
VECO5WPSI2	5ft Single	30W	4000K	2900 lm	40,000 hrs	IP65	1 / 6
VECO5WPTW2	5ft Twin	45W		4300 lm			
VECO6WPSI2	6ft Single	48W		4500 lm			
VECO6WPTW2	6ft Twin	65W		6200 lm			


IP65 LED NANO UTILITY BATTENS



5
Year Warranty



- Tough polycarbonate construction
- Push fit terminal connections for quick installation
- Cable gland included
- Double insulated • IES files available




V1

Code	Length	Wattage	Colour Temp.	Lumens	Avg. Rated Life (Hrs)	IP Rating	MOM / OPQ
KNANOIP2FT	2ft	15W	4000K	1800 lm	40,000 hrs	IP65	1 / 20
KNANOIP4FT	4ft	20W		2550 lm			
KNANOIP5FT	5ft	25W		2870 lm			

FLOODLIGHTING



FLOOD120W shown
page 49

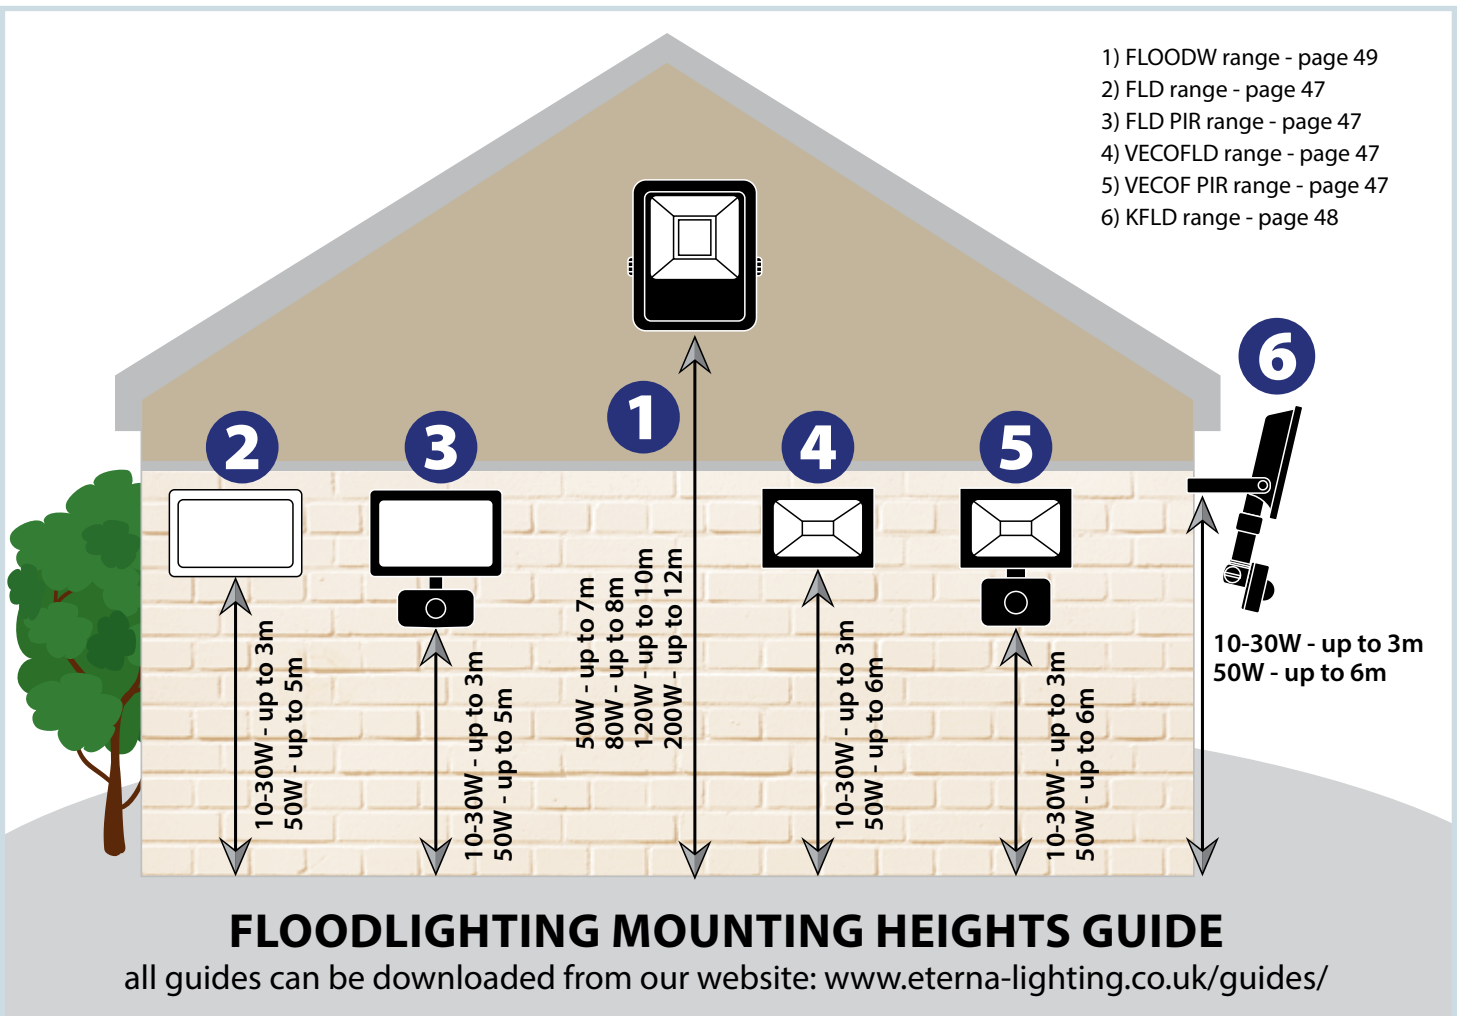

FLOODLIGHTING

LED FLOODLIGHTS



5

Year Warranty



IP65 / IP44



120° PIR




- Aluminium & polycarbonate construction • Horizontally and vertically adjustable bracket
- Detachable bracket allowing easy installation
- Fixed IP rated connector for wiring direct to the floodlight
- Terminal connector can be removed for ease of wiring • Earthed • IES files available

V1

PIR VERSIONS:

- Horizontally and vertically adjustable PIR with 120° detection angle
- Time on adjustment
10 sec ± 3 sec - 10 mins ± 3 mins
- 10W-30W: detection range 9m
- 50W: adjustable detection range between 4-8m
- Lux level adjustments: 5 Lux ~ 2000 Lux

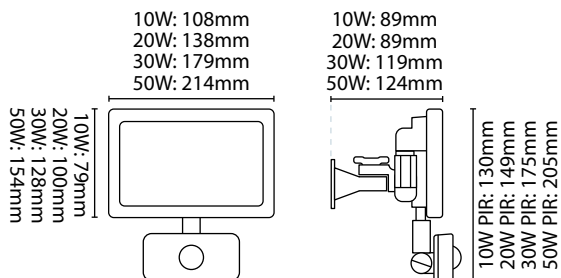

Code	Colour	Wattage	Colour Temp.	Lumens	Avg. Rated Life (Hrs)	IP Rating	MOM / OPQ
Standard							
FLD10BK	Black	10W	4000K	800 lm	25,000 hrs	IP65	1 / 40
FLD10WH	White						
FLD20BK	Black	20W		1600 lm			1 / 20
FLD20WH	White						
FLD30BK	Black	30W		2400 lm			1 / 10
FLD30WH	White						
FLD50BK	Black	50W	4000 lm	1 / 10			
FLD50WH	White						
120° PIR							
FLD10PIRBK	Black	10W	4000K	800 lm	25,000 hrs	IP44	1 / 20
FLD10PIRWH	White						
FLD20PIRBK	Black	20W		1600 lm			1 / 10
FLD20PIRWH	White						
FLD30PIRBK	Black	30W		2400 lm			1 / 10
FLD30PIRWH	White						
FLD50PIRWH	White	50W	4000 lm	1 / 10			

ECONOMY LED FLOODLIGHTS



5

Year Warranty



IP65 / IP44




- Aluminium body with tempered glass diffuser • IES files available
- Pre-wired with 30cm flex • Quick fix bracket • Earthed

V1

PIR VERSIONS:

- Vertically and horizontally adjustable PIR
- Time on adjustment: 10 sec ± 3 sec - 10 min ± 3 min
- 120° detection angle
- 8 metre detection range
- Lux level adjustments: 10 Lux ~ 2000 Lux

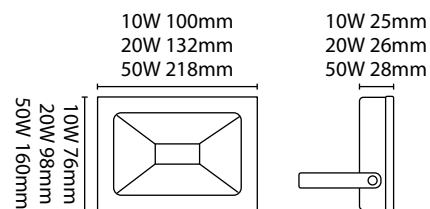

Code	Wattage	Colour Temp.	Lumens	Avg. Rated Life (Hrs)	IP Rating	MOM / OPQ
Standard						
VECOFLD10	10W	4000K	850 lm	25,000 hrs	IP65	1 / 40
VECOFLD50	50W		4250 lm			1 / 20
120° PIR						
VECOF10PIR	10W	4000K	850 lm	25,000 hrs	IP44	1 / 40
VECOF20PIR	20W		1700 lm			1 / 30
VECOF50PIR	50W		4250 lm			1 / 20

FLOODLIGHTING

KFLD RANGE QUICK FIX, PLUG & PLAY PIR ATTACHMENT



LED FLOODLIGHTS WITH PIR ATTACHMENT OPTION



-  LED
-  5 Year Warranty
-  IP65
-  120° PIR



- Aluminium body with tempered glass diffuser
- Pre-wired with 22cm 3 core flex • Quick fix bracket • Earthed

KFLDPIR:

- Vertically and horizontally adjustable PIR
- Time on adjustment:
10 sec ± 3 sec - 7 min ± 2 min
- Lux level adjustments: 5 Lux ~ 2000 Lux
- 120° detection angle
- 10 metre detection range

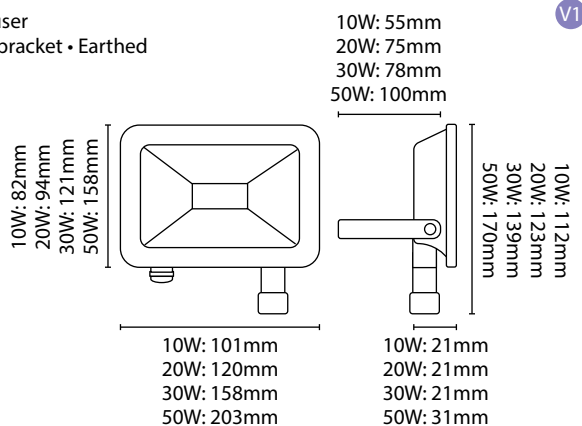


Code	Wattage	Colour Temp.	Lumens	Avg. Rated Life (Hrs)	IP Rating	MOM / OPQ
KFLD10	10W	4000K	900 lm	25,000 hrs	IP65	1 / 60
KFLD20	20W		1800 lm			1 / 40
KFLD30	30W		2800 lm			1 / 30
KFLD50	50W		4500 lm			1 / 20
KFLDPIR	Quick Fix, Plug & Play PIR Attachment					1 / 100

ECONOMY LED RECHARGEABLE FLOODLIGHTS WITH LI-ION BATTERY


-  LED
-  5 Year Warranty
-  IP44
-  Li-ion Battery



- ABS housing • Safety glass cover
- 10W: 2 x 18650 Li-ion battery - 3.7V, capacity 2200mAh
- 20W: 4 x 18650 Li-ion battery - 7.4V, capacity 4400mAh
- 4 hours illumination (with full charge)
- Charge times from full discharge are as follows:
6 hours (mains charger) / 6 hours (car charger)
- IP44: enables internal and external use
- Comes complete with mains charger and car charger

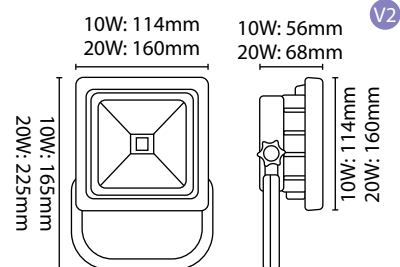

Code	Wattage	Colour Temp.	Lumens	Avg. Rated Life (Hrs)	IP Rating	MOM / OPQ
VECORCFL10	10W	4000K	650 lm	30,000 hrs	IP44	1 / 10
VECORCFL20	20W		1300 lm			1 / 5

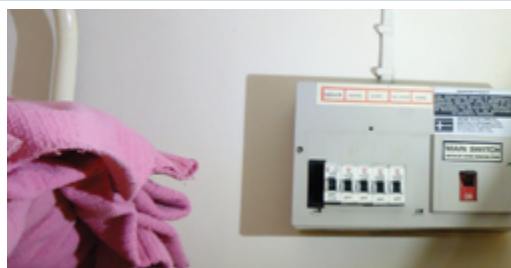

HIGH OUTPUT LED FLOODLIGHTS

V1




5
Year Warranty



Robust high output floodlight range offering performance and durability for industrial and commercial applications

FLOOD50W / 80W - PERFECT FOR INDUSTRIAL & COMMERCIAL APPLICATIONS
FLOOD120W / 200W - PERFECT WHEN A HIGHER MOUNTING HEIGHT IS REQUIRED

- High Power LED Chip array: which is better suited to these higher power ratings, where the large physical size of the housing and chip array maximises performance available from this technology
- 4000K colour temperature: bright light without the harsh effect of higher colour temperature products
- Die cast aluminium construction, toughened safety glass lens
- Pre-wired with 80cm of cable
- Over 108 lm/W • Earthed • IES files available

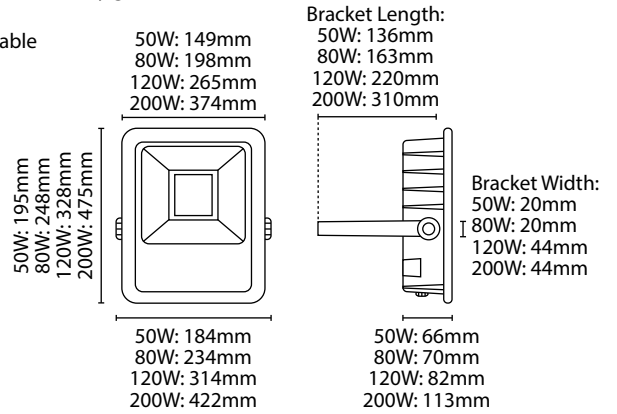

Code	Wattage	Colour Temp.	Lumens	Avg. Rated Life (Hrs)	IP Rating	MOM / OPQ
FLOOD50W	50W	4000K	5400 lm	25,000 hrs	IP65	1 / 6
FLOOD80W	80W		9400 lm			1 / 4
FLOOD120W	120W		14500 lm			1 / 1
FLOOD200W	200W		23000 lm			1 / 1



Illuminance Area diagrams for ALL the FLOODW range floodlights can be found on the website

FLOOD50W Illuminance Area

EXAMPLE FOR MEDIUM TRAFFIC PARKING AREAS

>=10 LUX AVERAGE

General circulation areas at outdoor work places

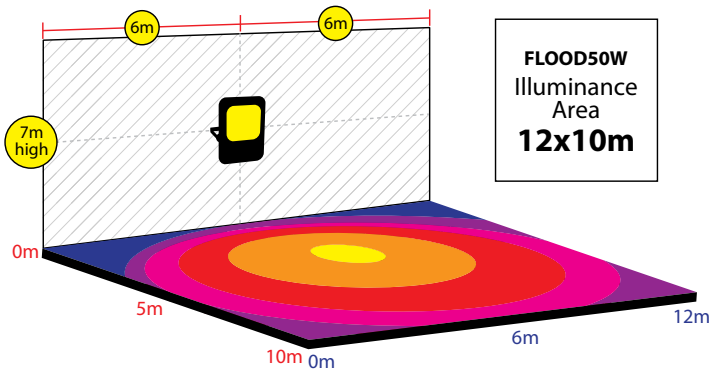



FLOOD200W Illuminance Area

EXAMPLE FOR MEDIUM TRAFFIC PARKING AREAS

>=10 LUX AVERAGE

General circulation areas at outdoor work places

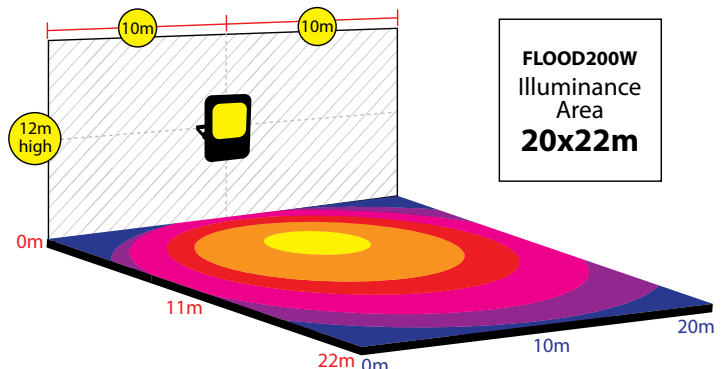

Based On Maintenance Factor 0.8 / Floodlight Angle: 63°

Based On Maintenance Factor 0.8 / Floodlight Angle: 63°

COMMON FLOODLIGHT IP RATINGS



The access probe of 1.0mm diameter shall not penetrate. Protected against water splashed from all directions. Limited ingress permitted.




Totally protected against the ingress of dust. Protected against jets of water. Limited ingress permitted.

HIGH & LOW BAY



ALL ETERNA HIGH BAYS AND LOW BAYS ARE PERFECT FOR WAREHOUSE APPLICATIONS

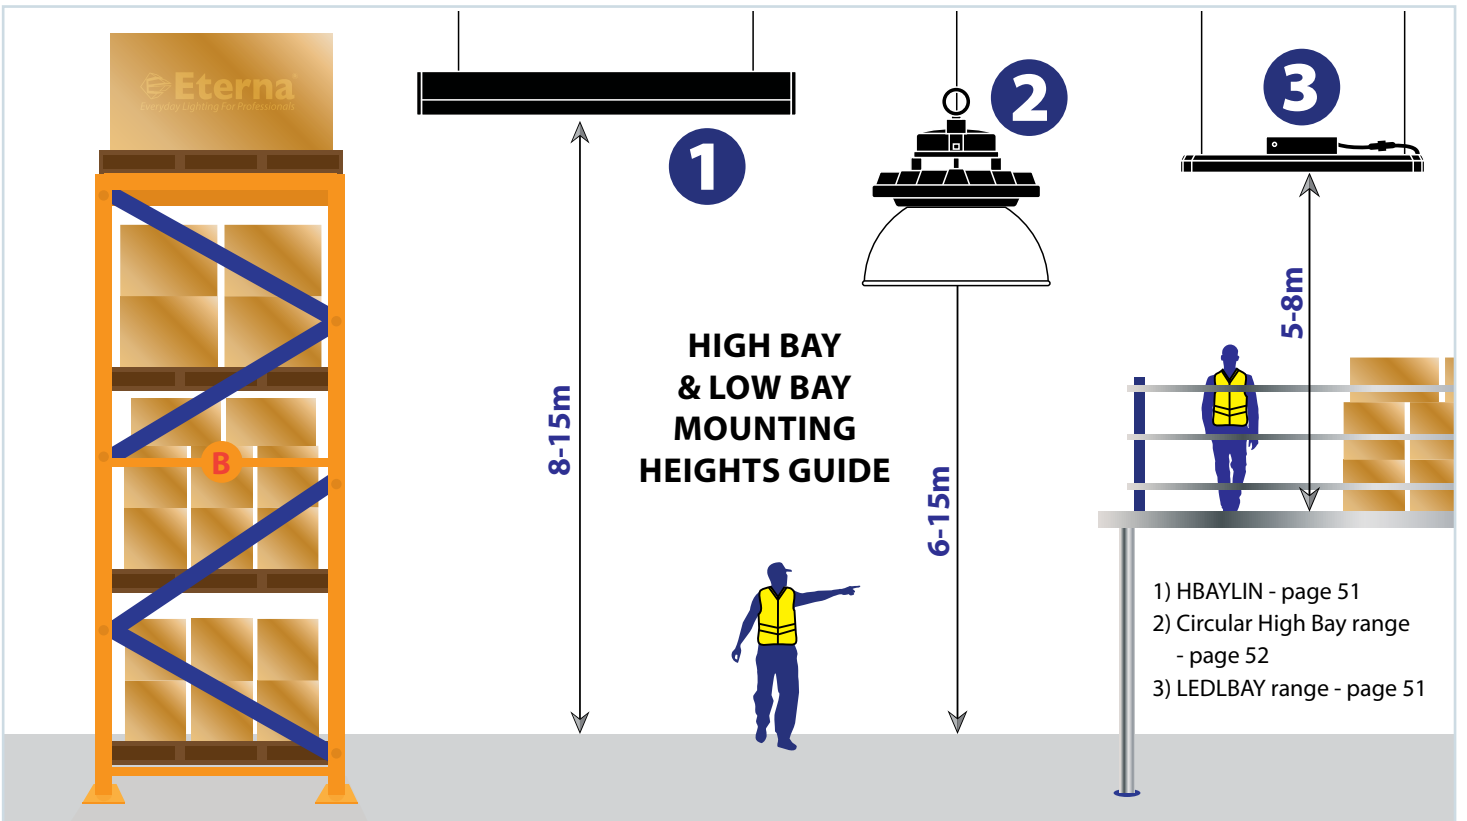

HIGH & LOW BAY

LEDLBAY50 shown with bracket



LINEAR LED LUMINAIRES




5 Year Warranty



Not just a low bay!! Although suitable for use as low bay for warehouse lighting the aesthetic design also lends itself to installation in public areas. IES files available to enable lighting plans

V2

- Frosted polycarbonate diffuser • Aluminium housing
- Suspension pack included, max length 1.5m
- Brackets available separately (see LBB range) for surface mounting or to enable installation with threaded rod
- Fitted with 1.5m mains input cable
- >119 lm/W • Earthed • IES files available

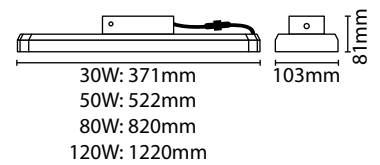

Code	Wattage	Colour Temp.	Lumens	Avg. Rated Life (Hrs)	IP Rating	MOM / OPQ
LEDLBAY30	30W	4000K	3622 lm	50,000 hrs	IP40	1 / 10
LEDLBAY50	50W		6263 lm			1 / 8
LEDLBAY80	80W		9734 lm			1 / 6
LEDLBAY120	120W		14309 lm			1 / 4
LBB3050	1 x 283mm Fixing Bracket For LEDLBAY30/50					1 / 20
LBB80	1 x 530mm Fixing Bracket For LEDLBAY80					1 / 20
LBB120	2 x 224mm Fixing Brackets For LEDLBAY120					1 / 40



150W LINEAR HIGHBAY WITH 90° LENS




5 Year Warranty



Long life, high performance luminaire offering low energy consumption and high lumen output at 143 lumens per watt. Ideal replacement for traditional HID metal halide fittings. For use in racked areas of warehouses or many other applications such as manufacturing, leisure facilities and retail environments

V1

- Aluminium housing, polycarbonate lens cover
- Supplied with 1.5m mains cable
- Includes adjustable hanging kit (1.5m length)
- Includes ceiling/wall tilt brackets
- Earthed • IES files available



Code	Wattage	Colour Temp.	Lumens	Avg. Rated Life (Hrs)	IP Rating	MOM / OPQ
HBAYLIN	150W	6300K	21460 lm	40,000 hrs	IP20	1 / 4

HIGH & LOW BAY




IP65 1-10V DIMMABLE LED CIRCULAR HIGH BAY



Long life, high performance luminaire offering low energy consumption and high lumen output at 123 lumens per watt. Ideal replacement for traditional HID metal halide fittings. For use in open areas of many applications such as warehousing, manufacturing, leisure facilities and retail environments

- Aluminium housing, polycarbonate lens cover
- IK09 rated durable construction
- 1-10V dimmable capability as standard
- Meanwell driver, Philips Lumileds LED chips
- Supplied with 30cm mains input cable and 30cm 1-10V cable
- Earthed • IES files available

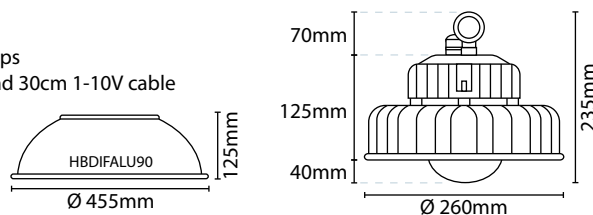


Code	Wattage	Colour Temp.	Lumens	Avg. Rated Life (Hrs)	IP / IK Rating	MOM / OPQ
HBYLED CIR	150W	4000K	18500 lm	30,000 hrs	IP65 IK09	1 / 2
HBDIFALU90	90° Aluminium Reflector					1 / 8

IP65 1-10V DIMMABLE LED CIRCULAR HIGH BAY



- Aluminium housing, glass lens cover
- IK08 rated durable construction
- 1-10V dimmable capability as standard
- Supplied with 36cm mains input cable and 34cm 1-10V cable
- 80cm stainless steel safety cable attached
- 140 lm/W • Samsung SMD LEDs
- Earthed • IES files available

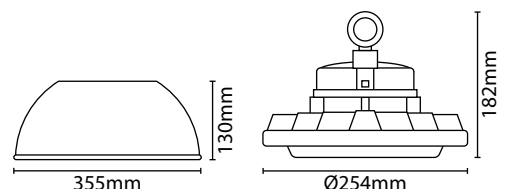


Code	Wattage	Colour Temp.	Lumens	Avg. Rated Life (Hrs)	IP / IK Rating	MOM / OPQ
HBCIR150	150W	4000K	21000 lm	30,000 hrs	IP65 IK08	1 / 1
HBCIRDIF90	90° Aluminium Reflector					1 / 20

IP65 1-10V DIMMABLE LED CIRCULAR HIGH BAY WITH LIFUD DRIVER



- Aluminium housing, glass lens cover
- IK08 rated durable construction
- 1-10V dimmable capability as standard
- Supplied with 42cm mains input cable and 33cm 1-10V cable
- 50cm stainless steel safety cable attached
- Philips Lumileds SMD LEDs
- 169 lm/W
- Earthed • IES files available

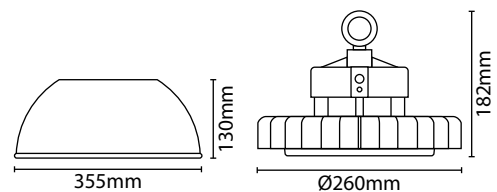

Code	Wattage	Colour Temp.	Lumens	Avg. Rated Life (Hrs)	IP / IK Rating	MOM / OPQ
HBCIR150PP	150W	3500K	25400 lm	50,000 hrs	IP65 IK08	1 / 1
HBCIRDIF90	90° Aluminium Reflector					1 / 20

DOWNLIGHTS

30-60-90 MINUTE FIRE RATED GUIDE

- ✓ Building regulation Part B specifies the level of fire protection within properties – typically ceilings have to be 30, 60 or 90 minute rated
- ✓ Cutting a hole in the ceiling compromises its integrity
- ✓ It is important that fire rated downlights pass all three tests separately
- ✓ It is not safe to assume that passing the 90 minute test means a downlight would also pass the 30 and 60 minute tests
- ✓ Eterna fire rated downlights will maintain the original fire rating of 30, 60 and 90 minute ceilings
- ✓ In the event of a fire, intumescent material will expand to seal the hole and block the passage of fire from passing through the downlight




ALL GUIDES CAN BE DOWNLOADED FROM OUR WEBSITE: www.eterna-lighting.co.uk/guides/



PLEASE NOTE: Due to the huge variety of dimmers in the market, dimming performance with all types cannot be guaranteed, compatibility should be tested before installation

DOWNLIGHTS


DIMMABLE COB LED RECESSED COLOUR TEMPERATURE SELECTABLE COMMERCIAL DOWNLIGHTS

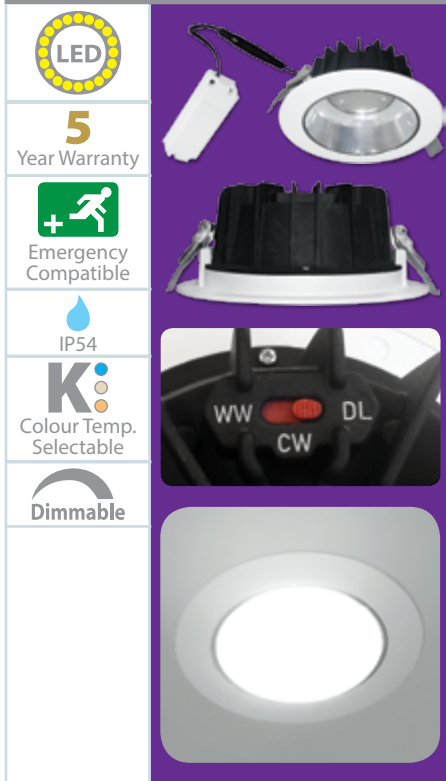

This range is ideal for many applications, with high lumen efficiency for enhanced energy saving and colour temperature selection allowing the desired lighting effect to be chosen on installation

V1

- Zero maintenance, integral light source providing instant light output
- LED performance allows for "like for like" replacement of fluorescent PL downlights
- Includes a plug and play constant current 0-10V dimmable LED driver
- Recessed light source with opal diffuser and polished reflector to reduce glare
- Flame retardant aluminium housing, includes spring clips to fix within the ceiling
- High CRI rating of >80, making them perfect for retail applications, minimising colour distortion
- Lumen efficacy of up to 114 lm/W • Double insulated • IES files available
- Ability to be converted into an emergency luminaire: see below for emergency battery packs

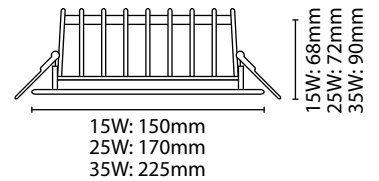

Code	Wattage	Colour Temp.	Lumens	Avg. Rated Life (Hrs)	IP Rating	Hole Cut Out Size	MOM / OPQ
COMRCS15	15W	3000K	1590 lm / 1710 lm / 1640 lm	45,000 hrs	IP54	130mm	1 / 20
COMRCS25	25W	4000K	2490 lm / 2685 lm / 2580 lm			150mm	1 / 20
COMRCS35	35W	6000K	3575 lm / 3850 lm / 3690 lm			200mm	1 / 10
Accessories							
EBPM3	10-60V 100W Max Battery Pack						1 / 1
SEEBPM3	Self Test 10-60V 100W Max Battery Pack						1 / 40
EBPM3LI	Li-Ion 18-60Vdc Maximum 150W Battery Pack						1 / 40

• Minimum free air space around the fitting 50mm. Cannot be directly covered with insulation


DIMMABLE LED RECESSED COLOUR TEMPERATURE SELECTABLE COMMERCIAL DOWNLIGHTS



This range is ideal for many applications, with high lumen efficiency for enhanced energy saving and colour temperature selection allowing the desired lighting effect to be chosen on installation

V1

- Tough polypropylene construction • Double insulated • IES files available
- Colour temperature selectable - options of 3000K/4000K/6000K
- High CRI rating of >80, making them perfect for retail applications, minimising colour distortion
- Lumen efficacy of up to 113 lm/W
- Integral terminal connections E- & E+ allow luminaire to be used in 3 hour emergency mode when used with Eterna battery packs

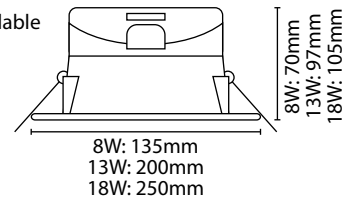


Code	Wattage	Colour Temp.	Lumens	Avg. Rated Life (Hrs)	IP Rating	Hole Cut Out Size	MOM / OPQ
KCOMCS8	8W	3000K	845 lm / 872 lm / 847 lm	40,000 hrs	IP44	110mm	1 / 30
KCOMCS13	13W	4000K	1401 lm / 1475 lm / 1442 lm			165mm	1 / 20
KCOMCS18	18W	6000K	1985 lm / 2030 lm / 2025 lm			205mm	1 / 12
Accessories							
EBPM3	10-60V 100W Max Battery Pack (not compatible with KCOMCS18)						1 / 1
SEEBPM3	Self Test 10-60V 100W Max Battery Pack (not compatible with KCOMCS18)						1 / 40
EBPM3LI	Li-Ion 18-60Vdc Maximum 150W Battery Pack (not compatible with KCOMCS18)						1 / 40

ECONOMY RECESSED LED DOWNLIGHTS



- Aluminium construction
- Multiple low power LED array: even, shadow free diffused light output
- Instant start to full illumination
- Unobtrusive design with neutral white trim
- 4000K colour temperature: for neutral white appearance
- Double insulated



Code	Wattage	Colour Temp.	Lumens	Avg. Rated Life (Hrs)	IP Rating	Hole Cut Out Size	MOM / OPQ
VECORDL6	6W	4000K	480 lm	25,000 hrs	IP20	105mm	1 / 100
VECORDL12	12W		1200 lm			155mm	1 / 20
VECORDL24	24W		2400 lm			285mm	1 / 20

DOWNLIGHTS

DIMMABLE COB LED RECESSED COMMERCIAL DOWNLIGHTS



5
Year Warranty



Emergency
Compatible




Dimmable



This range is ideal for many applications, especially the retail environment, where the crisp bright lighting effect offered by the clear diffuser is often preferred

V1

- Zero maintenance, integral light source providing instant light output
- LED performance allows for "like for like" replacement of fluorescent PL downlights
- Includes a plug and play constant current 0-10V dimmable LED driver
- Recessed polished diamond facet reflector with glass front to reduce glare
- Flame retardant aluminium housing, includes spring clips to fix within the ceiling
- High CRI rating of >80, making them perfect for retail applications, minimising colour distortion
- Lumen efficacy of up to 113.6 lm/W • Double insulated • IES files available
- Ability to be converted into an emergency luminaire: see below for emergency battery packs

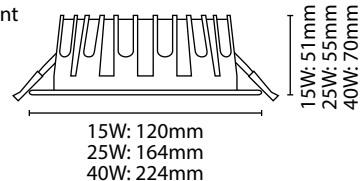

Code	Wattage	Colour Temp.	Lumens	Avg. Rated Life (Hrs)	IP Rating	Hole Cut Out Size	MOM / OPQ
COMDL15	15W	4000K	1705 lm	30,000 hrs	IP20	100mm	1 / 40
COMDL25	25W		2400 lm			140mm	1 / 20
COMDL40	40W		3500 lm			190mm	1 / 10
Accessories							
EBPM3	10-60V 100W Max Battery Pack						1 / 1
SEEBPM3	Self Test 10-60V 100W Max Battery Pack						
EBPM3LI	18-60Vdc 150W Max Li-Ion Battery Pack						1 / 40

• Minimum free air space around the fitting 150mm. Cannot be directly covered with insulation

COLOUR TEMPERATURE SELECTABLE RECESSED FLAT DOWNLIGHTS



5
Year Warranty




IP44

Colour Temp.
Selectable




Fire Rated

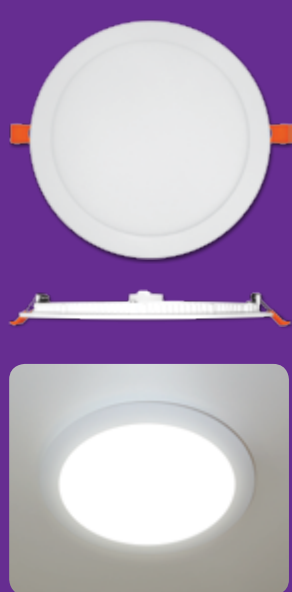

This range is ideal for many applications, with high lumen efficiency for enhanced energy saving and colour temperature selection allowing the desired lighting effect to be chosen on installation

V1

- Colour temperature selectable - options of 3000K, 4000K & 6000K easily set by a dip switch on the back of the fitting
- Flame retardant aluminium housing with polycarbonate diffuser, includes spring clips to fix within the ceiling
- Multiple LED low power array: even, shadow free diffused light output
- Zero maintenance, integral light source providing instant light output
- Flicker free operation • Lumen efficacy of up to 109 lm/W
- Slim profile design to allow installations with narrow ceiling voids
- Unobtrusive design with neutral white trim
- High CRI rating of >80, minimising colour distortion
- Double insulated • IES files available

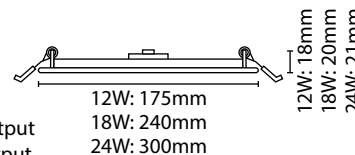

Code	Wattage	Colour Temp.	Lumens	Avg. Rated Life (Hrs)	IP Rating	Hole Cut Out Size	MOM / OPQ
KFLATDL12	12W	3000K	1250 lm / 1300 lm / 1250 lm	40,000 hrs	IP44 (front)	155mm	1 / 30
KFLATDL18	18W	4000K	1900 lm / 1970 lm / 1900 lm			220mm	1 / 20
KFLATDL24	24W	6000K	2500 lm / 2530 lm / 2520 lm			280mm	1 / 16

• Minimum free air space around the fitting 50mm. Cannot be directly covered with insulation

IP65 MAINS SHOWER LIGHT CONVERTERS

1
Year Warranty




IP65

Bathroom
Zone 1 & 2



- Steel construction
- Requires 1 x GU10 energy saving lamp (not included). Fitting is rated at 50W max
- Sprung bezel pulls off to facilitate easy lamp change
- Double insulated

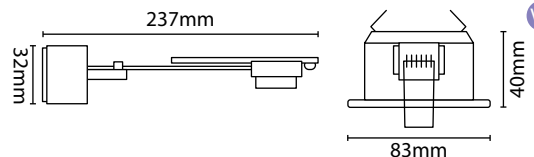

V1

Code	Colour	Wattage	IP Rating	Hole Cut Out Size	MOM / OPQ
SLGUCR	Polished Chrome	50W Max	IP65	70mm	5 / 50
SLGUSN	Brushed Nickel				
SLGUWH	White				

DOWNLIGHTS



DIMMABLE COB LED RECESSED COLOUR TEMPERATURE SELECTABLE COMMERCIAL DOWNLIGHTS



5 Year Warranty





Colour Temp. Selectable



High performance, fire rated downlight with pre-wired plug in connector for easy installation and circuit integrity checks without fixture being connected

V1

- Aluminium & polycarbonate construction
- Dimmable - for optimum dimming performance we recommend using a compatible LED dimmer
- Fire rated tested for individual 30, 60 and 90 min ceiling types
- Selectable colour temperature with warm, cool and daylight options
- Pre-wired with 20cm cable onto plug-in connector screw terminal block
- 4 terminal connector allows for loop in/out lighting circuits
- Silicon bezel seals against air permeability • 60° beam angle
- Double insulated • IES files available

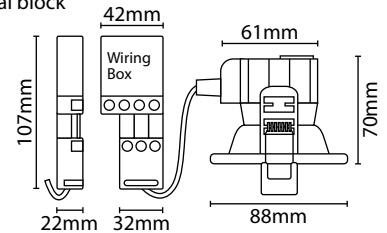

Code	Colour	Wattage	Colour Temp.	Lumens	Avg. Rated Life (Hrs)	IP Rating	Hole Cut Out Size	MOM / OPQ
IFIRELCSCH	Polished Chrome	8W	3000K	670 lm	40,000 hrs	IP65	76mm	1 / 40
IFIRELCSN	Brushed Nickel		4000K	780 lm				
IFIRELCSWH	White		6000K	700 lm				

ECONOMY LED IP65 FIRE RATED DIMMABLE DOWNLIGHTS




5 Year Warranty



Dimmable



- Pressed steel construction • 60° beam angle • Push terminals
- Fire rated tested for individual 30, 60 and 90 min ceiling types
- Dimmable - for optimum dimming performance we recommend using a compatible LED dimmer
- Foam bezel seals against air permeability
- Integrated chrome bezel with additional satin nickel and white bezels also included
- Double insulated • IES files available
- VECOIBRACK - polycarbonate construction

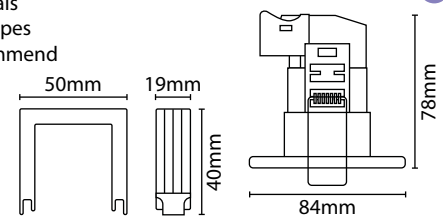

Code	Wattage	Colour Temp.	Lumens	Avg. Rated Life (Hrs)	IP Rating	Hole Cut Out Size	MOM / OPQ
VECOIFIRE3	5W	3000K	540 lm	36,000 hrs	IP65	60mm	1 / 40
VECOIFIRE4		4000K	560 lm				
VECOIBRACK	Insulating Bracket						1 / 200

5W DIMMABLE FIRE RATED IP65 LED DOWNLIGHTS



5 Year Warranty




Dimmable



Compact and convenient design with high quality loop in, loop out terminal block

V1

- Fire Rated - individually tested within 30, 60 and 90 minute ceiling constructions
- Foam bezel seals against air permeability
- Compact and convenient design
- 40° beam angle
- Push terminals
- Loop-in Loop-out wiring facility
- Earthed • IES files available



Code	Colour	Wattage	Colour Temp.	Lumens	Avg. Rated Life (Hrs)	IP Rating	Hole Cut Out Size	MOM / OPQ
KFIRE4CR	Polished Chrome	5W	4000K	515 lm	25,000 hrs	IP65 (front) IP20 (rear)	65mm	1 / 20
KFIRE4SN	Brushed Nickel							
KFIRE4WH	White							


DOWNLIGHTS

MAINS / LOW VOLTAGE CEILING DOWNLIGHT CONVERTERS

1
Year Warranty



- Pressed steel construction • Fitting is rated at 50W max
- Supplied with ceramic GU10 & GU5.3 lampholders
- Pre-wired with low voltage lampholder, GU10 lampholder option also included
- Hole cut out 70-140mm: replaces a wide range of outdated downlights
- Shallow profile: neat, unobtrusive solution
- Converts traditional mains R50, R64 and R80 downlight and eyeball dimensions to modern GU10 or low voltage lighting: allows use of modern light source without expensive repairs & decoration
- Double insulated



V1

Code	Colour	Wattage	IP Rating	Hole Cut Out Size	MOM / OPQ
CR80CR	Polished Chrome	50W Max	IP20	70mm -140mm	5 / 40
CR80SN	Brushed Nickel				
CR80WH	White				


LED SURFACE / RECESSED CABINET DOWNLIGHTS



5
Year Warranty



- Steel construction • Visually similar to 20W G4 halogen
- 3000K warm colour temperature: offering a pleasing lighting appearance
- 1.7W = 160 lumens: ideal low energy solution to standard halogen cabinet lights
- Not suitable for use with dimmers
- Pre-wired with 2m mains cable and no separate driver required: facilitating easy installation
- Mains voltage: integral driver • Double insulated



V1

Code	Colour	Wattage	Colour Temp.	Lumens	Avg. Rated Life (Hrs)	IP Rating	Hole Cut Out Size	MOM / OPQ
CLEDCIR	Nickel	1.7W	3000K	160 lm	30,000 hrs	IP20	61mm	1 / 40
CLEDCIRWH	White							


LED TRIANGLE CABINET DOWNLIGHT



5
Year Warranty



- Steel construction • Visually similar to 20W G4 halogen
- 3000K warm colour temperature: offering a pleasing lighting appearance
- 1.7W = 160 lumens: ideal low energy solution to standard halogen cabinet lights
- Not suitable for use with dimmers
- Pre-wired with 2m mains cable and no separate driver required: facilitating easy installation
- Mains voltage: integral driver • Double insulated



V1

Code	Wattage	Colour Temp.	Lumens	Avg. Rated Life (Hrs)	IP Rating	MOM / OPQ
CLEDTRI	1.7W	3000K	160 lm	30,000 hrs	IP20	1 / 40


PLASTIC LED UNDER CABINET LIGHTS



5
Year Warranty



- Polycarbonate construction
- 3000K warm white colour temperature: offering a pleasing lighting appearance
- 2W = 100 lumens: ideal low energy solution to standard halogen cabinet lights
- Pre-wired with 2m mains cable and no separate driver required: facilitating easy installation
- Not suitable for use with dimmers
- Not suitable for recessed installation • Double insulated








V1

Code	Version	Wattage	Colour Temp.	Lumens	Avg. Rated Life (Hrs)	IP Rating	MOM / OPQ
VECOABPCI	Circular	2W	3000K	100 lm	30,000 hrs	IP20	1 / 100
VECOABPTR	Triangle						

BATHROOM LIGHTING


**PLEASE NOTE:
BATHROOM SHAVER LIGHTS ARE NOT
SUITABLE FOR TOOTHBRUSH CHARGERS**

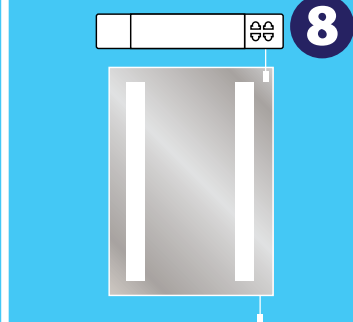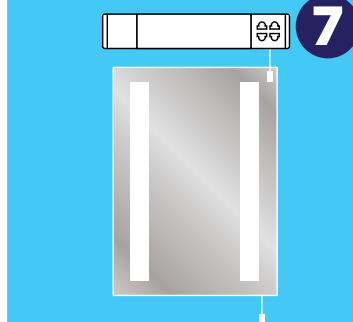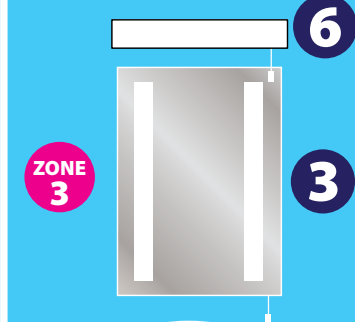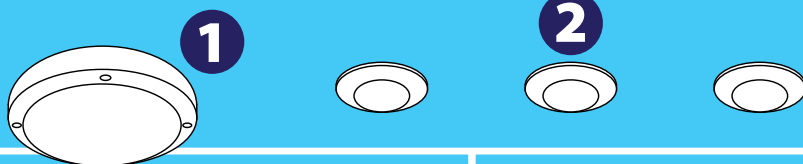

BATHROOM LIGHTING GUIDE

all guides can be downloaded from our website: www.eterna-lighting.co.uk/guides/

- 1) PACIFIC12 - Zone 1 - page 61
- 2) IFIRELCS range - Zone 1 - page 61
- 3) LEDMIRROR - Zone 2 - page 60
- 4) LEDSH6 range - Zone 3 - page 59
- 5) LEDOM5 range - Zone 3 - page 60
- 6) OMLD10 - Zone 2 - page 60
- 7) LEDSH44 - Zone 3 - page 59
- 8) LEDSHDVO - Zone 3 - page 59

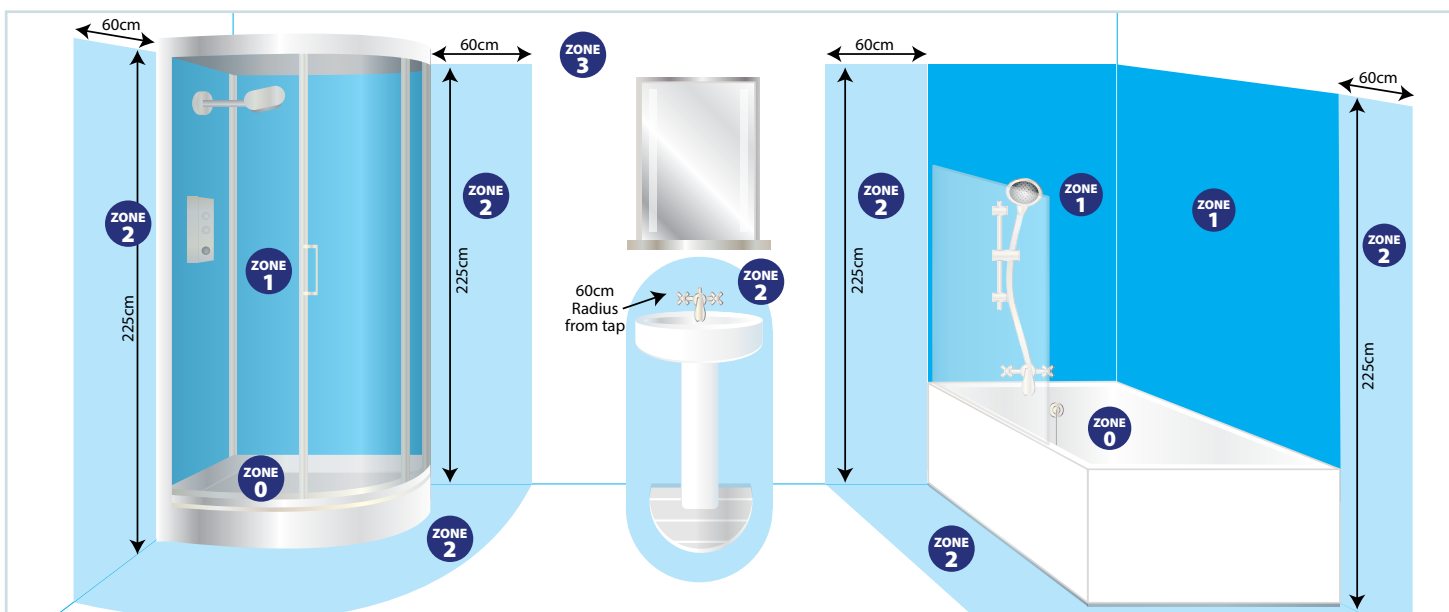

Bathroom Zone 0	Bathroom Zone 1	Bathroom Zone 2	Bathroom Zone 3
The interior of the bath or shower tray	Above the bath or shower tray to a height of 2.25 metres from the floor	Outside the bath or shower, extending 0.6 metres beyond zone 1 and including the area around wash basins	Outside zones 0, 1 or 2 and where no water jet is likely to be used for cleaning purposes. No specific IP rating is required. If water jets are used for cleaning in zones 1, 2 or 3, a fitting must have a minimum IPx5 rating


BATHROOM LIGHTING

"DESIGNER STYLE" SHAVERLIGHT LUMINAIRES



Contemporary "designer style" alternative to standard functional products

- Vertical or horizontal mounting • Elegantly integrated push switch
- IP21 rated and insulated class 2 construction
- Available in chrome or white to compliment most bathroom decors
- Permanent power to shaver socket allowing use when not illuminated
- Dual voltage 110V and 240V shaver socket located under a slide to open cover maintains sleek appearance when not in use
- Double insulated



Code	Colour	Wattage	Colour Temp.	Lumens	Avg. Rated Life (Hrs)	IP Rating	MOM / OPQ
LEDSH6CR	Chrome	6W	3000K	520 lm	25,000 hrs	IP21	1 / 10
LEDSH6WH	White						


SEE PAGE 60 FOR MATCHING OVER MIRROR LIGHTS IN THIS RANGE

LED DUAL VOLTAGE SHAVER LIGHT



Ever popular fittings offering functionality and long term performance for domestic and commercial bathrooms

- Polycarbonate construction • Optional fit chrome effect trims included
- Dual voltage shaver socket and safety isolating transformer: for bathroom use
- Permanent power to shaver socket: with a pull cord switch for isolated illumination
- Access cover to connection block: easy wiring from the front of the fitting
- Earthed




Code	Wattage	Colour Temp.	Lumens	Avg. Rated Life (Hrs)	Fitting IP Rating	Socket IP Rating	MOM / OPQ
LED SH44	5.5W	3000K	410 lm	25,000 hrs	IP44	IP21	1 / 10

LED DUAL VOLTAGE SHAVER LIGHT



Versatile fitting offering functionality and long term performance for domestic and commercial bathrooms

- Polycarbonate construction
- Requires 1 x S15 284mm double ended tubular lamp (included). Fitting is rated at 60W max
- Low energy consumption and prolonged lamp life
- Instant start, super bright LED's, 3000K warm colour temperature: offering a pleasing light appearance
- High CRI ≥80: minimises colour distortion of illuminated objects
- Dual voltage shaver socket and safety isolating transformer: for bathroom use
- Mains isolation upon diffuser removal
- **NOTE:** the shaver socket will only operate when the light is switched on
- Earthed




Code	Wattage	Colour Temp.	Lumens	Avg. Rated Life (Hrs)	IP Rating	MOM / OPQ
LED SHDVO	6W	3000K	400 lm	15,000 hrs	IP20	1 / 10

18W LOW ENERGY DUAL VOLTAGE SHAVER LIGHT



- Polycarbonate construction • Optional fit chrome effect trims included
- Requires 1 x 18W 2G11 single turn L 4 pin CFL lamp (included). Fitting is rated at 18W max
- Permanent power to shaver socket • Transformer is double-wound isolated
- Dual voltage shaver socket and safety isolating transformer: for bathroom use
- Access cover to connection block: easy wiring from the front of the fitting
- Dedicated low energy light source • Earthed



Code	Wattage	Colour Temp.	Lumens	Avg. Rated Life (Hrs)	Fitting IP Rating	Socket IP Rating	MOM / OPQ
SH1844DVO	18W	3500K	380 lm	10,000 hrs	IP44	IP21	5 / 10

BATHROOM LIGHTING

LED MIRROR LIGHT WITH DUAL VOLTAGE SHAVER SOCKET




5
Year Warranty



Bathroom
Zone 2


- Pressed steel base & glass mirror
- Pull cord on/off switch
- Diffused rectangular light apertures: soft lighting effect
- Permanent power to integrated dual voltage shaver socket: eliminates the need for separate shaver socket
- Safety isolating transformer on shaver outlet • Earthed



V1

Code	Wattage	Colour Temp.	Lumens	Avg. Rated Life (Hrs)	IP Rating	MOM / OPQ
LEDMIRROR	10.3W	3000K	130 lm	30,000 hrs	IP44	1 / 1

MIRROR LIGHT WITH DUAL VOLTAGE SHAVER SOCKET

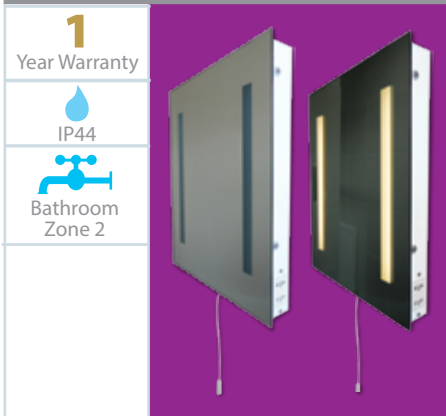


1
Year Warranty



Bathroom
Zone 2


- Requires 2 x 15W G13 T8 450mm fluorescent tubes (included). Fitting is rated at 15W max (per lampholder)
- Pull cord on/off switch
- Diffused rectangular light apertures: soft lighting effect
- Permanent power to integrated dual voltage shaver socket: eliminates the need for separate shaver socket
- Safety isolating transformer on shaver outlet: suitable for bathroom use
- High frequency electronic ballast: instant start, flicker free operation, and prolonged lamp life
- Earthed



V1

Code	Wattage	Colour Temp.	Lumens	Avg. Rated Life (Hrs)	IP Rating	MOM / OPQ
ML5040	2 x 15W	2700K	2 x 1010 lm	15,000 hrs	IP44	1 / 1

"DESIGNER STYLE" OVER MIRROR LUMINAIRES

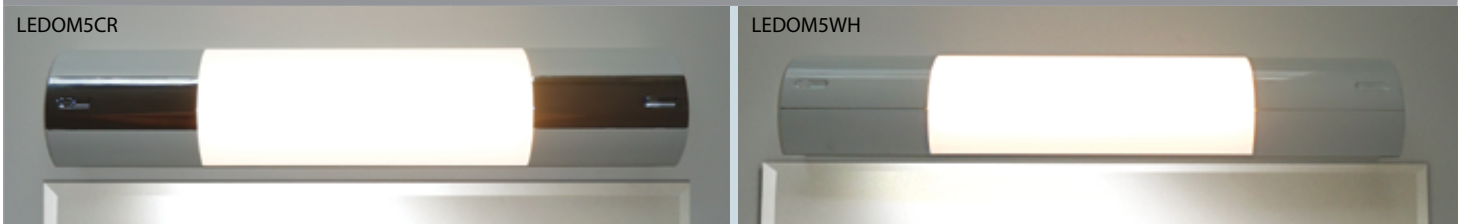


5
Year Warranty



Bathroom
Zone 3

Contemporary "designer style" alternative to standard functional products

- Vertical or horizontal mounting • Elegantly integrated push switch
- IP21 rated and insulated class 2 construction
- Available in chrome or white to compliment most bathroom decors
- Double insulated



V1

Code	Colour	Wattage	Colour Temp.	Lumens	Avg. Rated Life (Hrs)	IP Rating	MOM / OPQ
LEDOM5CR	Chrome	5W	3000K	520 lm	25,000 hrs	IP21	1 / 10
LEDOM5WH	White						

WHITE / MATT SILVER LED OVER MIRROR LIGHT




5
Year Warranty



Bathroom
Zone 2

This stylish fitting is the perfect solution to provide additional task lighting in many applications. The fitting provides excellent light output and is a superb energy efficient and long life alternative to fluorescent products

- Aluminium base and PMMA diffuser
- Pull cord on/off switch • Sleek modern design
- Primarily designed for bathrooms, but equally useful for many other applications
- 10W = 835 lumen output: low power consumption with enhanced life expectancy
- 3000K warm colour temperature: offering a pleasing lighting appearance • Earthed



V1

Code	Wattage	Colour Temp.	Lumens	Avg. Rated Life (Hrs)	IP Rating	MOM / OPQ
OMLED10	10W	3000K	835 lm	30,000 hrs	IP44	1 / 20

BATHROOM LIGHTING

POLISHED CHROME IP44 LED CEILING/WALL LIGHT



5
Year Warranty




Bathroom
Zone 2



This stylish fitting is ideal for installation in a multitude of situations. Ceiling or wall mounted in a domestic or commercial setting and suitable for bathrooms. Long life, energy efficient alternative to traditional fluorescent luminaires

- Steel construction • Polished chrome finish • Corrosion resistant stainless steel fixing screws
- Multiple low power LED array & optically optimised diffuser: ensures a soft, even lighting effect with no degradation of light output
- Suitable for bathroom use • Push fit terminals
- 3100K warm colour temperature: offering a pleasing light appearance
- Earthed



Code	Wattage	Colour Temp.	Lumens	Avg. Rated Life (Hrs)	IP Rating	MOM / OPQ
PACIFIC12	12W	3100K	800 lm	30,000 hrs	IP44	1 / 5

DIMMABLE COB LED RECESSED COLOUR TEMPERATURE SELECTABLE COMMERCIAL DOWNLIGHTS



5
Year Warranty



K
Colour Temp.
Selectable

Dimmable





Fire Rated



High performance, fire rated downlight with pre-wired plug in connector for easy installation and circuit integrity checks without fixture being connected

- Aluminium & polycarbonate construction
- Dimmable - for optimum dimming performance we recommend using a compatible LED dimmer
- Fire rated tested for individual 30, 60 and 90 min ceiling types
- Selectable colour temperature with warm, cool and daylight options
- Pre-wired with 20cm cable onto plug-in connector screw terminal block
- 4 terminal connector allows for loop in/out lighting circuits
- Silicon bezel seals against air permeability • 60° beam angle
- Double insulated • IES files available

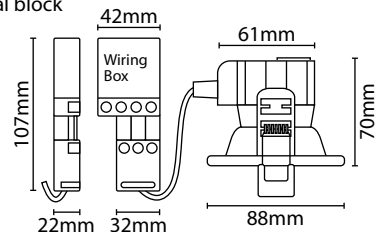

Code	Colour	Wattage	Colour Temp.	Lumens	Avg. Rated Life (Hrs)	IP Rating	Hole Cut Out Size	MOM / OPQ
IFIRELCSR	Polished Chrome	8W	3000K	670 lm	40,000 hrs	IP65	76mm	1 / 40
IFIRELCSN	Brushed Nickel		4000K	780 lm				
IFIRELCSWH	White		6000K	700 lm				

IP65 MAINS SHOWER LIGHT CONVERTERS


1
Year Warranty



Bathroom
Zone 1 & 2



- Steel construction
- Requires 1 x GU10 energy saving lamp (not included). Fitting is rated at 50W max
- Sprung bezel pulls off to facilitate easy lamp change
- Double insulated



Code	Colour	Wattage	IP Rating	Hole Cut Out Size	MOM / OPQ
SLGU CR	Polished Chrome	50W Max	IP65	70mm	5 / 50
SLGU SN	Brushed Nickel				
SLGU WH	White				

CABINET LIGHTING

Cabinet lighting creates an ambient atmosphere for your kitchen whilst maintaining its practicality.

Use our LED under cabinet lighting to direct light on worktops, keeping you safe whilst working with appliances and sharp objects.

Our LED cabinet light fittings can be easily utilised in many other applications where a subtle but powerful light is required in a covered dimly lit area.

VECOLT54 - T5 LED linkable fittings - Page 64



VECOABPTR
Triangle under
cabinet LED fitting
Page 64



CLEDCIRWH
Surface or recessed
LED fitting
Page 64



CLEDCIR
Surface or recessed
LED fitting
Page 64



CLEDTRI
Triangle under
cabinet LED fitting
Page 64

CABINET LIGHTING



LED SUPER FLAT STRIP LIGHTS




5
Year Warranty



Ultra low power consumption with excellent light output. The inclusion of a link lead and butt connector allows continuous linear, spaced linear or radial installations

V2

- Aluminium and polycarbonate construction
- Ultra-bright warm white LEDs for a pleasing lighting effect (3000K colour temperature)
- Reeded diffuser for soft diffused light
- Fixing clips included for under-cabinet or wall installation
- 300mm link lead and butt connector included: allowing flexible linking options • Double insulated




DRIVER:

- For use with SFLWW range only • Allows multiple strip lights to be linked
- Includes 0.5m mains cable & 2m fitting supply cable with amp-plug connector: easy installation
- Allows any combination of SFLWW9 & SFLWW15 upto a maximum power load of 36W: simply link the first fitting to the driver and subsequent fittings to each other

Code	Version	Rated Wattage	Colour Temp.	Lumens	Avg. Rated Life (Hrs)	IP Rating	MOM / OPQ	
SFLWW9	9 LED	2.2W	3000K	230 lm	20,000 hrs	IP20	1 / 10	
SFLWW15	15 LED	3.6W		360 lm				
SFLDR36	36W Constant Voltage Driver							1 / 20

LINEAR T4 LINKABLE TRIPHOSPHOR UNDER CABINET FITTINGS

1
Year Warranty

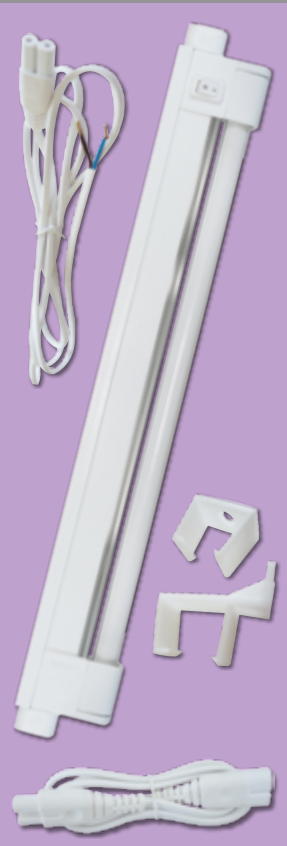


- **TUS6NL** requires 1 x 6W G5 T4 220mm fluorescent tube (included). Fitting is rated at 6W max
- **TUS10NL** requires 1 x 10W G5 T4 341mm fluorescent tube (included). Fitting is rated at 10W max
- **TUS16NL** requires 1 x 16W G5 T4 468mm fluorescent tube (included). Fitting is rated at 16W max
- **TUS20NL** requires 1 x 20W G5 T4 567mm fluorescent tube (included). Fitting is rated at 20W max
- Polycarbonate construction • Individual rocker switch • Link & light system compatible
- Incorporates plug and socket with through wiring: can be linked with up to 5 other fittings
- 2 metres link mains lead included • Double insulated

V1

REPLACEMENT LAMPS (N64 RANGE):

- Glass construction • Not dimmable
- Specifically designed for use with Eterna brand fittings



Code	Length	Wattage	Colour Temp.	Lumens	Avg. Rated Life (Hrs)	IP Rating	MOM / OPQ
TUS6NL	270mm	6W	3400K	378 lm	10,000 hrs	IP20	5 / 50
TUS10NL	390mm	10W		630 lm			
TUS16NL	520mm	16W		1090 lm			
TUS20NL	620mm	20W		1500 lm			
Replacement Lamps							
N64/1	220mm	6W	3400K	378 lm	10,000 hrs	IP20	10 / 200
N64/3	341mm	10W		630 lm			
N64/5	468mm	16W		1090 lm			
N64/7	567mm	20W		1500 lm			
Accessories							
NL1WH	1m	White Link Lead				IP20	5 / 200

CABINET LIGHTING

ECONOMY T5 LED LINKABLE FITTING




5

Year Warranty



- Polycarbonate construction • Rocker switch
- Superb light output and lighting effect: low power consumption with enhanced life expectancy
- 1.8m mains lead with 22cm link lead: linkable with up to 5 other fittings
- Optically optimised diffuser: ensures a soft diffused light with no degradation of light output • Double insulated



V1

Code	Wattage	Colour Temp.	Lumens	Avg. Rated Life (Hrs)	IP Rating	MOM / OPQ
VECOLT54	4W	4000K	350 lm	30,000 hrs	IP20	1 / 30
VECOLT58	8W		710 lm			
VECOLT510	10W		880 lm			
VECOLT514	14W		1240 lm			

LED SURFACE / RECESSED CABINET DOWNLIGHTS




5

Year Warranty



- Steel construction • Visually similar to 20W G4 halogen
- 3000K warm colour temperature: offering a pleasing lighting appearance
- 1.7W = 160 lumens: ideal low energy solution to standard halogen cabinet lights
- Not suitable for use with dimmers
- Pre-wired with 2m mains cable and no separate driver required: facilitating easy installation
- Mains voltage: integral driver • Double insulated



V1

Code	Colour	Wattage	Colour Temp.	Lumens	Avg. Rated Life (Hrs)	IP Rating	Hole Cut Out Size	MOM / OPQ
CLEDCIR	Nickel	1.7W	3000K	160 lm	30,000 hrs	IP20	61mm	1 / 40
CLEDCIRWH	White							

LED TRIANGLE CABINET DOWNLIGHT




5

Year Warranty



- Steel construction • Visually similar to 20W G4 halogen
- 3000K warm colour temperature: offering a pleasing lighting appearance
- 1.7W = 160 lumens: ideal low energy solution to standard halogen cabinet lights
- Not suitable for use with dimmers
- Pre-wired with 2m mains cable and no separate driver required: facilitating easy installation
- Mains voltage: integral driver • Double insulated



V1

Code	Wattage	Colour Temp.	Lumens	Avg. Rated Life (Hrs)	IP Rating	MOM / OPQ
CLEDTRI	1.7W	3000K	160 lm	30,000 hrs	IP20	1 / 40

PLASTIC LED UNDER CABINET LIGHTS




5

Year Warranty



- Polycarbonate construction
- 3000K warm white colour temperature: offering a pleasing lighting appearance
- 2W = 100 lumens: ideal low energy solution to standard halogen cabinet lights
- Pre-wired with 2m mains cable and no separate driver required: facilitating easy installation
- Not suitable for use with dimmers
- Not suitable for recessed installation • Double insulated

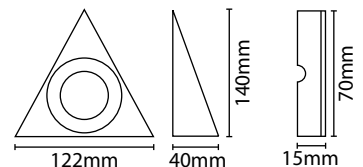

V1

Code	Version	Wattage	Colour Temp.	Lumens	Avg. Rated Life (Hrs)	IP Rating	MOM / OPQ
VECOBAPCI	Circular	2W	3000K	100 lm	30,000 hrs	IP20	1 / 100
VECOBAPTR	Triangle						

GARDEN LIGHTING & SPOTLIGHTING


VECOWLPIRW
Page 66



WGLED BK
Page 66



B1100BK NL
Page 66

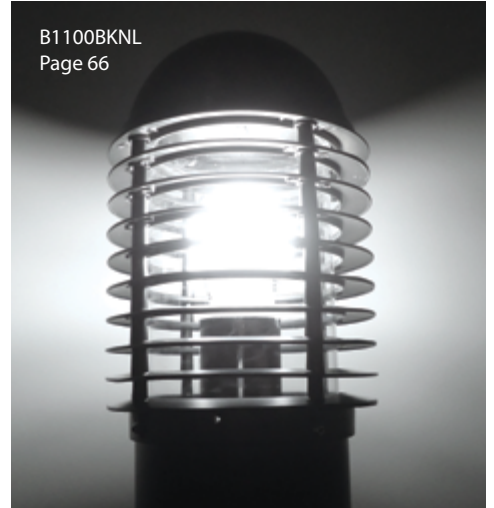

SPOTLEDGAR
Page 68




WLPPTWIN
Page 68



VECOWLG
Page 66



SLICELONG
Page 67

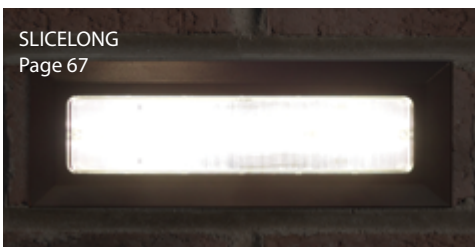

SPOT2CR
Page 69



WELLWHPIR
Page 66



LED CORNER FIXTURE FITTINGS



5
Year Warranty




Flexible and decorative range of fittings ideally suited for outdoor applications requiring corner lights

- Complete solution for flat wall or corner mounting: bracket included for optional corner mounting
- Double insulated

PIR VERSION:


- Factory preset 120° PIR • 10 lux - 7 minutes duration
- No override facility

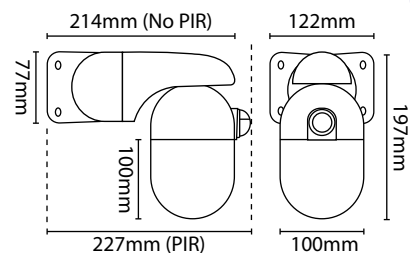

V1

Code	Colour	Version	Wattage	Colour Temp.	Lumens	Avg. Rated Life (Hrs)	IP Rating	MOM / OPQ
WELLWHSTD	White	Standard	10W	4000K	660 lm	25,000 hrs	IP65	1 / 6
WELLBKSTD	Black							
WELLWHPIR	White	120° PIR						
WELLBKPIR	Black							


LED CORNER FIXTURE FITTINGS

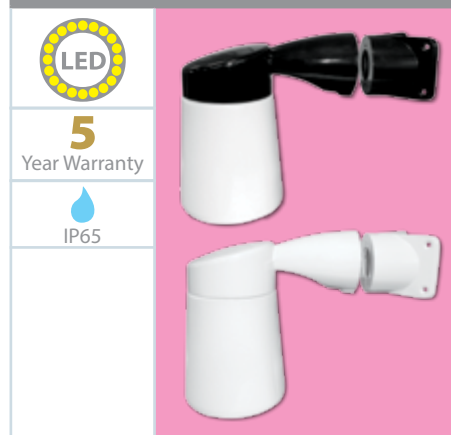

5
Year Warranty



- This luminaire is supplied with a 9W LED ES (E27) 'A' Shape lamp – maximum 23W
- Bracket included for optional corner mounting: complete solution for flat wall or corner mounting
- Aluminium alloy construction in white or black finish with white polycarbonate diffuser
- Low energy consumption and prolonged lamp life • BESA box mounting
- Lamp included - 1 year warranty • Earthed



V3

Code	Colour	Wattage	Colour Temp.	Lumens	Avg. Rated Life (Hrs)	IP Rating	MOM / OPQ
WGLED BK	Black	8.9W	2700K	810 lm	15,000 hrs	IP65	1 / 4
WGLED WH	White						
WELLDIFF	White Replacement Polycarbonate Diffuser						1 / 1

SURFACE LED WALL LIGHTS




5
Year Warranty



- Polycarbonate construction suitable for coastal areas • Opal diffuser • Integral driver • Double insulated
- Downward facing opal diffuser gives a pleasing wall washed effect • IES files available

PIR VERSIONS:


- PIR Time on adjustment 5 secs - 8 mins • 160° detection angle
- 8 meter detection range
- Lux level adjustments - option for day and night time operation or night time operation only



V1

Code	Colour	Version	Wattage	Colour Temp.	Lumens	Avg. Rated Life (Hrs)	IP Rating	MOM / OPQ
VECOWLW	White	Standard	6W	4000K	340 lm	30,000 hrs	IP65	1 / 20
VECOWLG	Grey							
VECOWLPIRW	White	160° PIR						
VECOWLPIRG	Grey							

1100MM LOUVRED BOLLARD

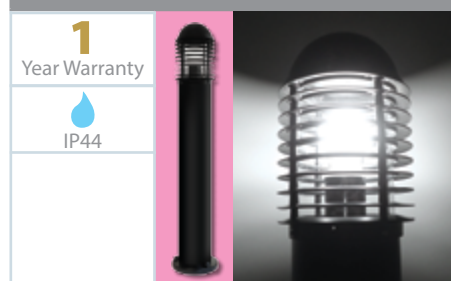


1
Year Warranty




- Requires 1 x ES (E27) lamp (not included). Fitting is rated at 100W max
- Aluminium construction
- Root or flange fixing: versatile installation options
- Louvred diffuser: discreet lighting effect
- Earthed

Code	Wattage	IP Rating	MOM / OPQ
B1100BKNL	100W Max	IP44	1 / 1



V1

GARDEN LIGHTING & SPOTLIGHTING

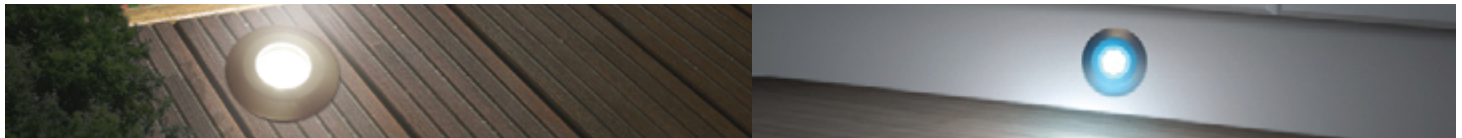


2W LED DECK / PLINTH LIGHT



Mains voltage LED compact recessed fixture equally useful for exterior use such as deck lighting, or for interior use recessed into plinths

V1

- Crisp white light or various colour effects using the included blue, red and green filters
- Hole cut out 40mm (if fitted without sleeve)
- Pre-wired with 1m rubber cable
- Complete with mounting sleeve for use in solid surfaces
- Anodized aluminium finish
- Double insulated



Code	Wattage	Colour Temp.	Lumens	Avg. Rated Life (Hrs)	IP Rating	Hole Cut Out Size	MOM / OPQ
DECKLED	2W	4000K	111 lm	20,000 hrs	IP65	40mm	1 / 50

GU10 DECK LIGHT WITH STAINLESS STEEL BEZEL




- Cast alloy body • Not suitable for immersion in water
- Requires 1 x suitable GU10 lamp (not included). Fitting is rated at 50W max
- Pre-wired with 1m of rubber cable to terminal box: easy installation with loop out facility from 3 way terminal box
- GU10 lampholder allows a variety of different light sources • Earthed

V1

LAMP GUIDE:

- T<40°C - ANY locations - 7W Max GU10 LED
- T<65°C - MOST locations - 9W Max GU10 CFL
- T>100°C - OUT OF REACH locations - 50W Max GU10 Halogen



Code	Wattage	IP Rating	Hole Cut Out Size	MOM / OPQ
GDL50SS	50W Max	IP68	92mm	4 / 24


LED SLIM SURFACE BRICKLIGHT



Superslim surface mounting mains voltage LED amenity fixtures for garden and path illumination, which offers a fantastic alternative to traditional bricklights without the hassle of recessed installation

V1

- ABS housing, polycarbonate diffuser
- Double insulated
- IES files available



Code	Wattage	Colour Temp.	Lumens	Avg. Rated Life (Hrs)	IP Rating	MOM / OPQ
SLICELONG	3W	4000K	188 lm	30,000 hrs	IP65	1 / 24
TRIMLONG	White Trim					


LED RECESSED BRICKLIGHT WITH STAINLESS STEEL FRAME



A modern design that gives an instant cool white light. Ultra low energy consumption and prolonged lamp life

V1

- Polycarbonate construction • Integral driver • Cable gland included
- Opal diffuser with optional stainless steel frame offering a soft, stylish lighting effect
- Hole cut out size: L: 228mm, D: 75mm, H: 98mm • Double insulated



Code	Wattage	Colour Temp.	Lumens	Avg. Rated Life (Hrs)	IP Rating	MOM / OPQ
BRICKLED	5.4W	6000K	280 lm	20,000 hrs	IP65	1 / 6

GARDEN LIGHTING & SPOTLIGHTING


EXTERNAL STAINLESS STEEL WALL LIGHTS

1
Year Warranty

IP44



- Requires: 1 x 35W Max. 240V GU10 halogen or LED lamp per lampholder (not included)
- Stainless steel construction
- Modern attractive design
- Easy lamp change
- Fully adjustable head (SSWLDIR only)
- Earthed

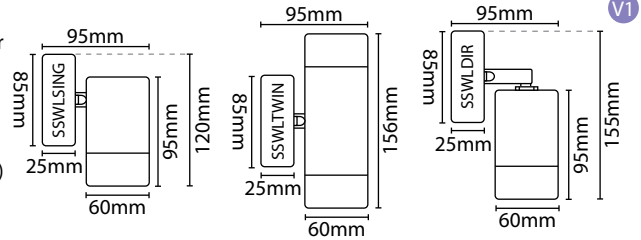

Code	Version	Wattage	IP Rating	MOM / OPQ
SSWLSING	Single Up Or Down Lighting	35W Max	IP44	1 / 12
SSWLTWIN	Twin Up & Down Lighting			
SSWLDIR	Single Directional Lighting			


EXTERNAL AMENITY WALL LIGHTS

1
Year Warranty

IP44



- Polypropylene construction
- Requires 1 or 2 x GU10 LED lamps (max 7W per lampholder)
- Double insulated

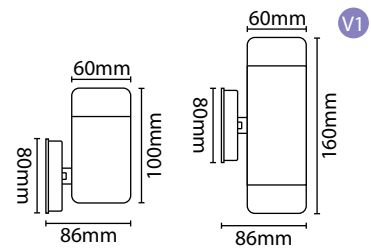

Code	Version	Wattage	IP Rating	MOM / OPQ
WLPPSING	Single Up Or Down Plastic Wall Light	7W Max	IP44	1 / 16
WLPPTWIN	Twin Up & Down Plastic Wall Light			

EXTERNAL ALUMINIUM LED WALL & GARDEN SPIKE SPOTLIGHTS


LED

5
Year Warranty

IP44



- Aluminium construction & frosted glass lens
- Integrated driver and LED light source
- Fully adjustable head
- **SPOTLEDGAR:** pre-wired with 1 metre of tough exterior grade mains lead
- Earthed

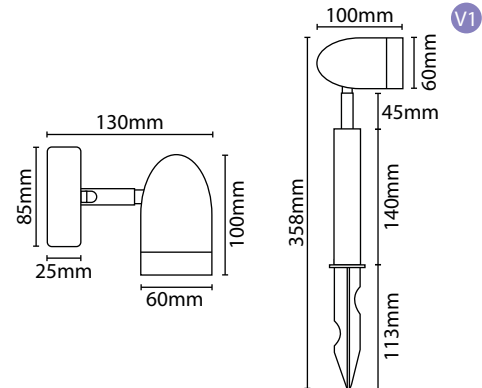

Code	Version	Wattage	Colour Temp.	Lumens	Avg. Rated Life (Hrs)	IP Rating	MOM / OPQ
SPOTLEDWAL	Wall	4.3W	4000K	240 lm	30,000 hrs	IP44	1 / 12
SPOTLEDGAR	Garden Spike						

SPOTLEDGAR



SPOTLEDWAL




INTERNAL GU10 STAINLESS STEEL SPOTLIGHTS

1

Year Warranty

V1

- Pressed steel construction
- Requires: 1 x 50W Max. 240V GU10 halogen or LED lamp per lampholder (not included)
- Contemporary design for a stylish interior spotlight solution
- Fully adjustable head(s): provides a fully adjustable directional light source • Earthed

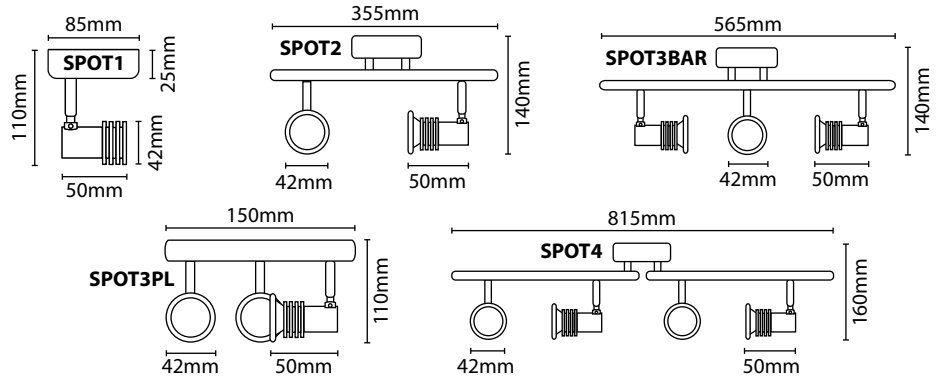

Code	Colour	Version	Wattage	IP Rating	MOM / OPQ			
SPOT1CR	Polished Chrome	Single	1 x 50W Max	IP20	1 / 36			
SPOT1SN	Brushed Nickel							
SPOT1WH	White							
SPOT2CR	Polished Chrome	Twin Bar	2 x 50W Max		IP20	1 / 12		
SPOT2SN	Brushed Nickel							
SPOT2WH	White							
SPOT3CRBAR	Polished Chrome	Triple Bar	3 x 50W Max			IP20	1 / 6	
SPOT3SNBAR	Brushed Nickel							
SPOT3WHBAR	White							
SPOT3CRPL	Polished Chrome	Triple Plate	3 x 50W Max				IP20	1 / 12
SPOT3SNPL	Brushed Nickel							
SPOT3WHPL	White							
SPOT4CR	Polished Chrome	Quad Split Bar	4 x 50W Max	IP20				1 / 12
SPOT4SN	Brushed Nickel							
SPOT4WH	White							

SPOT4SN shown



LANTERNS

VECOHPIRBK



VECOFBK



ALULANTPIR



PIRHL60WH



COMMON LANTERN IP RATINGS



IP44

The access probe of 1.0mm diameter shall not penetrate. Protected against water splashed from all directions. Limited ingress permitted.



IP65

Totally protected against the ingress of dust. Protected against jets of water. Limited ingress permitted.

LANTERNS

LED ALUMINIUM LANTERNS



5
Year Warranty




An aesthetically pleasing outdoor fitting with superior construction for domestic and commercial applications

- Die-cast aluminium construction • Polycarbonate diffuser
- Earthed

PIR VERSION:

- 7 metre detection range • 110° detection angle
- Time on adjustment 8 sec - 8 min • Lux level adjustment 5 lux - 2000 lux



Code	Version	Wattage	Colour Temp.	Lumens	Avg. Rated Life (Hrs)	IP Rating	MOM / OPQ
ALULANT	Standard	8W	4000K	570 lm	30,000 hrs	IP44	1 / 6
ALULANTPIR	110° PIR						

LED ECONOMY LANTERNS



5
Year Warranty




Energy efficient LED alternative to traditional lanterns

- Tough polycarbonate construction
- Double insulated

PIR VERSION:

- Time on adjustment 5 secs - 5 mins
- Lux level adjustments
- 120° detection angle
- 8 metre detection range

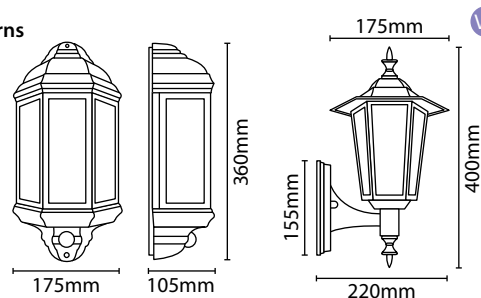

Code	Version	Wattage	Colour Temp.	Lumens	Avg. Rated Life (Hrs)	IP Rating	MOM / OPQ
VECOFBK	Standard Full Lantern	7W	3100K	420 lm	35,000 hrs	IP44	1 / 4
VECOPIRBK	120° PIR Full Lantern						
VECOHBK	Standard Half Lantern						1 / 10
VECOPIRBK	120° PIR Half Lantern						

POLYCARBONATE ES (E27) LANTERNS

1
Year Warranty





- Requires 1 x suitable ES lamp (not included). Fitting is rated at 60W max
- Polycarbonate construction: corrosion resistant
- One piece lens: quick and easy assembly
- Double insulated

HALF LANTERN PIR VERSIONS:

- 12 metre max detection range • Time on 3 minutes ± 20 sec
- 120° detection zone • Factory preset PIR - no override facility

FULL LANTERN PIR VERSION:

- 10 metre range with sensitivity adjustment control
- Time on adjustable (10±5) secs - (4±1) min • 110° detection zone
- Factory preset PIR - no override facility



Code	Colour	Version	Wattage	IP Rating	MOM / OPQ
HL60B	Black	Standard Half Lantern	60W Max	IP44	1 / 12
HL60WH	White				
PIRHL60BK	Black	120° PIR Half Lantern			
PIRHL60WH	White				
L60B	Black	Standard Full Lantern			
PIRL60BK	Black	110° PIR Full Lantern			

HAND DRYERS & HEATING

WINTER ESSENTIALS

During the cold months, an extra source of warmth can be very welcome for your customers coming in from the cold.

3KW SCREEN HEATER

SH3WH



2KW ADJUSTABLE DOWNFLOW HEATER WITH RUNBACK TIMER

DFHT2KW



HAND DRYERS & HEATING



HDA-1800



SSHDA-2500


1.8KW HIGH PERFORMANCE AUTOMATIC HAND DRYER

1
Year Warranty

IPX1



- Cast aluminium construction • Tough vandal resistant construction
- Automatic operation: reduced cleaning requirement & increase hygiene
- Adjustable proximity sensitivity: allows user preference for on switching
- Pre-wired with 1 metre of mains lead: easy installation • Earthed
- Air speed: 17.8m/sec: rapid hand drying • Airflow: 2.6m³/min.



Code	Wattage	IP Rating	MOM / OPQ
HDA-1800	1.8kW	IPX1	1 / 4


2.5KW HIGH PERFORMANCE AUTOMATIC HAND DRYER

1
Year Warranty

IPX1



- Cast aluminium tough vandal resistant construction
- Modern stainless steel effect finish
- Pre-wired with 1m of mains lead: easy installation • Earthed
- Automatic operation: reduced cleaning requirement & increased hygiene
- Airflow 4.5m³/min. • Air speed 30m/sec.: rapid hand drying




Code	Wattage	IP Rating	MOM / OPQ
SSHDA-2500	2.5kW	IPX1	1 / 4

TUBULAR HEATERS AND GUARDS

1
Year Warranty




- Steel construction • Thermal overload cut out • Earthed
- Pre-wired with 1m mains lead: easy installation
- Additional locking cable gland included for through wiring / linking to other tubular heaters
- Mounting brackets included for wall or floor installation
- Low wattage solution for localised background heat and frost protection

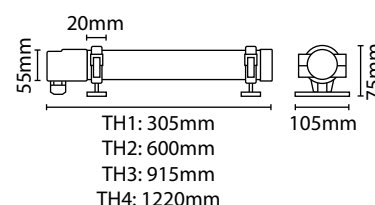

TUBULAR HEATER GUARD:

- Steel construction • Fixing kit included
- Robustly constructed wire guard: provides protection and safety
- Colour matches tubular heater
- Aesthetically pleasing curved design




Code	Version	Wattage	IP Rating	MOM / OPQ
Heaters				
TH1	1ft Heater	60W	IP44	1 / 20
TH2	2ft Heater	120W		1 / 12
TH3	3ft Heater	180W		1 / 9
TH4	4ft Heater	240W		1 / 6
Heater Guards				
TRG1FT	1ft Guard			2 / 18
TRG2FT	2ft Guard			2 / 12
TRG3FT	3ft Guard			2 / 6
TRG4FT	4ft Guard			2 / 6

2.4KW PLINTH FAN HEATER WITH 3 COLOUR FASCIAS

1
Year Warranty



- Pressed steel construction • Airflow 0.85m³/min • Earthed
- Three fascias included: brown, white & stainless steel: complete solution reducing stock requirements
- Thermostatically controlled with thermal cut out: controllable temperature point for economic operation
- Pre-wired with 1.5m of mains lead: easy installation • Rubber feet: assist quiet operation
- Three settings for flexible heat output to suit room size:
 - 8kW fan only operation - 1.6kW half heat and fan - 2.4kW full heat and fan




Code	Wattage	IP Rating	MOM / OPQ
PFH2400	2.4kW	IP20	1 / 4

3KW SCREEN HEATER

1
Year Warranty



- Pressed steel construction • Earthed
- Pre-wired with 1.25m mains lead: easy installation
- Airflow 1.07m³/min • Air speed 3m/sec
- Illuminated switch • Quiet running
- Three settings for flexible heat output to suit room size:
 - 2.5kW fan only operation - 1.5kW half heat and fan - 3kW full heat and fan



Code	Wattage	IP Rating	MOM / OPQ
SH3WH	3kW	IP20	1 / 1

2KW ADJUSTABLE DOWNFLOW HEATER


1
Year Warranty



IP21



- Thermoplastic construction • Up to 2kW heat output: fast heating
- Mains indicator light • Thermal cut out • Pull cord on/off switch
- Internal adjustable thermostat: controllable temperature point for economic operation
- Internal load switch 1kW / 2kW: allows output adjustment to suit room size
- Double insulated



HEATING SETTINGS:

I = 1kW fixed heat / II = 2kW variable thermostat controlled*

*Once desired temperature is met, fitting will drop down to 1kW - this fitting will not turn itself off

Code	Wattage	IP Rating	MOM / OPQ
DFH2KW	2kW	IP21	1 / 6

2KW ADJUSTABLE DOWNFLOW HEATER WITH RUNBACK TIMER


1
Year Warranty



IP21



- Fire retardant Polycarbonate & ABS construction • Double insulated
- Up to 2kW heat output: fast heating • Mains indicator light
- Pull cord on/off switch • Thermal cut out
- Internal load switch 1kW / 2kW: allows output adjustment to suit room size
- Up to 35 minute runback timer - adjustable upon installation



DIP SWITCH MODES OF OPERATION:*

- 1 - On position 1kW / Off position 2kW
- 2 - On position 5 minutes
- 3 - On position 10 minutes
- 4 - On position 20 minutes

*You can have multiple time dip switches selected at one time, this allows you to add the times together e.g dip switch 2 and 3 on = 15 minutes

Code	Wattage	IP Rating	MOM / OPQ
DFHT2KW	2kW	IP21	1 / 6

HAND DRYERS & HEATING


1.5KW OIL FILLED HEATER

1
Year Warranty



- Steel construction • Multi-directional castors
- 3 heat settings: 600W, 900W, 1.5kW
- Fitted with 1.5m flex with 13A plug top
- Integral cable and plug storage facility
- Illuminated control switches • Fully adjustable thermostat
- Over heat protection • Anti tip cut-out protection

NOTE: as with all portable heating appliances - this product is only suitable for well insulated spaces or occasional use



Code	Wattage	IP Rating	MOM / OPQ
OILHT157	1.5kW	IP20	1 / 1


2KW OIL FILLED HEATERS

1
Year Warranty



- Steel construction • Multi-directional castors
- 3 heat settings - 800W, 1.2kW, 2kW
- Fitted with 1.5m flex with 13A plug top
- Integral cable and plug storage facility
- Illuminated control switches • Fully adjustable thermostat
- Over heat protection • Anti tip cut-out protection

NOTE: as with all portable heating appliances - this product is only suitable for well insulated spaces or occasional use



Code	Version	Wattage	IP Rating	MOM / OPQ
OILHT211	Standard	2kW	IP20	1 / 1
OILHT211T	24 Hour Timer			


2KW CONVECTOR HEATERS

1
Year Warranty



- Steel construction • Built in carry handles
- Illuminated control switches
- 3 heat settings: 750W, 1.25kW, 2kW
- Fitted with 1.5m flex and 13A BS1363 moulded plug
- Fully adjustable thermostat • Over heat protection

NOTE: as with all portable heating appliances - this product is only suitable for well insulated spaces or occasional use and not suitable for wall mounting



Code	Version	Wattage	IP Rating	MOM / OPQ
CONVHTSTD	Standard	2kW	IP20	1 / 1
CONVHTFAN	Turbo Fan			
CONVHTTIM	24 Hour Timer			

All of our handy guides can be downloaded and printed from our website for **FREE**



LIGHTING CONTROLS

PIR SENSORS

When a moving object or person moves across the PIR's detection zone, the PIR will trigger the motion sensor to activate the linked light source

PHOTOCELLS

When a light source is controlled by a photocell, then the light is only activated during the Lux level and time selected

MW SENSORS

Have the same capability as PIR sensors with the added control of detecting movement over various temperatures and can cover much larger areas such as warehouses

TIME DELAY SWITCHES

These are useful in areas where lights are inadvertently left on. These switches allow the lights to be on for a set period of time only

LIGHTING CONTROLS FOR ADDED SECURITY

Lighting controls are a great cost effective way to add extra security to your building. Lighting controls are a great way to only trigger the light output when necessary instead of keeping the lights on at all times.

LIGHTING CONTROLS



All products have an install guide that can be downloaded from each individual products' website page, please refer to this for extra settings and installation information on your product.

STAND ALONE INTERNAL 360° PIR SENSOR


1
Year Warranty



360° PIR



- Polycarbonate construction • Double insulated
- 1600W incandescent, 500W fluorescent load capacity
- Max. 200W LED load capacity (no more than eight lights)
- Adjustable lux level • Time on adjustable: 10 sec - 15 min
- 4.5 metre radius range • 360° detection zone



Code	IP Rating	MOM / OPQ
SA360PIR	IP20	1 / 50

FLUSH MOUNTED 360° INTERNAL PIR DETECTOR

1
Year Warranty




IPX4



360° PIR



- Polycarbonate construction • Double insulated
- Time on adjustable: 10 sec - 15 min • Adjustable lux level
- 4.5 metre detection zone • 360° detection area
- Max 2000W incandescent / 500W fluorescent load capacity Max 250W LED load capacity (no more than eight lights)
- Recessed spring clip flush fixing: nonobtrusive when installed



Code	IP Rating	Hole Cut Out Size	MOM / OPQ
PIRFM360	IPX4	63mm	1 / 4

IP44 EXTERNAL 360° PIR DETECTOR

1
Year Warranty




IP44



360° PIR



- ABS construction • Double insulated
- Vertically & horizontally adjustable PIR head
- Bracket included for optional corner mounting: versatile installation options to suit a wide range of requirements
- 1000W incandescent lamp / 300W fluorescent / 150W LED (no more than eight lights) load capacity
- Time on adjustable: 5 sec - 5 min • 12 metre detection area
- Adjustable lux level • 360° detection zone



Code	IP Rating	MOM / OPQ
EX360PIRWH	IP44	1 / 20

EXTERNAL PIR DETECTORS

1
Year Warranty




IP44



110°/180° PIR



- ABS construction • Double insulated
- Time on adjustable: 5 sec - 5 min
- Vertically & horizontally adjustable detector
- 1000W incandescent / 300W fluorescent maximum load capacity
- Maximum 200W LED load capacity (no more than eight lights)
- 110° / 180° detection zone
- Adjustable lux level • 12 metre range

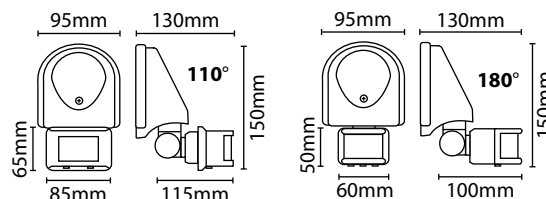

Code	Colour	Version	IP Rating	MOM / OPQ
PIR110BK	Black	110° PIR	IP44	1 / 30
PIR180BK	Black	180° PIR		
PIR180WH	White	180° PIR		


LIGHTING CONTROLS

TIME DELAY PUSH SWITCH

1
Year Warranty



- ABS construction • Red neon switch perimeter glow light
- Compatible with LED, fluorescent and incandescent loads
- Three load settings - 5-20W, 20-150W, 150-300W
- No neutral connection required: can replace existing switch with no additional wiring
- Time on adjustable between 12 seconds and 12 minutes
- Double insulated




Code	IP Rating	MOM / OPQ
PUSHLED	IP20	1 / 40

ELECTRONIC TIME DELAY PUSH SWITCH

1
Year Warranty



- ABS construction • Max load rating: 6 Amp incandescent 1440W
- Time on adjustable between 12 seconds and 12 minutes
- Red neon switch perimeter glow light: easy location of switching point
- No neutral connection required: can replace existing switch with no additional wiring
- Not Compatible With LED - See Eterna product above: **PUSHLED**
- Double insulated



Code	IP Rating	MOM / OPQ
TLS1440	IP20	5 / 40

16 AMP ELECTRONIC OUTDOOR TIME DELAY SWITCH


1
Year Warranty



IP66



- ABS construction • Double insulated
- Multiple accurate time settings using dip switches and rotary adjuster
- Incandescent 16 Amp max, fluorescent 6 Amp max, compact fluorescent 3 Amp max (maximum six fluorescent lights), low voltage 3 Amp max & fans and ventilation equipment 3 Amp max
- Multi point switching, connect two or more units in parallel
- Multi range delay function from 2 seconds to 2 hours: reduces energy consumption




Code	IP Rating	MOM / OPQ
TLS68EX	IP66	1 / 50

PUSH TO BREAK AUTOSWITCH

1
Year Warranty



- Momentary push switch: push to break contacts
- Thermoplastic construction
- Switching 1 Amp max (250V)
- Max. 25W LED load capacity
- Double insulated



Code	IP Rating	MOM / OPQ
XS63W	IP20	10 / 600

ADD-ON PIR SENSOR FOR ETERNA LED BATTENS


1
Year Warranty



100° PIR



- Robust polycarbonate construction • Double insulated
- Time-on adjustable: 30 secs, 3 mins, 5 mins, 8 mins
- Night & day or night only options selectable
- Detection range 3-6 metres • 100° detection area
- See Eterna LED batten range on page 40



Code	IP Rating	MOM / OPQ
BATLEDPIR	IP20	1 / 6

LIGHTING CONTROLS

MICROWAVE SENSOR

1
Year Warranty


IP65

Microwave
Sensor




This sensor can either be wired directly into an existing fitting providing there is sufficient space to do so or alternatively it can be installed inside a separate unobtrusive enclosure, see Eterna part code MWCASE

- Polycarbonate construction • Double insulated
- Rated Load - 800W (resistive), 400W (inductive), 270W (LED)
- Adjustable detection angle: up to 150°
- Power consumption: <0.5W
- Adjustable detection range: Max. 6m
- Adjustable time setting: 5 seconds - 30 minutes
- Adjustable Lux control: 2-50 lux
- Push connect terminals: for ease of connection



CASE:

- Polycarbonate construction
- Compact & discreet design: for housing Eterna part code SENSORMW
- IP65, ceiling or wall mounted: giving versatile fixing options, suitable for bathroom, internal and external use
- Supplied with two mounting screws to install SENSORMW and has 2 x 20mm gland entry holes: facilitating easy installation
- Screw fit cover to maintain IP rating, with clip on bezel: meaning enclosure cannot be tampered with easily



Code	Version	IP Rating	MOM / OPQ
SENSORMW	Sensor	-	1 / 150
MWCASE	Case	IP65	1 / 100


REMOTE FIXING MINIATURE PHOTOCELL

1
Year Warranty

Photocell



- Wired for remote fixing: ultra compact sensor head allows incorporation where space is extremely limited
- 1500VA / 5 Amp inductive load, Max 500W LED • Double insulated
- Thermoplastic construction • Switch on/off at 30/80 lux
- The cable gland fixing around the photocell can maintain up to IP65 dependant on the enclosure it is installed into



Code	Hole Cut Out Size	IP Rating	MOM / OPQ
EMPCR	20mm	IP20	1 / 5

NEMA SOCKET ELECTRONIC PHOTOCELL KIT


1
Year Warranty

Photocell

IP44



- Thermoplastic construction • Double insulated
- Electronic operation: improved accuracy over thermal types
- Supplied complete with mounting bracket and gasket
- 1500VA or 5 Amp inductive load at 60MFD • Max LED load: 1000W
- Switch on/off at 30/70 lux



Code	IP Rating	MOM / OPQ
NPCHKIT	IP44	1 / 5

EXTERNAL PHOTOELECTRIC SWITCH


1
Year Warranty

Photocell

IP44



- ABS construction • Double insulated
- Switching level adjustable between approx. 5-300 lux
- 10 Amp resistive, 3 Amp inductive load
- Run back timer adjustable to stay on between 1-8 hours after switch on: flexibility in operation for economic running costs
- Maximum 250W LED load capacity (no more than eight lights)



Code	IP Rating	MOM / OPQ
RDT10A	IP44	1 / 5

ACCESSORIES & LAMPS

ELECTRICAL ACCESSORY ESSENTIALS

Eterna provide all your basic lighting accessory essentials for most domestic premises. Our products are suitable for both refurb and new installations. Our products are all tested for safety and are manufactured to the highest standards to ensure safety and compliance with the latest regulations.




WIRED SURFACE MOUNTED BELL PUSH & ILLUMINATED OPTION

1
Year Warranty



This product is designed for domestic installation up to 15m range

- Polycarbonate construction • Concealed fixing holes
- Interchangeable black and white covers included: flexible solution - reduced stock requirements



Code	Version	IP Rating	MOM / OPQ
BPWB	Standard	IP20	10 / 400
BPLWB	Illuminated		

FAQ

Q) Can multiple bell pushes be wired together?
A) Yes, additional pushes must be connected in parallel

FAQ

Q) Can you use one push button to control two chimes?
A) No

FAQ

Q) Can this work on 240V?
A) No, this needs connection via a transformer

FAQ

Q) What is the maximum length of wire between the push button and transformer?
A) Approx. 15 metres


DOOR CHIME WITH BUILT-IN TRANSFORMER

1
Year Warranty



This product is designed for domestic installation up to 15m range

- Integral transformer: neater, faster installation
- ABS construction • Modern design



Code	IP Rating	MOM / OPQ
TCWH	IP20	5 / 20

FAQ

Q) Can this be used to run a second bell chime?
A) No, this is a stand-alone unit

FAQ

Q) How loud is TCWH?
A) Approx. 80dB at one metre


BATTERY / TRANSFORMER OPERATED CHIME

1
Year Warranty



This product is designed for domestic installation up to 15m range

- ABS construction • Modern design
- Battery operation for non illuminated bell pushes
- Requires 4x 1.5V R14 'C' batteries (not included)
- Must be transformer operated for illuminated bell pushes (transformer not included - see BT4812)



Code	IP Rating	MOM / OPQ
DC1WH	IP20	5 / 20

FAQ

Q) How loud is DC1WH?
A) Approx. 60dB at one metre + the volume CANNOT be increased

FAQ

Q) Can you link two DC1WH units to the same transformer?
A) No

FAQ

Q) Can this be used with a lit bell push?
A) Yes, please use a transformer unit when using with an illuminated bell push, as the light will drain the batteries


MULTI VOLTAGE BELL / CHIME TRANSFORMER

1
Year Warranty



This product is designed for domestic installation up to 15m range

- Nylon construction • 1 Amp rated • Thermal cut out
- Double insulated: no earth connection required
- 4, 8 and 12V tappings: suits most bells and chimes



Code	IP Rating	MOM / OPQ
BT4812	IP20	5 / 60

FAQ

Q) What is the maximum length of bell wire that can be used to connect the transformer to the door chime?
A) Approx. 15 metres

FAQ

Q) Can multiple chimes / sounders be connected to BT4812?
A) No

FAQ


Q) How do you adjust the output voltage?
A) This has 4V, 8V, or 12V options as detailed in the install guide which can be downloaded from the website

METALCLAD TWIN UNSWITCHED RCD SOCKET

1
Year Warranty



- Trip speed less than 40mS (typical) • Earthed
- Passive operation - mechanically latched (no need to reset after power loss)
- Pressed steel construction • 13 Amp rated • 30mA trip current




Code	IP Rating	MOM / OPQ
TWSRCDMC	IP20	5 / 30

TWIN UNSWITCHED AC RATED RCD SOCKET

1
Year Warranty



- Trip speed less than 40mS (typical) • Earthed
- Passive operation - mechanically latched (no need to reset after power loss)
- Urea construction • 13 Amp rated • 30mA trip current




Code	IP Rating	MOM / OPQ
TWSRCDWH	IP20	5 / 40

SINGLE FUSED RCD SPUR

1
Year Warranty



- Trip speed less than 40mS (typical) • Earthed
- Twin earth terminals: easy cable connections
- Passive operation - mechanically latched (no need to reset after power loss)
- Urea construction • 13 Amp rated • 30mA trip current




Code	IP Rating	MOM / OPQ
SSRCDWH	IP20	5 / 60

CONVERTER SOCKET 1 GANG TO 2 GANG

1
Year Warranty



- Conversion of 1 gang to 2 gang socket: simple retrofit solution where extra outlets are required
- Tough polycarbonate construction: impact resistant
- Earthed




Code	IP Rating	MOM / OPQ
CONVERT2	IP20	5 / 100

CONVERTER SOCKET 1 OR 2 GANG TO 4 GANG

1
Year Warranty



- Conversion of 1 or 2 gang to 4 gang socket
- 13 Amp fused
- Tough polycarbonate construction
- Surge Protection • Earthed



Code	IP Rating	MOM / OPQ
CONVERT4	IP20	5 / 40

CONVERT4 has surge protection - What is a surge protector and its function?

A surge protector is an electrical device that is used to protect equipment against power surges and voltage spikes while blocking voltage over a safe threshold (approximately 120V). When a threshold is over 120V, a surge protector shorts to ground voltage or blocks the voltage. This makes the CONVERT4 perfect for office environments where lots of IT equipment is installed.



ACCESSORIES & LAMPS


WATERPROOF ACCESSORY BOXES

1
Year Warranty


IP65



- Maintains IP integrity when cable in use: added safety while load is connected
- Lockable facility (security tag not included): for tamperproof installation
- Polycarbonate construction: tough, impact & corrosion resistant
- **SSBE** accepts standard 1 gang accessory & **TWSBE** accepts standard 2 gang accessory : flexible solution allowing a multitude of different uses



Code	Version	IP Rating	MOM / OPQ
SSBE	1 Gang	IP65	5 / 45
TWSBE	2 Gang		5 / 20

PLASTIC ADAPTABLE WATERPROOF BOXES / ENCLOSURES

1
Year Warranty


IP65 / IP54




- ABS construction
- Mounting plate available: allows easy fixing in the enclosure whilst maintaining IP rating
- Lockable door: added security (security tag not included)

MOUNTING BACK PLATE:

- Designed for use with the waterproof enclosures: allows easy fixing in the enclosure whilst maintaining IP rating

Code	Version	Inside Measurements W/H/D	IP Rating	MOM / OPQ
JSL242	Small Enclosure	322 x 275 x 170mm	IP65	1 / 1
JSL244	Large Enclosure	422 x 380 x 170mm	IP55	
JSL242BP	JSL242 Backplate			1 / 25
JSL244BP	JSL244 Backplate			



PLASTIC ADAPTABLE BOXES / ENCLOSURES

1
Year Warranty


IP54 / IP65



- 397/5**
- Nylon with fibre glass construction • Large terminals: easy connections
 - 5 pole connector compatible with 220-L & 222-L

- All boxes - PP Copolymer construction

220-L


- Press on cover: rapid cover fixing
- Locating holes for 5 pole connector 397/5: easy connection facility

222-L


- ¾ turn twist lock screw down cover: rapid cover fixing
- Locating holes for 5 pole connector 397/5: easy connection facility

223-L / 224-L / 225-L

- ¾ turn twist lock screw down cover: rapid cover fixing

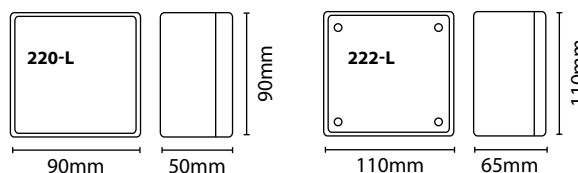

Code	Inside Measurements (Includes Space Inside The Lid)	IP Rating	MOM / OPQ
397/5	N/A	-	1 / 200
220-L	80x80x43mm	IP54	10 / 100
222-L	100x100x55mm	IP65	6 / 102
223-L	175x110x66mm		1 / 45
224-L	220x170x115mm		2 / 14
225-L	190x150x70mm		1 / 29

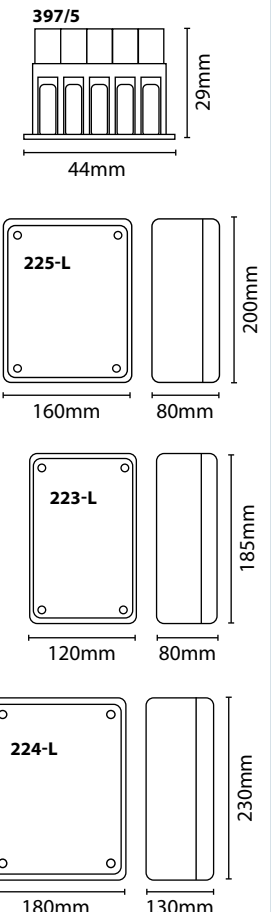


TRS GLANDS WITH LOCKING NUT

1
Year Warranty



- Glass filled nylon • Fire retardant to 850°C
- **20mm** accommodates 8-13mm cable
- **25mm** accommodates 12-18mm cable
- Supplied complete with lock nut




Code	Colour	Hole Ø	IP Rating	MOM / OPQ
20TRSBK	Black	20mm	IP68	100 / 1500
20TRSG	Grey			
20TRSWH	White			
25TRSG	Grey	25mm		20 / 800

LIGHTING CONNECTOR BOXES

1
Year Warranty



- Polypropylene case • Earthed
- Cord restraint at both entries
- **CB5A** = 5 Amp 3 way connector included
- **CB15A** = 15 Amp 3 way connector included

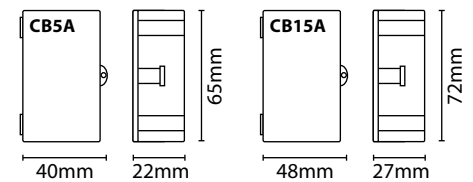


Code	Version	IP Rating	MOM / OPQ
CB5A	5 Amp	IP20	20 / 400
CB15A	15 Amp		

IP68 WATERPROOF ELECTRICAL CONNECTOR

1
Year Warranty



- Nylon construction • 3 Pole Connector
- 450V 32A rated • Cable size 0.5mm² - 4mm²



Code	IP Rating	MOM / OPQ
IPCONNECT	IP68	1 / 500


PLUG IN TERMINAL BLOCK

1
Year Warranty



- Nylon construction • Screw terminal connections
- 4 terminal connector to allow for loop in/out lighting circuits
- Earthed

Code	IP Rating	MOM / OPQ
PTBLOCK	IP20	1 / 300




PUSH TO BREAK AUTOSWITCH

1
Year Warranty



- Momentary push switch: push to break contacts
- Thermoplastic construction
- Switching 1 Amp max (250V)
- Max. 25W LED load capacity • Double insulated

Code	IP Rating	MOM / OPQ
XS63W	IP20	10 / 600




ACCESSORIES & LAMPS

PLUG IN CEILING ROSE

1
Year Warranty



- Urea construction • 6 Amp rating 4 terminal • BESA box mounting • Earthed
- Shrouded plug terminals and cord grip: complies with 2.2kg load test
- 4 terminals as standard offering extra live connection: ideal for emergency auxiliary use



CR10PW:

- Pre-wired with 2 metres of heat resistant 4 core flex: time saving, easy installation



Code	Version	IP Rating	MOM / OPQ
CR10	Un-wired	IP20	10 / 180
CR10PW	Pre-wired		10 / 60

SPARE LAMPHOLDERS

1
Year Warranty



- **AWFO8:** Silicon braided cable: heat resistant




Code	Colour	Version	IP Rating	MOM / OPQ
GU10LH	Black	GU10	IP20	5 / 200
AWFO8	White	GU5.3 LV		10 / 250

G5 T4 FLUORESCENT TUBES FOR ETERNA TUS RANGE

1
Year Warranty



- Glass construction • Not dimmable
- Specifically designed for use with Eterna brand fittings



Code	Length	Wattage	Colour Temp.	Lumens	Avg. Rated Life (Hrs)	MOM / OPQ
N64/1	220mm	6W	3400K	378 lm	10,000 hrs	10 / 200
N64/3	341mm	10W		630 lm		
N64/5	468mm	16W		1090 lm		
N64/7	567mm	20W		1500 lm		


DD CFLNI LAMPS

1
Year Warranty




Standard size energy efficient compact fluorescent lamp used in many commercial & decorative luminaires

- Glass construction
- Not dimmable

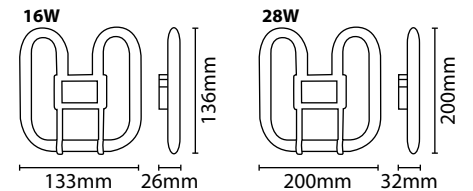



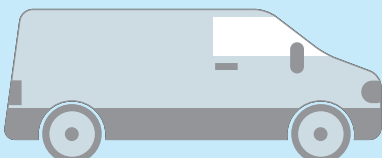
























Code	Wattage	Cap Type	Colour Temp.	Lumens	Avg. Rated Life (Hrs)	MOM / OPQ
DD16435	16W	GR10q 4 Pin	3500K	1100 lm	10,000 hrs	10 / 10
DD28435	28W			2050 lm		










We always have high levels of stock availability and most stock is available for next day delivery

For more information on collection or delivery, please see our website

DISCONTINUED LINES - CALL OURS SALES TEAM FOR DISCOUNTED PRICES

LAMPS		
	470CANBC	BC LED Candle 5.5W 470 lm 2700K 15,000 hrs
	470GOLFES	ES LED Golf Ball 5.5W 470 lm 2700K 15,000 hrs
	470GOLFSES	SES LED Golf Ball 5.5W 470 lm 2700K 15,000 hrs
	A470ES	ES LED A Shape 6W 470 lm 2700K 20,000 hrs
	A60L960ES	ES LED A Shape 10.5W 960 lm 3000K 15,000 hrs
	ALED800ES	ES LED A Shape 9W 800 lm 2700K 15,000 hrs
	AR10024	24° AR111 2800K 100W 12V G53 M152 2,000 hrs
	AR1008	8° AR111 2800K 100W 12V G53 M114 2,000 hrs
	AR758	8° AR111 2800K 75W 12V G53 M102 2,000 hrs
	C25ESCL	ES Clear Incandescent 25W 220 lm 1,000 hrs
	C400BC	BC LED Candle 5W 400 lm 2700K 20,000 hrs
	CAN470SBC	SBC LED Candle 5.5W 470 lm 2700K 15,000 hrs
	D1040EB	10W 4000K G24D-1 2 Pin Double Turn CFL 600 lm 10,000 hrs
	D1840EB	18W 4000K G24D-1 2 Pin Double Turn CFL 1210 lm 10,000 hrs
	D2640EB	26W 4000K G24D-1 2 Pin Double Turn CFL 1720 lm 10,000 hrs
	CFL23W	ES 23W 6400K Half Spiral 1371 lm 10,000 hrs
	DD16435	DD GR10q 4 Pin 16W 3500K 1100 lm 10,000 hrs
	DD28435	DD GR10q 4 Pin 28W 3500K 2050 lm 10,000 hrs
	DE1040EB	10W 4000K G24Q-1 4 Pin Double Turn D-E CFL 600 lm 10,000 hrs
	DE1840EB	18W 4000K G24Q-2 4 Pin Double Turn D-E CFL 1210 lm 10,000 hrs
	DLC470BC	BC LED Dimmable Candle 5.5W 470 lm 2700K 15,000 hrs
	GB7SBC27	BC Fluorescent Round 7W 330 lm 2700K 10,000 hrs
	GLS20ES27	ES Fluorescent GLS 20W 1152 lm 2700K 10,000 hrs
	GLS9ES27	ES Fluorescent GLS 9W 405 lm 2700K 8,000 hrs
	HS20ES27	ES Fluorescent Half Spiral 20W 1260 lm 2700K 10,000 hrs
	HS7SBC27	ES Fluorescent Half Spiral 7W 330 lm 2700K 10,000 hrs
	LE2440EB	24W 4000K 2G114 Pin Single Turn L CFL 1800 lm 10,000 hrs
	LE4040EB	40W 4000K 2G114 Pin Single Turn L CFL 3320 lm 10,000 hrs
	LE5540EB	55W 4000K 2G114 Pin Single Turn L CFL 4510 lm 10,000 hrs
	LEDGX4	4W LED Retrofit GX53 3000K 250 lm 30,000 hrs 120°
	LEDGX5	5W LED Retrofit GX53 3000K 470 lm 15,000 hrs 120°
	P15SBCCL	SBC 15W Pygmy Incandescent 105 lm 1,000 hrs
	P25BCCL	BC 25W Pygmy Incandescent 220 lm 1,000 hrs
	RL25SBCCL	SBC 25W Round Incandescent 220 lm 1,000 hrs
	RL40SBCCL	SBC 40W Round Incandescent 400 lm 1,000 hrs












	S1135EB	11W 3500K G23 2 Pin Single Turn S CFL 900 lm 10,000 hrs
	S735EB	7W 3500K G23 2 Pin Single Turn S CFL 405 lm 10,000 hrs
	T1835	18W T8 Triphosphor Fluorescent Tube G13 3500K 1350 lm 15,000 hrs
	T1840	18W T8 Triphosphor Fluorescent Tube G13 4000K 1350 lm 15,000 hrs
	T3635	36W T8 Triphosphor Fluorescent Tube G13 3500K 3350 lm 15,000 hrs
	T5835	58W T8 Triphosphor Fluorescent Tube G13 3500K 5250 lm 15,000 hrs
	T52135T	21W T5 Triphosphor Fluorescent Tube G5 3500K 1865 lm 20,000 hrs
	T52835T	28W T5 Triphosphor Fluorescent Tube G5 3500K 2585 lm 20,000 hrs
	TE1340EB	13W 4000K GX24Q-1 4 Pin Triple Turn T/E CFL 810 lm 10,000 hrs
	TE1840EB	18W 4000K GX24Q-1 4 Pin Triple Turn T/E CFL 1210 lm 10,000 hrs
CEILING/WALL		
	CF16CR	Chrome 2D Lamp Incl 16W 3500K 1100 lm 10,000 hrs IP65
	CF28WH	White 2D Lamp Incl 16W 3500K 1100 lm 10,000 hrs IP65
	CFLEDCREM3	Chrome LED EM3 18.5W 3100K 1200 lm 40,000 hrs IP65
	CO12SCPC	White LED photocell 12W 4200K 1200 lm 35,000 hrs IP65
	CO18PC	White LED Photocell 18W Colour Temp Selectable 35,000 hrs IP65
	LEDOVALMW	Black LED MW 13W 4200K 1100 lm 35,000 hrs IP54
	MWSLIMLCR	Chrome LED MW Slim 80mm Depth 14W 4200K 1100 lm 35,000 hrs IP65
	OF16OP	16W Opal Diffuser DD Lamp Incl 3500K 1100 lm 10,000 hrs IP65
	OF28OP	28W Opal Diffuser DD Lamp Incl 3500K 2050 lm 10,000 hrs IP65
	SDCFLEDCR	Chrome LED Step Dim MW 18.5W 3100K 1200 lm 40,000 hrs IP65
	SDCFLEDWH	White LED Step Dim MW 18.5W 3100K 1200 lm 40,000 hrs IP65
	T5LED10	White LED 10W 3000K 900 lm 25,000 hrs 908mm Linkable Strip Light
	T8LED16	Silver LED Batten 16W 4000K 1280 lm 20,000 hrs 900mm / 3ft
	T8LED20	Silver LED Batten 20W 4000K 1600 lm 20,000 hrs 1200mm / 4ft
	T8LED24	Silver LED Batten 24W 4000K 2100 lm 20,000 hrs 1500mm / 5ft
	CPRIS	Prismatic Diffuser for CO18, CO12 Ranges
DOWNLIGHTS		
	COMDL15	White LED Recessed Downlight 15W 4000K 1705 lm 30,000 hrs IP20
	COMDL25	White LED Recessed Downlight 25W 4000K 2400 lm 30,000 hrs IP20
	COMDL40	White LED Recessed Downlight 40W 4000K 3500 lm 30,000 hrs IP20
	COMRCS15	White LED Recessed Downlight 15W Col. Temp. Selectable 45,000 hrs IP54
	COMRCS25	White LED Recessed Downlight 25W Col. Temp. Selectable 45,000 hrs IP54
	COMRCS35	White LED Recessed Downlight 35W Col. Temp. Selectable 45,000 hrs IP54
	FIRETILTSN	Satin Nickel 50W Max GU10 Fire Rated Tilt Downlight
	FIRETILTWH	White 50W Max GU10 Fire Rated Tilt Downlight

DISCONTINUED LINES - CALL OURS SALES TEAM FOR DISCOUNTED PRICES

	FRLVCR	Chrome Fire Rated Downlight Lamp Incl 50W 12V GU5.3 MR16 2700K
	FRLVSN	Satin Nickel Fire Rated Downlight Lamp Incl 50W 12V GU5.3 MR16 2700K
	SFRML	Chrome Body GU10 Fire Rated Downlight LED Lamp Incl Trims Below
	SFRTCR	Chrome trim for SFRML
	SFRTSN	Satin Nickel trim for SFRML
	SFRTWH	White trim for SFRML
	VECOIFIRE3	3 x Col Trims Incl Fire Rated Downlight LED 5W 3000K 36,000 hrs IP65
	VECOIFIRE4	3 x Col Trims Incl Fire Rated Downlight LED 5W 4000K 36,000 hrs IP65
	VECORDL12	White LED Recessed Downlight 12W 4000K 1200 lm 25,000 hrs
	VECORDL24	White LED Recessed Downlight 24W 4000K 2400 lm 25,000 hrs
	VECORDL6	White LED Recessed Downlight 6W 4000K 480 lm 25,000 hrs
FLOODLIGHTS & LANTERNS		
	ELEDFLD30	Black 30W 4000K 2200 lm 30,000 hrs IP65
	FL124B	Black ES CFLi Lamp Incl 23W 6400K 1371 lm 10,000 hrs IP44
	FL157B	Black GX24q-5 triple turn T 4 pin CFL Incl 57W 6400K 4275 lm 16,000 hrs IP65
	FLD10BK	Black LED 10W 4000K 800 lm 25,000 hrs IP65
	FLD10PIRBK	Black LED 10W 4000K 800 lm 25,000 hrs IP44 120° PIR
	FLD10PIRWH	White LED 10W 4000K 800 lm 25,000 hrs IP44 120° PIR
	FLD10WH	White LED 10W 4000K 800 lm 25,000 hrs IP65
	FLD20BK	Black LED 20W 4000K 1600 lm 25,000 hrs IP65
	FLD20PIRBK	Black LED 20W 4000K 1600 lm 25,000 hrs IP44 120° PIR
	FLD20PIRWH	White LED 20W 4000K 1600 lm 25,000 hrs IP44 120° PIR
	FLD20WH	White LED 20W 4000K 1600 lm 25,000 hrs IP65
	FLD30BK	Black LED 30W 4000K 2400 lm 25,000 hrs IP65
	FLD30PIRBK	Black LED 30W 4000K 2400 lm 25,000 hrs IP44 120° PIR
	FLD30PIRWH	White LED 30W 4000K 2400 lm 25,000 hrs IP44 120° PIR
	FLD30WH	White LED 30W 4000K 2400 lm 25,000 hrs IP65
	FLD50BK	Black LED 50W 4000K 4000 lm 25,000 hrs IP65
	FLD50PIRWH	White LED 50W 4000K 4000 lm 25,000 hrs IP44 120° PIR
	FLD50WH	White LED 50W 4000K 4000 lm 25,000 hrs IP65
	FOCUS20	Grey LED 20W 4200K 1500 lm 25,000 hrs IP54 Directional Floodlight
	MODERNOBK	Black LED 6W 3100K 330 lm 35,000 hrs IP44 Lantern
	MODERNOWH	White LED 6W 3100K 330 lm 35,000 hrs IP44 Lantern
	MODPIRWH	White LED 6W 3100K 330 lm 35,000 hrs IP44 Lantern 120° PIR
	POLY10	Black LED 10W 4000K 800 lm 25,000 hrs IP44 Floodlight
	POLY20	Black LED 20W 4000K 2000 lm 25,000 hrs IP44 Floodlight

	POLY20PIR	Black LED 20W 4000K 2000 lm 25,000 hrs IP44 Floodlight 120° PIR
	POLY30	Black LED 30W 4000K 3000 lm 25,000 hrs IP44 Floodlight
	TAB10BK	Black LED 10W 4000K 750 lm 30,000 hrs IP65 Floodlight
	TAB10WH	White LED 10W 4000K 750 lm 30,000 hrs IP65 Floodlight
	TAB20BK	Black LED 20W 4000K 1500 lm 30,000 hrs IP65 Floodlight
	TAB20WH	White LED 20W 4000K 1500 lm 30,000 hrs IP65 Floodlight
	TAB30BK	Black LED 30W 4000K 2400 lm 30,000 hrs IP65 Floodlight
	TAB30PIRWH	White LED 30W 4000K 2400 lm 30,000 hrs IP65 Floodlight 120° PIR
	VECOF10PIR	Black LED 10W 4000K 850 lm 25,000 hrs IP44 Floodlight 120° PIR
	VECOF20PIR	Black LED 20W 4000K 1700 lm 25,000 hrs IP44 Floodlight 120° PIR
	VECOF50PIR	Black LED 50W 4000K 4250 lm 25,000 hrs IP44 Floodlight 120° PIR
	VECOFLD10	Black LED 10W 4000K 850 lm 25,000 hrs IP44 Floodlight
	VECOFLD50	Black LED 50W 4000K 4250 lm 25,000 hrs IP44 Floodlight
SPOTLIGHTS		
	SPOT2CR	Chrome Twin Bar 2x 50W Max GU10
	SPOT2SN	Nickel Twin Bar 2x 50W Max GU10
	SPOT2WH	White Twin Bar 2x 50W Max GU10
	SPOTLEDGAR	Nickel LED 4.3W 4000K 240 lm 30,000 hrs IP44 Garden Spotlight
	SPOTLEDWAL	Nickel LED 4.3W 4000K 240 lm 30,000 hrs IP44 Wall Spotlight
WEATHERPROOFS		
	VECO5WPSI2	Grey 5ft Single LED 30W 4000K 2900 lm 40,000 hrs IP65
	VECO5WPTW2	Grey 5ft Twin LED 45W 4000K 4300 lm 40,000 hrs IP65
	VECO6WPSI2	Grey 6ft Single LED 48W 4000K 4500 lm 40,000 hrs IP65
	VECO6WPSIN	Grey 6ft Single LED 48W 4000K 4500 lm 40,000 hrs IP65
	VECO6WPTW2	Grey 6ft Twin LED 65W 4000K 6200 lm 40,000 hrs IP65
		WPF158
WPF158EM3		Grey Single EM3 1 x 58W G13 T8 1500mm Fluorescent Tube Required
WPF170		Grey Single 1 x 70W G13 T8 1800mm Fluorescent Tube Required
WPF270		Grey Single 2 x 70W G13 T8 1800mm Fluorescent Tube Required
WPFCLIP		Stainless Steep Clip for WPF range
WP51SDEM3		Grey LED 5ft Single Step Dim EM3 30W 5000K 3000 lm 30,000 hrs IP65
WP61SDEM3		Grey LED 6ft Single Step Dim EM3 40W 5000K 4000 lm 30,000 hrs IP65
WPLED51SD	Grey LED 5ft Single Step Dim 30W 5000K 3000 lm 30,000 hrs IP65	
WPLED61SD	Grey LED 6ft Single Step Dim 40W 5000K 4000 lm 30,000 hrs IP65	
WPLEDEM361	Grey LED 6ft Single EM3 40W 5000K 4000 lm 30,000 hrs IP65	
All items available at clearance prices whilst stocks last		

W = Warranty M = Minimum Order Multiple O = Outer Pack Quantity

Picture	Code	Colour	Description	W	M/O
HORSTMANN - www.eterna-lighting.co.uk/product-category/horstmann/?ppp=-1					
	CSTAT1	WH	(CENTAURSTAT1) 24 hour single channel electronic programmable thermostat	7	1 / 1
	CSTAT17B	WH	Battery operated 7 Day programmable room thermostat	7	1 / 1
	ELEC/7Q	WH	Electronic economy 7 series immersion heater control (programmable boost)	7	1 / 1
	ECON/7Q	WH	Economy 7 Quartz electro mechanical timer (2 hour boost)	7	1 / 1
<div style="display: flex; justify-content: space-between;"> <div style="width: 45%;">  <p>ECON/7Q</p> <ul style="list-style-type: none"> • 0 – 120 minutes boost timer. • Designed for use with Economy 7 off peak rate overnight electricity, the Economy 7 Quartz is the standard by which all other water heating controls are judged and is the all time best seller in water heating controls. • A proven, reliable and accurate unit, the Economy 7 Quartz is easy to install and set, providing a tankful of hot water to start each day utilizing Economy 7 off peak rate overnight electricity. The manual boost timer provides extra hot water in the day time – should it be needed. </div> <div style="width: 45%;">  <p>H17-47XL RANGE</p> <ul style="list-style-type: none"> • 24 hour or 7 day • Back-lit LCD display • Preset clock • Automatic Winter/Summer time changes • Simplified menu driven programming <ul style="list-style-type: none"> • H17XL - Voltage free contacts makes the unit ideal for combi boilers • H27XL - Independent timing of heating and hot water • H37XL - Designed for use with fully pumped central heating systems using three separate zone valves. Meets zoning requirements of Part L1 of the Building Regulations • H47XL - Designed for use with fully pumped central heating systems using four separate zone valves in addition to many other applications </div> </div>					
	H17XL	WH	Single channel time switch with full 7 day programming	7	1 / 1
	H27XL	WH	Two channel with 7 day programming	7	1 / 1
	H37XL	WH	Programmer with 7 day setting over three independent channels	7	1 / 1
	H47XL	WH	Programmer with 7 day setting over four independent channels	7	1 / 1
	HRT4-A	WH	Electronic mains operated room thermostat	7	1 / 1
	HRT4B	WH	Wired battery operated room thermostat	7	1 / 1
	SIR020	WH	15/30/60-minute digital timer control up to 3kw (resistive)	7	1 / 1
	SIR021	WH	30/60/120-minute digital timer control up to 3kw (resistive)	7	1 / 1
	SIR022	WH	2/4/6-hour digital timer control up to 3kw (resistive)	7	1 / 1
O'NEILLS					
	ONPR2	WH	Dual channel heating controller	2	5 / 5
	ONPR3	WH	Three channel heating controller	2	5 / 5
NIGLON					
	GY2	GR / YW	2mm 100m Hank PVC Sleeving		

IRELAND TERMS & CONDITIONS

SCOPE

These terms and conditions apply to all offers made by O'Neills Electrical Ltd trading as Eterna Lighting Ireland (hereinafter called the Company) and to all contracts of sale made by the Company for its products. These terms and conditions shall not be modified unless with the prior written approval of a director of the Company. These terms and conditions shall prevail over any and all of the buyer's general and specific terms and conditions of purchase for the products and shall supersede all previous communications with the buyer either oral or written.

COMING INTO EFFECT

The contract between the Company and the buyer shall come into effect when the buyer's order is accepted by the Company.

STATUTORY RIGHTS

The provisions of these general conditions of sale shall not prejudice any rights which may, notwithstanding these conditions of sale, be guaranteed to the customer by virtue of sections 12, 13, 14 and 15 of the sale of goods act 1893, as amended by the sale of goods and supply of services act 1980, save to such extent as may be lawful from time to time in relation to any particular sale.

ORDERS

Orders will be made up to the nearest full pack quantity. Written confirmation of telephoned orders should be clearly marked as such, otherwise we cannot be held responsible should the order be duplicated. The right is reserved to refuse cancellation of any order placed or to suspend delivery of any order from time to time if any account is in arrears.

PRICES

Unless otherwise agreed in writing all orders are executed subject to prices and any relevant discounts ruling at the date of delivery and any other price list of the Company whether published or not shall apply. All prices are subject to Value Added Tax or any similar tax on duty of goods. Attention is drawn to the fact that listed prices and conditions are subject to alteration without prior notice.

QUOTATIONS

All quotations relating to price or discount and whether given verbally or in writing are valid for thirty days only. Quotations must in all cases, be authorised by a director of the Company.

MINIMUM ORDER VALUE

The Company reserves the right to levy a small order surcharge on all orders below €150/£150 nett trade. This charge will be in addition to any carriage charges.

DELIVERY

The Company will endeavour to execute orders as soon as possible but delivery dates either quoted or agreed are not of the essence of the contract, nor can the Company guarantee them. The Company are not responsible for any loss expense or damage sustained by the buyer of any sort caused by any delay in delivery. The buyer must accept delivery of the goods when offered by the Company at the site specified in the despatch invoice. Any additional costs or charges arising from delivery to any other site requested by the buyer shall be paid for by the buyer. Upon delivery of the goods to the site the buyer shall be deemed to be fully responsible for them and will immediately affect proper and adequate insurance. In the event of any loss or damage to the goods however arising before the buyer has paid the full price thereof the buyer shall compensate the Company for such loss and/or damage.

INSPECTION OF GOODS DELIVERED

The buyer is responsible for checking that goods of the correct specification and/or description are delivered and while the Company will replace any incorrect goods delivered provided they are notified thereof within a reasonable period the Company are not liable for loss or damage howsoever caused arising from the use of such goods even if their delivery arising from negligence of the Company, their servants or agents.

DAMAGE OR LOSS IN TRANSIT

In the event of damage or shortage, written or faxed notification must be sent to the Company within two working days as well as making a notation to that effect on the signed delivery note. In the event of non-delivery the Company must be notified in writing within seven days of the despatch date shown on the relevant invoice. In the event of failure to give notice within the aforementioned

periods the goods will be deemed to be in all respects as invoiced.

CARRIAGE

Unless otherwise specified the price excludes delivery charges from the Company's warehouse to the buyers premises. The Company reserves the right to choose the method of transport and may impose a carriage charge in exceptional circumstances. Requests for rail, courier or postal delivery will be at the buyers cost. When special items are ordered and the manufacturer charges carriage and/or packing, the Company reserves the right to pass these charges on at cost.

CREDITS – TIME LIMITATION

Under no circumstances will the Company consider claims for credit – of whatever nature- after the expiry of six months from the date of sale with the exception of products where specific periods of guarantee apply.

RETURNS

The Company will not accept for credit goods correctly supplied in accordance with order, without written approval. If consent is given, this will be subject to (a) a handling charge being imposed (b) returned goods must be sent carriage free (c) reference made to the original invoice on which the goods were supplied (d) a clear signature must be obtained from the Company confirming receipt of goods and (e) the Company will not replace goods claimed to be defective until it is confirmed the fault is not the result of improper use or installation.

SAMPLES

Any samples submitted with the Company's quotation or at the buyer's request must be returned within thirty days of receipt and may be charged if not so returned.

PAYMENTS

(a) Until such time as the Company has confirmed credit account facilities in writing, payment shall be due in full on or before delivery, and the Company may withhold delivery accordingly.

(b) A settlement discount of 2.5% is allowed for payment made by the last day of the month following delivery except on Value Added Tax or on such items marked on the Company's quotation, acceptance of order, or invoice as being 'Strictly Nett'

(c) The Company shall be entitled to charge interest on overdue accounts of 2.5% per month and to suspend deliveries without notice of any of the buyers orders or to cancel such orders if the buyer does on three or more occasions fail to pay due accounts without any reason of withholding payment or if the buyer being a Company has a receiver appointed or goes into liquidation or being an individual commits to an act of bankruptcy or has a receiving order made against him.

(d) Where the contract provides for separate instalments, deliveries or parts, payment for each instalment, delivery or part shall be made as if the same constituted a separate contract.

(e) No account shall exceed sixty days credit.

(f) Overdue accounts and those not qualifying for settlement discount are strictly nett.

(g) Receipts are not issued against payments by cheque unless specifically requested.

(h) The Company reserves the right to suspend supplies on a temporary or permanent basis and the discretion to determine any contract if the buyer is found to be in breach of its payment terms.

(i) The Company reserves the right at any time in its absolute discretion to revoke or vary any credit extended to the customer including the credit period referred to above.

TITLE

(a) The property in such goods supplied by the Company subject to these terms and conditions shall remain in the Company and shall not pass to the buyer until all monies inclusive of delivery and other charges due or owing to the Company by the buyer in consideration of such goods, have been paid and all other obligations due by the buyer have been performed notwithstanding that the goods have been delivered to the buyer.

(b) The buyer is entitled to sell the goods to third parties in the ordinary course of business on the condition that if the Company so requires the buyer so long as he has not fully discharged his debt to the Company shall deal separately as trustee for the Company with the proceeds of such sale and shall account to the Company for such monies as directed by it from time to time.

(c) It is a condition that goods supplied by the Company are sold to third parties on a first in first out basis and that

stocks of the Company's products held at any time by the buyer relate to the most recent invoices so that all stocks of the Company's products held are identified and are related to specific invoices.

(d) The buyer hereby empowers and authorises the Company to demand and receive payment from third parties for any of the Company's goods sold to such third parties whilst the buyer is in default of payment to the Company, which power will not be exercised by the Company without written notice to the buyer.

(e) Should the goods (or any of them) be converted into a new product, whether or not such conversion involves the admixture of any other goods or thing whatsoever and in whatever proportions, the conversion shall be deemed to have been effected on the Company's behalf and the Company shall have full legal and beneficial ownership of the new product.

(f) If any amount owing by the buyer to the Company is overdue, the Company may, without prejudice to any of its other rights or remedies, repossess and resell any or all such goods and may enter upon the buyer's premises for that purpose.

(g) The buyer shall not be entitled to pledge or create any lien or charge over the goods but, subject as aforesaid, may deal with the goods in the ordinary course of trade.

(h) The clauses herein relating to retention of title shall not be construed as to constitute an agency between the Company and the buyer in any circumstances.

(i) The clauses herein relating to retention of title do not entitle the buyer to return goods and refuse or delay payment on the grounds that the property in such goods has not passed to the buyer.

(j) If the reservation of ownership in the foregoing clauses is not effective for any reason whatsoever, the purchaser hereby undertakes to co-operate with the Company in establishing a similar security in favour of the Company.

WARRANTY AND EXCLUSION

The Company will use all reasonable endeavour to assign the benefit of any warranty it receives from its supplier to the Purchaser but shall not be liable for any claim or claims for any damages whether direct, indirect special or consequential or economic damage or loss (including loss of profit or goodwill) arising from any breach by its contract or any defect in the goods. In certain circumstances and for certain product ranges, the Company may offer a specific warranty against defects arising from faulty design or materials, for a defined period. Any warranty period offered will be deemed to have commenced on the date the goods have been delivered to the Purchaser. The Company will not be liable for any warranty or guarantee where the Purchaser has not paid for the goods in full by the due date. Nothing in these conditions shall exclude liability of the Company for death or personal injury resulting from its negligence insofar as the same is prohibited by Irish statute.

DESCRIPTIVE MATTER AND ILLUSTRATION

All descriptive and forwarding specifications, drawings and particulars of weights and dimensions issued by the Company are approximate only, and are intended only to present a general indication of appearance of the goods to which they refer and shall not form part of the contract. The Company reserve the right to alter or vary with or without notice.

COPYRIGHT

All drawings, descriptions and other information submitted by the Company shall remain the property of the Company together, with the copyright therein.

DESIGN IMPROVEMENT

As the Company constantly looks to improving and modernising products, the Company reserves the right to supply goods incorporating modifications in the design, when these are deemed by the Company to be an improvement.

FORCE MAJEURE

Every effort will be made to carry out the contract but its due performance is subject to cancellation by the Company or to such variation as it may find necessary as a result of inability to secure labour materials or supplies as a result of any act of god, war, strike, lockout or other labour dispute, fire, flood, drought, legislation or other (whether of the foregoing class or not) beyond its control.

LEGAL CONSTRUCTION

The terms of any contract to which these conditions of sale relate shall, in all respects be constructed and operate in accordance with the laws of the Republic of Ireland and be within the exclusive jurisdiction of the Irish courts.

INDEX

#	C				
1200P4K	37	CB15A	84	CSLEDCR	26
20TRSBK	84	CB5A	84	CSLEDCREM3	26
20TRSG	84	CFLEDMINSC	25	CSLEDWH	26
20TRSWH	84	CFLEDWHSC	26	CSLEDWHEM3	26
220-L	83	CFLWHEM3SC	26	CSTAT1	88
222-L	83	CHA18EM3	24	CSTAT17B	88
223-L	83	CHA18MW	24	CW3021	33
224-L	83	CHA18MW3	24		
225-L	83	CHA18SD	24	D	
25TRSG	84	CHA18SDEM3	24	DC1WH	81
397/5	83	CHA18STD	24	DD16435	85
600P4K	37	CHA18STD	24	DD28435	85
600P4KTPU	37	CHAEYEBK	24	DECKLED	67
600P5K	37	CHAEYEGY	24	DFH2KW	74
		CHAEYEWB	24	DFHT2KW	74
		CHAFULLBK	24		
		CHAFULLCR	24	E	
		CIRCBK	27	EB1	20
		CIRCCR	27	EB10/2	20
		CIRCWH	27	EB11	20
		CIROPALEM3	23	EB12	20
		CIROPALMW	23	EB13	20
		CIROPALMW3	23	EB14	20
		CIROPALSTD	23	EB15	20
		CIRPRISEM3	23	EB16	20
		CIRPRISMW	23	EB17	20
		CIRPRISMW3	23	EB18	20
		CIRPRISSTD	23	EB19	20
		CLEDCIR	64	EB2	20
		CLEDCIRWH	64	EB20	20
		CLEDTRI	64	EB21	20
		CO12	27	EB3	20
		CO12EM3	27	EB4	20
		CO12MW	27	EB5	20
		CO12MW3	27	EB6	20
		CO12PC	27	EB7	20
		CO12SCPC	27	EB8	20
		CO18	27	EB9	20
		CO18EM3	27	EBLGD	8
		CO18MW	27	EBLGDR	8
		CO18MW3	27	EBLGDU	8
		CO18PC	27	EBLSLIMM	9
		COMDL15	55	EBPM3	9
		COMDL25	55	EBPM3LI	9
		COMDL40	55	ECON/7Q	88
		COMRCS15	54	ELEC/7Q	88
		COMRCS25	54	ELEGAN5EM3	42
		COMRCS35	54	ELEGANCE5	42
		CONVERT2	82	ELESUSPACK	42
		CONVERT4	82	EML3MISO	6
		CONVHTFAN	75	EML3NMISO	6
		CONVHTSTD	75	EMLED3M	6
		CONVHTTIM	75	EMLED3NM	6
		CPRIS	27	EMMOD	12
		CR10	85	EMMOLR	12
		CR10PW	85	EMMOUP	12
		CR80CR	57	EMPCR	79
		CR80SN	57	EX360PIRWH	77
		CR80WH	57	EXIT3MLED	8
				EXITMMO	12
				EXITREC	12
				EYEBK	27
				EYEWB	27
				F	
				FLD10BK	47
				FLD10PIRBK	47
				FLD10PIRWH	47
				FLD10WH	47
				FLD20BK	47
				FLD20PIRBK	47
				FLD20PIRWH	47
				FLD20WH	47
				FLD30BK	47
				FLD30PIRBK	47
				FLD30PIRWH	47
				FLD30WH	47
				FLD50BK	47
				FLD50PIRWH	47
				FLD50WH	47
				FLOOD120W	49
				FLOOD200W	49
				FLOOD50W	49
				FLOOD80W	49
				G	
				GDL50SS	67
				GRILLBK	27
				GRILLWH	27
				GU10LH	85
				GY2	88
				H	
				H17XL	88
				H27XL	88
				H37XL	88
				H47XL	88
				HBAYLEDCIR	52
				HBAYLIN	51
				HBCIR150	52
				HBCIR150PP	52
				HBCIRDIF90	52
				HBDIFALU90	52
				HDA-1800	73
				HL60B	71
				HL60WH	71
				HRT4-A	88
				HRT4B	88
				I	
				IFIRELCS	56
				IFIRELCSN	56
				IFIRELCSWH	56
				IPCONNECT	84
				ISOEBLGDD	8
				ISOEBLGDL	8
				ISOEBLGDR	8
				ISOEBLGDU	8
				ISOLGDSET	6
				ISOMDDD	13
				ISOMDDL	13
				ISOMMOD	12
				ISOMMOLR	12
				ISOSIGND	13
				ISOSIGNLR	13
				J	
				JSL242	83
				JSL242BP	83
				JSL244	83
				JSL244BP	83
				K	
				KBAT4	41
				KBAT5	41
				KBAT6	41
				KCAS14BKFL	28
				KCAS14BKLV	28
				KCAS14WHFL	28
				KCAS14WHLV	28
				KCAS8BKFL	28
				KCAS8WHFL	28
				KCIREM3	25
				KCIREYEBK	25
				KCIREYEGY	25
				KCIREYEWB	25
				KCIRFULLBK	25
				KCIRFULLCR	25
				KCIRMW	25
				KCIRMW3	25
				KCIRSTD	25
				KCOMCS13	54
				KCOMCS18	54
				KCOMCS8	54
				KEM3BULKLI	7
				KEM3LIDL	11
				KEM3ML	7
				KEXIT3MLI	8
				KFIRE4CR	56
				KFIRE4SN	56
				KFIRE4WH	56
				KFLATDL12	55
				KFLATDL18	55
				KFLATDL24	55
				KFLD10	48
				KFLD20	48
				KFLD30	48
				KFLD50	48
				KFLDPIR	48
				KNANOIP2FT	42
				KNANOIP4FT	42
				KNANOIP5FT	42
				KPANBL	38
				KRECBOP	31
				KRECBOPPC	31
				KTWINSPLI	10
				KWPEM3SIN5	45

INDEX

■ KWPEM3SIN6	45	■ ONPR3	88	■ SFLWW15	63	T	■ VECOMEM3	7	
■ KWPEM3TWI5	45	■ OPCIREM3	22	■ SFLWW9	63	■ T8LED16	42	■ VECOMEM3L	7
■ KWPEM3TWI6	45	■ OPCIRMW	22	■ SH1844DVO	59	■ T8LED20	42	■ VECOPANBL	38
■ KWPSIN5	45	■ OPCIRMW3	22	■ SH3WH	74	■ T8LED24	42	■ VECORCFL10	48
■ KWPSIN6	45	■ OPCIRSTD	22	■ SHEYEBK	28	■ TCWH	81	■ VECORCFL20	48
■ KWPTWI5	45	■ OPSQEM3	22	■ SHEYEMWBK	28	■ TH1	73	■ VECORDL12	54
■ KWPTWI6	45	■ OPSQMW	22	■ SHEYEWB	28	■ TH2	73	■ VECORDL24	54
		■ OPSQMW3	22	■ SHFULLBK	28	■ TH3	73	■ VECORDL6	54
		■ OPSQSTD	22	■ SHFULLMWBK	28	■ TH4	73	■ VECOTWINSP	10
				■ SHFULLMWWH	28	■ TLS1440	78	■ VECOWLG	66
L		P		■ SHFULLWH	28	■ TLS68EX	78	■ VECOWLPIRG	66
■ L60B	71	■ PACIFIC12	29	■ SIGNLEDEM3	13	■ TRG1FT	73	■ VECOWLPIRW	66
■ LBB120	51	■ PANSUSKIT	37	■ SIGNLGD	13	■ TRG2FT	73	■ VECOWLW	66
■ LBB3050	51	■ PFH2400	74	■ SIGNLGDUP	13	■ TRG3FT	73	■ VECOWP5FT	44
■ LBB80	51	■ PIR110BK	77	■ SIR020	88	■ TRG4FT	73		
■ LDLEM3	11	■ PIR180BK	77	■ SIR021	88	■ TRIMLONG	67	W	
■ LDLEM3LI	11	■ PIR180WH	77	■ SIR022	88	■ TSPOTLIP20	10	■ WELLBKPIR	66
■ LEDLBAY120	51	■ PIR80BK	30	■ SIR022	88	■ TUS10NL	63	■ WELLBKSTD	66
■ LEDLBAY30	51	■ PIRFM360	77	■ SLGUCR	61	■ TUS16NL	63	■ WELLDIFF	66
■ LEDLBAY50	51	■ PIRHL60BK	71	■ SLGUSN	61	■ TUS20NL	63	■ WELLWHPIR	66
■ LEDLBAY80	51	■ PIRHL60WH	71	■ SLGUWH	61	■ TUS6NL	63	■ WELLWHSTD	66
■ LEDMDDDEM3	13	■ PIRL60BK	71	■ SLICELONG	67	■ TWSBE	83	■ WGLEDBK	66
■ LEDMIRROR	60	■ PRCIREM3	22	■ SPOT1CR	69	■ TWSRCDMC	82	■ WGLEDDWH	66
■ LEDOM5CR	60	■ PRCIRMW	22	■ SPOT1SN	69	■ TWSRCDWH	82	■ WLPPSING	68
■ LEDOM5WH	60	■ PRCIRMW3	22	■ SPOT1WH	69			■ WLPPTWIN	68
■ LEDSH44	59	■ PRCIRSTD	22	■ SPOT2CR	69	V		■ WP41	44
■ LEDSH6CR	59	■ PRSQEM3	22	■ SPOT2SN	69	■ VECO5WPSI2	45	■ WP41EM3	44
■ LEDSH6WH	59	■ PRSQMW	22	■ SPOT2WH	69	■ VECO5WPTW2	45	■ WP41MW	44
■ LEDSHDVO	59	■ PRSQMW3	22	■ SPOT3CRBAR	69	■ VECO6WPSI2	45	■ WP41MW3	44
■ LEDTWNSPOT	10	■ PRSQSTD	22	■ SPOT3CRPL	69	■ VECO6WPTW2	45	■ WP42	44
■ LGDSET	7	■ PTBLOCK	84	■ SPOT3SNBAR	69	■ VECOBAT4FT	41	■ WP42EM3	44
■ LMDDEM3ISO	13	■ PUSHLED	78	■ SPOT3SNPL	69	■ VECOBAT5FT	41	■ WP42MW	44
				■ SPOT3WHBAR	69	■ VECOBAT5HO	41	■ WP42MW3	44
M		R		■ SPOT3WHPL	69	■ VECOBAT6FT	41	■ WP51	44
■ MINIEYEBK	28	■ RDT10A	79	■ SPOT4CR	69	■ VECOBAT6HO	41	■ WP51EM3	44
■ MINIFULLWH	28	■ RLGDLR	13	■ SPOT4SN	69	■ VECOCABPCI	64	■ WP51MW	44
■ ML5040	60	■ RLGDUPL	13	■ SPOT4WH	69	■ VECOCABPTR	64	■ WP51MW3	44
■ MSCSLCREM3	26			■ SPOTLEDGAR	68	■ VECOEMISOL	7	■ WP52	44
■ MSCSLEDCR	26	S		■ SPOTLEDWAL	68	■ VECOEXIT3M	8	■ WP52EM3	44
■ MSCSLEDWH	26	■ SA360PIR	77	■ SQOPALEM3	23	■ VECOF10PIR	47	■ WP52MW	44
■ MSCSLWHEM3	26	■ SDCSLCREM3	26	■ SQOPALMW	23	■ VECOF20PIR	47	■ WP52MW3	44
■ MSLEDMINSC	25	■ SDCSLEDCR	26	■ SQOPALMW3	23	■ VECOF50PIR	47	■ WP61	44
■ MSLEDWHSC	26	■ SDCSLWHEM3	26	■ SQOPALSTD	23	■ VECOFBK	71	■ WP61EM3	44
■ MSLWHEM3SC	26	■ SEEBPM3	9	■ SQPRISEM3	23	■ VECOFD10	47	■ WP61MW	44
■ MWCASE	79	■ SEEXIT3ML	8	■ SQPRISMW	23	■ VECOFD50	47	■ WP61MW3	44
		■ SELB4FTEM3	41	■ SQPRISMW3	23	■ VECOFPIRBK	71	■ WP62	44
N		■ SELB5FTEM3	41	■ SQPRISSTD	23	■ VECOHBK	71	■ WP62EM3	44
■ N64/1	63	■ SELB5HOEM3	41	■ SSBE	83	■ VECOHPIRBK	71	■ WP62MW	44
■ N64/3	63	■ SELB6FTEM3	41	■ SSHDA-2500	73	■ VECOIBRACK	56	■ WP62MW3	44
■ N64/5	63	■ SELB6HOEM3	41	■ SSRCDWH	82	■ VECOIFIRE3	56	■ WPACKLED	30
■ N64/7	63	■ SELDLEM3	11	■ SSWLDIR	68	■ VECOIFIRE4	56	■ WPACKLEDPC	30
■ NL1WH	63	■ SEMEM3	6	■ SSWLSING	68	■ VECOISOD	8	■ WPCSBK	30
■ NPCHKIT	79	■ SENSORMW	79	■ SSWLTWIN	68	■ VECOISOL	8	■ WPCSBKPC	30
		■ SESIGNLEM3	13	■ SURFACEMK	37	■ VECOISOR	8	■ WPCSWH	30
O		■ SESMDCL	12	■ SUSPACK	37	■ VECOLT510	64	■ WPCSWHPC	30
■ OILHT157	75	■ SESMDLEM3	12			■ VECOLT514	64		
■ OILHT211	75	■ SFLDR36	63			■ VECOLT54	64	X	
■ OILHT211T	75					■ VECOLT58	64	■ XS63W	78
■ OMLED10	60								
■ ONPR2	88								

Everyday Lighting For Professionals



T: +353 1 844 6300
E: sales@eterna-lighting.ie
E: technical@eterna-lighting.ie
W: www.eterna-lighting.ie

O'Neills Electrical Ltd trading as Eterna Lighting Ireland
Co. Reg. No. IE 018423 | WEEE Reg. No. 00093WB | VAT Reg. No. IE 8R73602D
Unit B4D | Airport Business Park | Cloghran | Co. Dublin | K67 X7H9

