



5
Year Warranty

IP66

IK08

Double Insulated




MINI LED AMENITY FITTINGS

Long life, energy efficient utility fitting perfect for domestic or commercial settings including pathway illumination, gardens and porches, staircases and many more

- Polycarbonate construction
- Instant start to full illumination level
- Stainless steel screws
- Multiple low power LED array & optically optimised diffuser: ensures a soft, even lighting effect with no degradation of light output
- 4200K colour temperature: for bright neutral white appearance
- IP66 ceiling or wall mounted: giving versatile fixing options suitable for bathroom, internal and external use

Code	Colour	Diffuser	Wattage	Colour Temp.	Lumens	Avg. Rated Life (Hrs)	IP / IK Rating	MOM / OPQ
MINIFULLWH	White	Full	6W	4200K	530 lm	50,000 hrs	IP66 IK08	1 / 10
MINIEYBK	Black	Eyelid			445 lm			

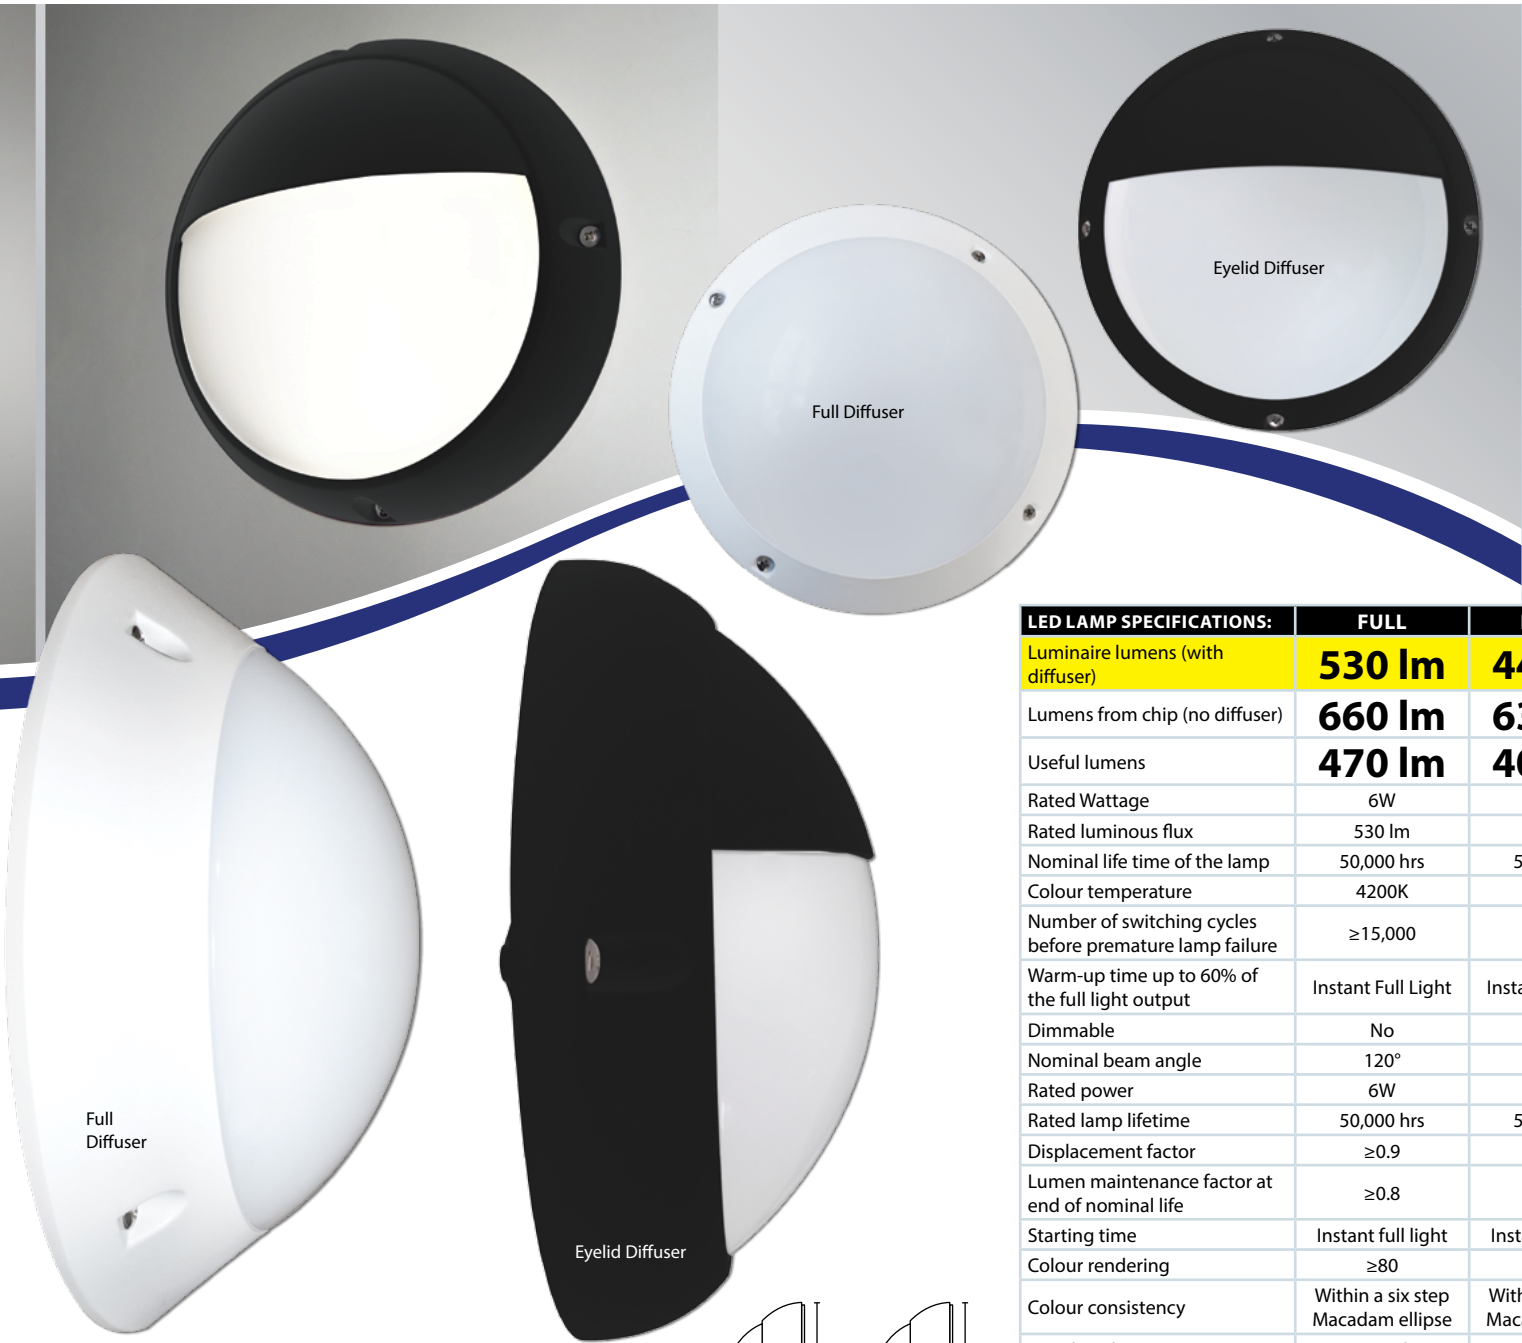

LED LAMP SPECIFICATIONS:	FULL	EYELID
Luminaire lumens (with diffuser)	530 lm	445 lm
Lumens from chip (no diffuser)	660 lm	635 lm
Useful lumens	470 lm	400 lm
Rated Wattage	6W	6W
Rated luminous flux	530 lm	445 lm
Nominal life time of the lamp	50,000 hrs	50,000 hrs
Colour temperature	4200K	4200K
Number of switching cycles before premature lamp failure	≥15,000	≥15,000
Warm-up time up to 60% of the full light output	Instant Full Light	Instant Full Light
Dimmable	No	No
Nominal beam angle	120°	120°
Rated power	6W	6W
Rated lamp lifetime	50,000 hrs	50,000 hrs
Displacement factor	≥0.9	≥0.9
Lumen maintenance factor at end of nominal life	≥0.8	≥0.8
Starting time	Instant full light	Instant full light
Colour rendering	≥80	≥80
Colour consistency	Within a six step Macadam ellipse	Within a six step Macadam ellipse
Rated peak intensity	153cd	103cd
Rated beam angle	120°	120°
Voltage / Frequency	240V~50Hz	240V~50Hz
Lumen efficacy	88 lm / W	74 lm / W
This product contains a Light Source of Energy Efficiency Class E		
Not suitable for accent lighting		

