


10W
Shown

This luminaire contains built-in LED lamps.



The lamps cannot be changed in the luminaire.

874/2012



RECHARGEABLE LED FLOODLIGHTS

4 HOURS
ILLUMINATION
(ON 100% SETTING)

6 HOURS
ILLUMINATION
(ON 60% SETTING)

Mains and
car charger
included

- Plastic body, steel stand
- 10W: 2 x 2,200 mah capacity battery
- 20W: 4 x 2,200 mah connected in parallel = 4,400 mah capacity
- 4 hours illumination on 100% setting / 6 hours illumination on 60% setting (with full charge)
- Charge times from full discharge are as follows:
10W: 4 hours (mains charger) / 6 hours (car charger)
20W: 5 hours (mains charger) / 6 hours (car charger)
- 2 lighting levels available: full power and 60% energy saving option
- Insulated handle grip • Safety glass cover
- IP65: enables internal and external use
- Floodlight tilts up and down on the stand and can be rotated 360° horizontally
- Comes complete with mains charger and car charger
- Eterna 2 year warranty

- 10W: M.O.M: 1 / O.P.Q: 20
- 20W: M.O.M: 1 / O.P.Q: 10

LED INDICATOR ON
MAINS CHARGER

CHARGING:


Indicator LED turns to orange

FULLY CHARGED:

Indicator LED turns to green

LAMP SPECIFICATIONS:	10W	20W
Luminaire lumens (with glass diffuser)	600 lm	1450 lm
Lumens from chip (no diffuser)	800 lm	1600 lm
Useful lumens	570 lm	1350 lm
Rated Wattage	10W	20W
Rated luminous flux	570 lm	1350 lm
Nominal life time of the lamp	30,000 hrs	30,000 hrs
Colour temperature	6000K	6000K
Number of switching cycles before premature lamp failure	>15,000	>15,000
Warm-up time up to 60 % of the full light output	0.2s	Instant full light
Dimmable	No	No
LED dimensions	11mm²	24mm²
Nominal beam angle	120°	120°
Rated power	10W	20W
Rated lamp lifetime	30,000 hrs	30,000 hrs
Lumen maintenance factor at end of nominal life	50%	50%
Starting time	0.2s	<0.2s
Colour rendering	≥65	≥65
Colour consistency	Within a six step Macadam ellipse	Within a six step Macadam ellipse
Rated peak intensity	210cd	210cd
Rated beam angle	120°	120°
Charger Output Voltage	8.4V 1A	8.4V 1A

Not suitable for accent lighting

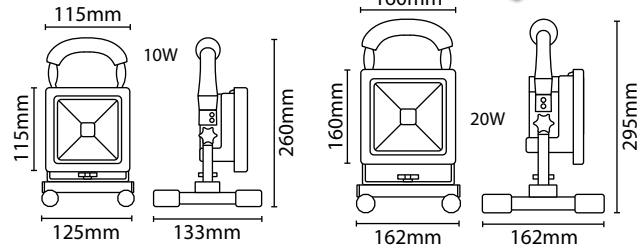

Code	Colour	Wattage	Charging Options	Colour Temp.	Luminaire Lumens	Avg. Rated Life (Hrs)	IP Rating	Energy Rating
RCFLOOD10	Yellow	10W	240/12V	6000K	600 lm	30,000 hrs	IP65	A+
RCFLOOD20		20W			1450 lm			A