



5 Year Warranty




Double Insulated

Mains cable, link lead and fixing clips supplied




Eterna
Everyday Lighting For Professionals

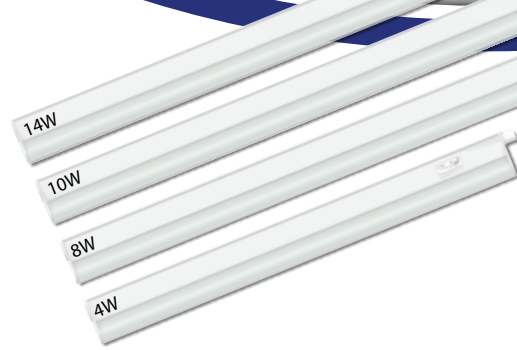

LED LAMP SPECIFICATIONS:	4W	8W	10W	14W
Luminaire lumens (with diffuser)	350 lm	710 lm	880 lm	1240 lm
Lumens from chip (no diffuser)	390 lm	780 lm	970 lm	1360 lm
Useful lumens	320 lm	640 lm	800 lm	1120 lm
Rated Wattage	4W	8W	10W	14W
Rated luminous flux	320 lm	640 lm	800 lm	1120 lm
Nominal life time of the lamp	30,000 hrs	30,000 hrs	30,000 hrs	30,000 hrs
Colour temperature	4000K	4000K	4000K	4000K
Number of switching cycles before premature lamp failure	15,000	15,000	15,000	15,000
Warm-up time up to 60% of the full light output	Instant full light	Instant full light	Instant full light	Instant full light
Dimmable	No	No	No	No
Nominal beam angle	120°	120°	120°	120°
Rated power	4W	8W	10W	14W
Rated lamp lifetime	30,000 hrs	30,000 hrs	30,000 hrs	30,000 hrs
Displacement factor	0.84	0.84	0.84	0.88
Lumen maintenance factor at end of nominal life	>0.7	>0.7	>0.7	>0.7
Starting time	<0.1s	<0.1s	<0.1s	<0.1s
Colour rendering	>80	>80	>80	>80
Colour consistency	Within a six step Macadam ellipse	Within a six step Macadam ellipse	Within a six step Macadam ellipse	Within a six step Macadam ellipse
Rated peak intensity	96cd	180cd	220cd	317cd
Rated beam angle	120°	120°	120°	120°
Voltage / Frequency	240V~50Hz	240V~50Hz	240V~50Hz	240V~50Hz

Not suitable for accent lighting

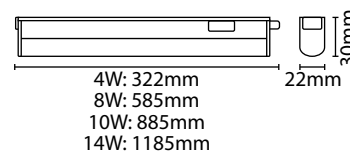

ECONOMY T5 LED LINKABLE FITTING

- Polycarbonate construction • Rocker switch
- Superb light output and lighting effect: low power consumption with enhanced life expectancy
- 1.8m mains lead with 22cm link lead: linkable with up to 5 other fittings
- Optically optimised diffuser: ensures a soft diffused light with no degradation of light output

Code	Wattage	Colour Temp.	Lumens	Avg. Rated Life (Hrs)	IP Rating	MOM / OPQ
VECOLT54	4W	4000K	350 lm	30,000 hrs	IP20	1 / 30
VECOLT58	8W		710 lm			
VECOLT510	10W		880 lm			
VECOLT514	14W		1240 lm			