



**5**  
Year Warranty



Li-Ion Battery



Mains & car charger included



VECORCFL10  
Excellent for  
use in fuse box  
cupboards



VECORCFL20  
Perfect for  
use in attics

**Eterna**<sup>®</sup>  
Everyday Lighting For Professionals

**ECONOMY RECHARGEABLE FLOODLIGHT**



- ABS housing • Safety glass cover
- 10W: 2 x 18650 Li-ion battery - 3.7V, capacity 2200mAh
- 20W: 4 x 18650 Li-ion battery - 7.4V, capacity 4400mAh
- 4 hours illumination (with full charge)
- Charge times from full discharge are as follows:  
6 hours (mains charger) / 6 hours (car charger)
- IP44: enables internal and external use
- Comes complete with mains charger and car charger




VECORCFL10



VECORCFL20



LED LAMP SPECIFICATIONS:	10W	20W
Luminaire lumens (with diffuser)	<b>650 lm</b>	<b>1300 lm</b>
Lumens from chip (no diffuser)	<b>900 lm</b>	<b>1400 lm</b>
Useful lumens	<b>600 lm</b>	<b>1300 lm</b>
Rated Wattage	10W	20W
Rated luminous flux	600 lm	1300 lm
Nominal life time of the lamp	30,000 hrs	30,000 hrs
Colour temperature	4000K	4000K
Number of switching cycles before premature lamp failure	15,000	15,000
Warm-up time up to 60% of the full light output	<1s	<1s
Dimmable	No	No
Nominal beam angle	120°	120°
Rated power	10W	20W
Rated lamp lifetime	30,000 hrs	30,000 hrs
Lamp power factor	>0.5	>0.5
Lumen maintenance factor at end of nominal life	≥0.7	≥0.7
Starting time	<0.5s	<0.5s
Colour rendering	70	70
Colour consistency	Within a six step Macadam ellipse	Within a six step Macadam ellipse
Rated peak intensity	207cd	413cd
Rated beam angle	120°	120°
Voltage / Frequency	3.7V DC	7.4V DC

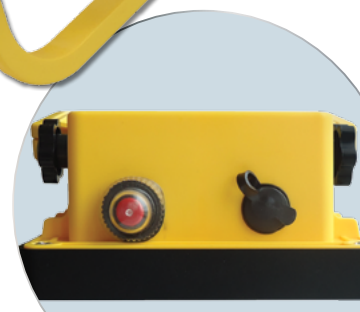

Code	Wattage	Colour Temp.	Lumens	Avg. Rated Life (Hrs)	IP Rating	MOM / OPQ
VECORCFL10	10W	4000K	650 lm	30,000 hrs	IP44	1 / 10
VECORCFL20	20W	4000K	1300 lm	30,000 hrs	IP44	1 / 5

Not suitable for accent lighting