


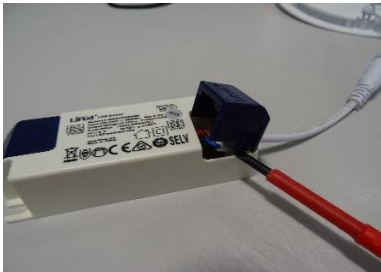





Disassembly	Products	LED Recessed Downlights	1 of 1
	VECORDL6 VECORDL12 VECORDL18 VECORDL24		


				
1 Fitting must be removed from mains power	2 Control Gear - LED Driver	3 Remove both connection covers - lever with screwdriver	4 Remove Mains cable by pressing terminal release tabs	5 Remove LED output cable by pressing terminal release tabs

				
6 New LED Driver with terminal covers removed	7 Twist plug/socket anticlockwise to release LED Driver	8 Remove Springs x2	9 Remove fixing screws to take off Rear Cover	10 Lift out and remove Reflector assembly

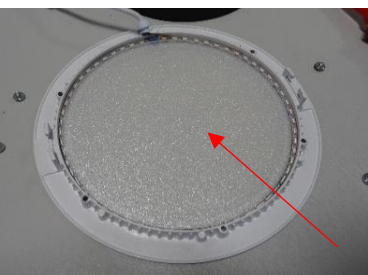


11

Lift out and remove Light Guide Plate and Diffuser

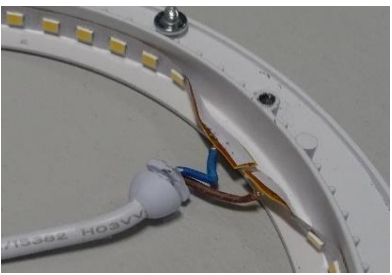

12

LED Tape can then be removed from Body Casting



13

Unsolder Connector Lead from LED Tape

Component	Material
Driver	Various
Plug Lead Assy	Various
Spring	Stainless Steel
Rear Cover	Steel
Body	Aluminium Casting
Reflector	Polycarbonate
Light Guide	Polycarbonate
Diffuser	Polycarbonate