

See Page 2
For Installation
Quick Guide

-  LED
-  5 Year Warranty
-  IP65
-  120° PIR
-  Double Insulated

Eterna[®]
Everyday Lighting For Professionals


POLYCARBONATE LED WELL GLASS

Flexible and decorative range of fittings ideally suited for outdoor applications requiring corner lights

- Complete solution for flat wall or corner mounting: bracket included for optional corner mounting

PIR VERSION:

- Factory preset 120° PIR
- 10 lux - 7 minutes duration
- No override facility

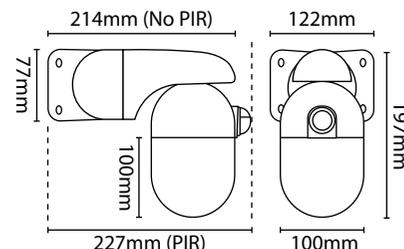

LED LAMP SPECIFICATIONS:

| | |
|--|-----------------------------------|
| Luminaire lumens (with diffuser) | 660 lm |
| Lumens from chip (no diffuser) | 900 lm |
| Useful lumens | 660 lm |
| Rated Wattage | 10W |
| Rated luminous flux | 660 lm |
| Nominal life time of the lamp | 25,000 hrs |
| Colour temperature | 4000K |
| Number of switching cycles before premature lamp failure | 12,500 |
| Warm-up time up to 60% of the full light output | Instant Full Light |
| Dimmable | No |
| Nominal beam angle | 120° |
| Rated power | 10W |
| Rated lamp lifetime | 25,000 hrs |
| Lamp power factor | >0.5 |
| Lumen maintenance factor at end of nominal life | 70 |
| Starting time | 0.5s |
| Colour rendering | ≥80 |
| Colour consistency | Within a six step Macadam ellipse |
| Rated peak intensity | 214cd |
| Rated beam angle | 120° |
| Voltage / Frequency | 240V~50Hz |
| Not suitable for accent lighting | |

| Code | Colour | Version | Wattage | Colour Temp. | Lumens | Avg. Rated Life (Hrs) | IP Rating | MOM / OPQ |
|-----------|--------|----------|---------|--------------|--------|-----------------------|-----------|-----------|
| WELLWHSTD | White | Standard | 10W | 4000K | 660 lm | 25,000 hrs | IP65 | 1 / 6 |
| WELLBKSTD | Black | | | | | | | |
| WELLWHPIR | White | 120° PIR | 10W | 4000K | 660 lm | 25,000 hrs | IP65 | 1 / 6 |
| WELLBKPIR | Black | | | | | | | |

LED Polycarbonate Well Glass Quick Fit Guide

