



eterna.

**Commercial,
Utility &
Industrial.**

PlugPack Compatible

Simplifying stock management and flexibility onsite.

PlugPack is a game-changer for wholesalers and installers. Reduce the range of variations needed in stock and easily upgrade Eterna lights yourself with emergency, step dim and microwave functionality – simply by clicking into the base unit or LED tray.

Wherever the PlugPack logo is located, this indicates the compatibility with the same three accessories: promising lower demands for stock variability and easier installation for installers on the move.

Simple. Smart. PlugPack.



3W Standard and Self-Test Switchable Emergency Module with both functions selectable via a switch.



On/Off microwave sensor, featuring dip-switch adjustment for detection area, hold time and daylight threshold.



Step dim microwave sensor, combining two functions in a single module.



Orba.

A versatile IP65 bulkhead designed to meet your lighting needs with 3 adjustable outputs and 5 colour temperature options. Multiple conduit entries and a BESA fixing point; a flexible fitting for a number of applications.

Page 19



Lina.

An IP66 amenity bulkhead that offers flexibility with adjustable wattages and colour temperatures. The Lina suits both residential or commercial settings including perimeter lighting, paths, gardens, and staircases.

Page 20



Kora.

A perfect balance of visual comfort and light efficiency. This range is fully adjustable with power outputs and colour temperature options, and available with a Photocell option for convenience in outdoor applications.

Page 21



Reba.

An IP65/IK10 power and CCT switchable utility bulkhead comes in circular, square, white and black to suit the varying project requirements, with either prismatic or opal diffusers.

Page 22



Commercial, Utility & Industrial

Emergency Lighting.

Emergency Bulkhead.

High power maintained emergency bulkhead incorporating 3 rows of LEDs for higher output and a more even distribution across the fixture.

- Hinged gear tray & push fit terminal block
- 20mm gland entries as standard
- Viewing distance 20m
- High output LEDs 350 lumens in mains mode and 200 lumens in emergency mode
- LiFePO4 5 year warranty
- EMELED3M ICEL Certified 001-066



Code	Version	Wattage	Lumens	Size (mm)
EMLED3M	Maintained Emergency, Signs Directive Set, 6000K	4	350	355 x 110 x 70
EMLED3NM	Non-Maintained Emergency, Signs Directive Set, 6000K	2	150	355 x 110 x 70
Accessories				
LGDSET	Signs Directive Legend Sticker Set			
ISOLGDSET	ISO 7010 Adhesive Sticker Legend Set			
BULKFRAME	Recessed Bulkframe for the EMELED3 Range			



Maintained Emergency Bulkhead.

IP65 | 6000K | 5 Year Warranty | 120° | LiFePO4
5 Year Warranty



Code	Version	Wattage	Lumens	Size (mm)
KEM3BULKLI	Maintained Emergency, ISO Legend Set, 6000K	3	240	355 x 110 x 70
Accessories				
BFRAME	Semi-Recessed Bulkframe			
LGDSET	Signs Directive Legend Sticker Set			
KEM3DS	Drop Down Accessory with Legend			

Self-Test Maintained Emergency Bulkhead.

IP65 | 6400K | 5 Year Warranty | 120° | LiFePO4
5 Year Warranty



Code	Version	Wattage	Lumens	Size (mm)
SEMEM3	Maintained Self-Test Emergency, ISO Legend set, 6400K	4	270	355 x 110 x 70
Accessories				
BFRAME	Semi-Recessed Bulkframe			
LGDSET	Signs Directive Legend Sticker Set			
KEM3DS	Drop Down Accessory with Legend			



Vorto.

The Vorto IP65 emergency twin spot with 2 adjustable heads giving a combined 500 lumen output for emergency situations. The Vorto is designed for simple and quick installation with a clip on front cover and the use of push fit terminals perfect for commercial, industrial and warehouse applications.

- Polycarbonate IP65 IK08 construction
- Twin 2.5W LED adjustable and tiltable heads
- Quick fit cover and push fit terminals
- 20mm side entry points
- 3 hour non-maintained manual test function
- LiFePO4 5 year warranty
- ICEL Certified (001-069)



Code	Version	Wattage	Lumens	Size (mm)
E01VT65EM	Non-maintained Emergency, 6000K	5	500	297 x 282 x 70




Internal Emergency Twinspot.

IP20 | IK08 | 6400K | 5 Year Warranty | 120° | LiFePO4
5 Year Warranty



Code	Version	Wattage	Lumens	Size (mm)
KTWINSPLI	Non-maintained Emergency, 6400K	4	450	285 x 250 x 50



Internal Self-Test Emergency
Twinspot.

IP20 | IK08 | 6000K | 5 Year Warranty | 120° | LiFePO4
5 Year Warranty



Code	Version	Wattage	Lumens	Size (mm)
SETSPOT	Self-Test Emergency, 6000K	4.5	437	284 x 250 x 51



LDLEM3 Emergency Downlight.

This LED compact recessed emergency light is ideal for use in corridors, stairwells and commercial spaces that require a discreet emergency solution.

- Aluminium construction
- Matt silver and white trims included
- 32mm diameter hole cut out size
- LiFePO4 5 Year Warranty
- ICEL Certified 001-068



IP20

5 Year

120°

Code	Version	Wattage	Lumens	Ø x H (mm)
LDLEM3	Emergency, 6000K	1.4	120	32 x 230
SELDLEM3	Emergency, Self-Test	1.4	118	45 x 230




Emergency 2W Downlight.

IP20 | 5 Year Warranty | 120° | Black, Silver, White Bezels included | LiFePO4 5 Year Warranty



Code	Version	Cut Out (mm)	Wattage	Lumens	Ø x H (mm)
LDLEM3LI	Emergency	50	2	160	60 x 210



Self-Test Surface Mount Emergency Downlight.

IP20 | 6000K | 5 Year Warranty | 120° | LiFePO4 5 Year Warranty



Code	Version	Wattage	Lumens	Ø x H (mm)
SESMDLEM3	Self-Test Emergency	3	175	150 x 45

Accessories

SESMDCL	Corridor Lens For SESMDLEM3
---------	-----------------------------



Slimline Emergency Exit Box.

A slim emergency exit box with a hinged front for simple installation with a viewing distance of 29m. Perfect for hospitality, retail and commercial applications.

- Wall mounted hinged polycarbonate design
- LED array on base for downward illumination
- ISO 7010 down, up, left and right legends
- LiFePO4 5 Year Warranty



Code	Version	Wattage	Lumens	Size (mm)
E0ISB1	Black, 6000K	2	27	325 x 187 x 30
E0ISW1	White, 6000K	2	27	325 x 187 x 30

Accessories


E0ISD	Signs Directive Down Arrow Legend
E0ISUP	Signs Directive Up Arrow Legend
E0ISR	Signs Directive Right Arrow Legend
E0ISL	Signs Directive Left Arrow Legend



Emergency Exit Box.

- 3 hour maintained or non-maintained operation
- Viewing distance: 32m
- Interchangeable Signs Directive down arrow included
- LiFePO4 5 year warranty
- ICEL Certified 001-067

IP20 | 6500K | 5 Year Warranty | 30,000 Hours | 110°

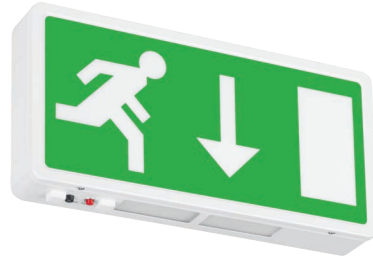

Code	Version	Wattage	Lumens	Size (mm)
EXIT3MLED	Emergency	4	55	390 x 192 x 60
Accessories				
EBLGDL		Signs Directive Left Legend		
EBLGDR		Signs Directive Right Legend		
EBLGDU		Signs Directive Up Legend		
ISOEBLGDU		ISO 7010 Up Arrow Legend		
ISOEBLGDR		ISO 7010 Right Arrow Legend		
ISOEBLGDD		ISO 7010 Down Arrow Legend		
ISOEBLGDL		ISO 7010 Left Arrow Legend		

Compact Emergency Exit Box.

IP20 | 6200K | 5 Year Warranty | 120° | LiFePO4
5 Year Warranty



Code	Version	Wattage	Lumens	Size (mm)
VECOEXIT3M	Emergency	4	70	300 x 180 x 40
SEEXITLI	Emergency	4	80	300 x 180 x 40
Accessories				
VECOISOD		ISO 7010 Down Arrow Legend		
VECOISOL		ISO 7010 Left Arrow Legend		
VECOISOR		ISO 7010 Right Arrow Legend		

Recessed Maintained Exit Sign.

The 2.5W LED recessed maintained emergency exit sign is designed with a slim low profile construction and provides visibility during both normal operation and emergency conditions. Perfect for commercial and retail applications.

- Polycarbonate body with edge lit acrylic
- ISO 7010 down arrow fitted as standard with additional up, left and right legends included
- Suitable for cut out 330-365mm x 45-75mm
- LiFePO4 5 Year Warranty



Code	Version	Wattage	Lumens	Size (mm)
E01RE1	Emergency, 6000K	2.5	50	380 x 224 x 90
Accessories				
E01REC	Filler Frame for Replacing LEDMDDEM3			400 x 135 x 2



Hanging Emergency Exit Sign.

- Remote connection box complete with adjustable length suspension cable (max. 80cm)
- Supplied with a double-sided exit legend
- Viewing distance 29m

IP20 | 6500K | 5 Year Warranty | 25,000 Hours | 110° | LiFePO4 5 Year Warranty



Code	Version	Wattage	Lumens	Size (mm)
SIGNLEDEM3	Emergency	3	50	340 x 227 x 45
Accessories				
SIGNLGD	Signs Directive Left/Right Arrow Legend			
SIGNLGDUP	Signs Directive Up Arrow Legend			
ISOSIGNLR	ISO 7010 Left/Right Arrow Legend			
ISOSIGND	ISO 7010 Down Arrow Legend			
ISOSIGNUP	ISO 7010 Up Arrow Legend			

Multi-Fixing Exit Sign.

- Ceiling, side, wall mounted and suspended
- 1m suspension cable included
- Recessed option available with EXITREC
- Supplied with ISO 7010 up arrow
- 3 hour maintained mode or non-maintained
- Viewing distance 30m



IP20 | 6000K | 5 Year Warranty | 120° | LiFePO4 5 Year Warranty


Code	Version	Wattage	Lumens	Size (mm)
EXITMMO	Emergency	2.8	38	350 x 235 x 42
Accessories				
EXITREC	White Recessed Mounting Kit for EXITMMO			
EMMOUP	Signs Directive Up Arrow Legend			
EMMOD	Signs Directive Down Arrow Legend			
EMMOLR	Signs Directive Left/Right Arrow Legend			
ISOMMOLR	ISO 7010 Left/Right Arrow Legend			
ISOMMOLRD	ISO 7010 Left/Right Down Arrow Legend			
ISOMMOLD	ISO 7010 Down Arrow Legend			

3W Remote LiFePO4 Emergency Battery Pack.



Code	Version	Wattage	Size (mm)
EBPM3LI	Standard	3	338 x 80 x 45

10-60V 100W Self-Test Emergency Battery Pack.

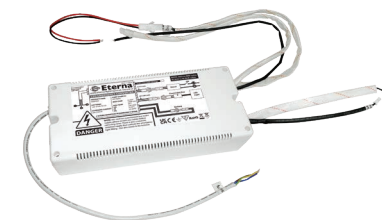

Code	Version	Wattage	Size (mm)
SEEBPM3	Self-Test	100	250 x 110 x 55

Battery Replacement Service.

Extend the life of your emergency products with a replacement of your Eterna batteries.

eterna-lighting.co.uk/battery-replacement-service



Commercial, Utility & Industrial

Bulkheads.

Orba.

Multiple 20mm conduit entries and a rear BESA fixing point enables the fitting to suit a number of applications, while the plug and play emergency and microwave sensor accessories offer quick and convenient flexibility.

- Power selectable: 8W, 14W, 16W
- CCT selectable: 2700K, 3000K, 4000K, 5000K, 6000K
- Multiple 20mm conduit entry points and rear BESA mounting
- Twist on opal diffuser, clip on white trim and hinged LED tray
- Plug and play accessories
- Loop in, loop out push fit terminals



PlugPack
Compatible

Code	Version	Wattage	Lumens	lm/W	Ø x H (mm)
E02B2W	Mini, White	9/12	1040-1400	115-116	260 x 75
E02BAACW	Standard, White	8/14/16	1000-1900	119-125	316 x 74
E02B4W	Large, White	16/20/24	1870-2650	111-119	400 x 78

PlugPack Accessories	
E02U01ES	2-in-1 Emergency Pack
E02U01MW	On/Off Microwave Sensor
E02U01SD	Step Dim MW Sensor


Trim Accessories	
E02B2TB	Mini Full Trim Black
E02B2TC	Mini Full Trim Chrome
E02BATB	Standard Full Trim Black
E02BATC	Standard Full Trim Chrome
E02BATIB	Standard Eyelid Trim Black
E02BATIW	Standard Eyelid Trim White
E02B4TB	Large Full Trim Black
E02B4TC	Large Full Trim Chrome



Lina.

The Lina is an IP66 amenity bulkhead that offers flexibility with 3 adjustable wattages and 5 colour temperatures. The Lina can suit both residential or commercial settings including perimeter lighting, paths, gardens, and staircases.

- Power selectable 8W, 14W, 16W
- CCT selectable 2700K, 3000K, 4000K, 5000K, 6000K
- Central integrated emergency LED array
- Fastened opal polycarbonate diffuser with a twist on trim
- Hinged LED tray
- Two 20mm rear cable entries and central mounted BESA point
- Loop in, loop out push fit terminals

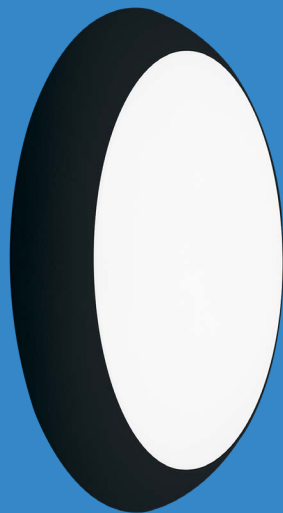

PlugPack
Compatible

IP66

IK08

5 Year

50k
Hours

CCT

120°

Code	Version	Wattage	Lumens	lm/W	Ø x H (mm)
E02LNACB	Black Full Trim	8/14/16	1000-1900	119-125	305 x 70
E02LNACIB	Black Eyelid Trim	8/14/16	500-1000	63	305 x 70
E02LNACW	White Full Trim	8/14/16	1000-1900	119-125	305 x 70
E02LNACIW	White Eyelid Trim	8/14/16	500-1000	63	305 x 70

PlugPack Accessories

E02U01ES	2-in-1 Emergency Pack
E02U01MW	On/Off Microwave Sensor
E02U01SD	Step Dim MW Sensor



Kora.

Multiple conduit entries and a BESA fixing point enables the fitting to suit a number of applications, while the plug and play emergency and microwave sensor accessories offer quick and convenient flexibility.

- Power selectable 8W, 14W, 16W
- CCT selectable 2700K, 3000K, 4000K, 5000K, 6000K
- Multiple 20mm conduit entry points and rear BESA mounting
- Opal screw on diffusers
- Loop in, loop out push fit terminals
- Clip-on decorative trims available
- Photocell version preset dusk till dawn operation



PlugPack
Compatible

IP65

IK10

5 Year

50k
Hours

CCT

120°

Code	Version	Wattage	Lumens	lm/W	Ø x H (mm)
E02KRAC	Standard	8/14/16	1000-1900	119-125	300 x 95
E02KRAC6	Photocell	8/14/16	1000-1900	119-125	300 x 95

PlugPack Accessories

E02U01ES	2-in-1 Emergency Pack
E02U01MW	On/Off Microwave Sensor
E02U01SD	Step Dim MW Sensor

Trim Accessories

CIRCBK	Black Full Trim
CIRCWH	White Full Trim
CIRCCR	Chrome Full Trim
EYEBK	Black Eyelid Trim
EYEW	White Eyelid Trim




Reba Square.

The Reba square utility bulkhead comes with opal and prismatic diffusers, in white or black to suit varying project requirements.

Multiple conduit entries and a BESA fixing point ensures multiple install methods are met, while the plug and play emergency and microwave sensor accessories offer quick and convenient flexibility.

- Power selectable: 8W, 14W, 16W
- CCT selectable: 2700K, 3000K, 4000K, 5000K, 6000K
- Multiple 20mm conduit entry points and rear BESA mounting
- Prismatic and opal screw on diffusers
- Plug and play emergency pack and on/off or step dim sensors available
- Loop in, loop out push fit terminals

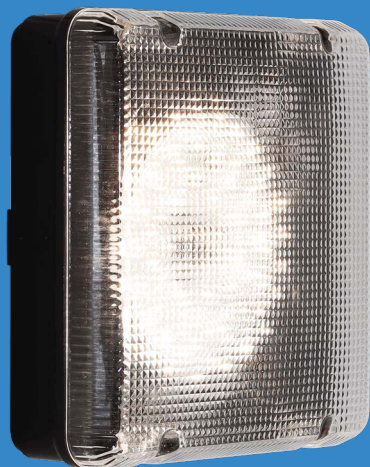

PlugPack
Compatible

IP65

IK10

5 Year

50k
Hours

CCT

120°

Code	Version	Wattage	Lumens	lm/W	Size (mm)
E02RAS2B	Black, Square, Opal	8/14/16	1000-1950	122-125	255 x 255 x 85
E02RAS2W	White, Square, Opal	8/14/16	1000-1950	122-125	255 x 255 x 85
E02RAS1B	Black, Square, Prismatic	8/14/16	1200-2145	134-150	255 x 255 x 85
E02RAS1W	White, Square, Prismatic	8/14/16	1200-2145	134-150	255 x 255 x 85

PlugPack Accessories

E02U01ES	2-in-1 Emergency Pack
E02U01MW	On/Off Microwave Sensor
E02U01SD	Step Dim MW Sensor



Reba Circular.

The Reba circular utility bulkhead comes with opal and prismatic diffusers, in white or black to suit varying project requirements.

Multiple conduit entries and a BESA fixing point ensures multiple install methods are met, while the plug and play emergency and microwave sensor accessories offer quick and convenient flexibility.

- Power selectable: 8W, 14W, 16W
- CCT selectable: 2700K, 3000K, 4000K, 5000K, 6000K
- Multiple 20mm conduit entry points and rear BESA mounting
- Prismatic and opal screw on diffusers
- Plug and play emergency pack and on/off or step dim sensors available
- Loop in, loop out push fit terminals



PlugPack
Compatible

IP65

IK10

5 Year

50k
Hours

CCT

120°

Code	Version	Wattage	Lumens	lm/W	Ø x H (mm)
E02RAC2B	Black, Circular, Opal	8/14/16	1000-1950	122-125	Ø 288 x 85
E02RAC2W	White, Circular, Opal	8/14/16	1000-1950	122-125	Ø 288 x 85
E02RAC1B	Black, Circular, Prismatic	8/14/16	1200-2145	134-150	Ø 288 x 85
E02RAC1W	White, Circular, Prismatic	8/14/16	1200-2145	134-150	Ø 288 x 85

PlugPack Accessories

E02U01ES	2-in-1 Emergency Pack
E02U01MW	On/Off Microwave Sensor
E02U01SD	Step Dim MW Sensor



Saya.

The Saya bulkhead features a sleek dome diffuser with power and colour switchable option, allowing seamless adaptation to any environment.

Crafted from robust polycarbonate, it delivers long-lasting performance in both indoor and outdoor settings.

- Power selectable 8W, 14W, 16W
- CCT selectable, 2700K, 3000K, 4000K, 5000K, 6000K
- Up to 116lm/W
- BESA mounting option
- Twist on diffuser trim and a hinged LED tray
- Available accessories in black trim or chrome trim
- Plug and play emergency pack, microwave sensor, plus a microwave sensor with step dim function
- Loop in, loop out push fit terminals



PlugPack
Compatible

IP65

IK10

5 Year

50k Hours

CCT

120°

Code	Version	Wattage	Lumens	lm/W	Ø x H (mm)
E02SYAC	Standard, White	8/14/16	935-1760	110-116	325 x 110

PlugPack Accessories		Trim Accessories	
E02U01ES	2-in-1 Emergency Pack	E02SYTB	Full Black Trim
E02U01MW	On/Off Microwave Sensor	E02SYTC	Chrome Full Trim
E02U01SD	Step Dim MW Sensor		



Moon.

The Moon bulkhead is a decorative IP54 trimless luminaire with 3 adjustable colour temperatures with an output of over 1900 lumens to suit a range of commercial and domestic applications.

The slim line design and wide light distribution creates a contemporary feel and comes complete with a concealed push release mounting bracket for ceiling and wall installations. A range of full and eyelid clip on trim accessories are available in black and white to suit different design requirements.

- High lumen efficiency 110lm/w
- CCT Switchable 3000K, 4000K, 6000K
- Concealed white base with push release rear mounting bracket
- Trimless design, full and eyelid trims available
- Rear connection with push fit terminals



IP54

IK06

5 Year

50k Hours

CCT

120°

Code	Version	Wattage	Lumens	lm/W	Ø x H (mm)
E02MN28C	Circular, Opal, Trimless	18	1980-1985	110	280 x 50

Accessories	
E02MN28TB	Full Trim Black
E02MN28TW	Full Trim White
E02MN28TIB	Eyelid Trim Black
E02MN28TIW	Eyelid Trim White
E02MN28TI2B	Keyhole Trim Black
E02MN28TI2W	Keyhole Trim White



Skye.

The Skye is a durable IP65 aluminium bulkhead. Designed with a polycarbonate diffuser and multiple conduit entries.

Available with full and eyelid trims and in a range of variants including emergency, step dim and on/off microwave, to suit a number of applications.

- Power selectable 8W, 14W, 16W
- CCT selectable 2700K, 3000K, 4000K, 5000K, 6000K
- IP65 and IK10 rating
- Robust aluminium construction with captive stainless steel screws
- Multiple 20mm conduit entry points with loop in, loop out push fit terminals
- Available in Emergency, On/Off Microwave and Step Dim versions



IP65

IK10

5 Year

50k Hours

CCT

120°

Code	Version	Wattage	Lumens	lm/W	Ø x H (mm)
E02SKACB*	Black Full Trim	8/14/16	900-1700	106-113	360 x 70
E02SKACIB*	Black Eyelid Trim	8/14/16	610-1200	75-76	360 x 70
E02SKACW*	White Full Trim	8/14/16	900-1700	106-113	360 x 70
E02SKACIW*	White Eyelid Trim	8/14/16	610-1200	75-76	360 x 70

Code Suffix*	Version
1	2-in-1 Emergency
2	On/Off Microwave
3	2-in-1 Emergency, On/Off Microwave
4	Step-Dim Microwave
5	2-in-1 Emergency, Step-Dim Microwave



Carina.

A versatile range of decorative bulkheads, offering practicality and style with multiple functional options – perfect for superior leisure, hotels & outdoor applications.

- Polycarbonate construction
- Full circular LED array
- IP65, ceiling or wall mounted
- Central BESA box mounting option on the base
- Colour temperature selectable – options of 3100K, 4200K & 6400K easily set by a dip switch on the gear tray
- Plug in connector between the terminal block and the gear tray. Terminal block is located on the base, allowing for easy wiring and the gear tray to be removed during installation



IP65

IK08


5 Year

50k Hours

CCT

120°

Code	Version	Wattage	Lumens	lm/W	Ø x H (mm)
CSLEDWH	Standard, White	17	1480-1580	87-93	325 x 110
CSLEDWHEM3	Emergency, White	17	1480-1580	87-93	325 x 110
MSCSLEDWH	Microwave, White	17	1480-1580	87-93	325 x 110
MSCSLWHEM3	Emergency, MW, White	17	1480-1580	87-93	325 x 110
SDCSLWHEM3	Emergency, SD, White	17	1480-1580	87-93	325 x 110
CSLEDCR	Standard, Chrome	17	1480-1580	87-93	325 x 110
CSLEDCREM3	Emergency, Chrome	17	1480-1580	87-93	325 x 110
MSCSLEDCR	Microwave, Chrome	17	1480-1580	87-93	325 x 110
MSCSLCREM3	Emergency, MW, Chrome	17	1480-1580	87-93	325 x 110
SDCSLEDCR	Step Dim MW, Chrome	17	1480-1580	87-93	325 x 110
SDCSLCREM3	Emergency, SD, Chrome	17	1480-1580	87-93	325 x 110

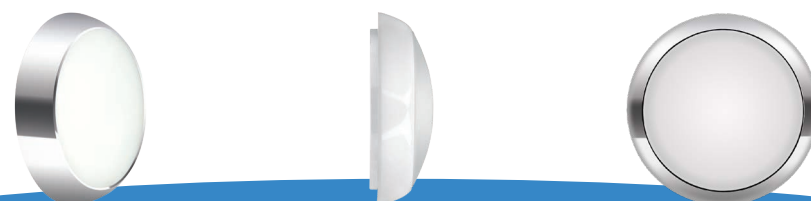


Universal Retrofit Gear Tray.

The universal retrofit LED gear tray is ideal for the replacement or upgrade of existing bulkheads, with 3 adjustable outputs and 5 colour temperature options built-in.

Suitable for a number of applications and available in a range of variants including, emergency or microwave.

- Power selectable 8W, 14W, 16W
- CCT selectable, 2700K, 3000K, 4000K, 5000K, 6000K
- Wide optics engineered for an even distribution
- Multiple keyhole slots, will fit many existing 2D fittings
- Sensor version; on/off microwave, with adjustable time, lux and detection area
- Emergency version; standard or self-test built in

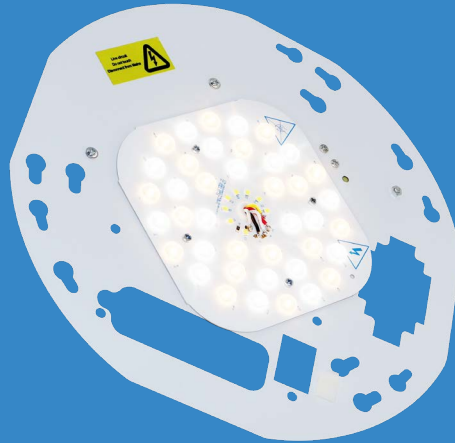

Code	Version	Wattage	Lumens	lm/W	Ø x H (mm)
E02G01AC	Standard	8/14/16	1300-2400	150-163	250 x 40
E02G01AC1	2-in-1 Switchable Emergency/Self-Test	8/14/16	1300-2400	150-163	250 x 40
E02G01AC2	On/Off Microwave	8/14/16	1300-2400	150-163	250 x 40
E02G01AC3	2-in-1 Switchable Emergency/Self-Test, On/Off Microwave	8/14/16	1300-2400	150-163	250 x 40
E02G01AC4	Step Dim Microwave	8/14/16	1300-2400	150-163	250 x 40
E02G01AC5	2-in-1 Switchable Emergency/Self-Test, Step Dim Microwave	8/14/16	1300-2400	150-163	250 x 40



Cassi.

Cassi circular compact bulkhead range offers a practical solution for areas requiring a small bulkhead. A design ideal for utility areas: wall or ceiling mounted. Available in two sizes to suit different output requirements.

IP54 | IK08 | 4000K | 5 Year Warranty | 120°



Code	Version	Wattage	Lumens	lm/W	Ø x H (mm)
KCAS8BKFL	Black, full trim	8	900	113	173 x 51
KCAS8WHFL	White, full trim	8	900	113	173 x 51
KCAS14BKFL	Black, full trim	14	1570	112	228 x 51
KCAS14WHFL	White, full trim	14	1570	112	228 x 51

External Polycarbonate Bulkhead.

General purpose IP65 mini LED bulkhead available with or without an integral photocell. Front opal diffuser creates an effective and efficient light output for functional applications such as, porch lighting, side access and security lighting.

IP65 | IK08 | 4000K | 5 Year Warranty | 120°



Code	Version	Wattage	Lumens	lm/W	Size (mm)
KRECB0PL	Standard	10	1045	105	230 x 110 x 105
KRECB0PLPC	Photocell	10	1045	105	230 x 110 x 105

Bulkhead with E27 Lampholder.

IP65 Bulkhead with E27 Lamp Holder. Requires 1x suitable E27 lamp (not included). Easy connection directly into the lampholder. Pre-formed 20mm cable entry knockouts on each end and one on rear

IP65 | IK08 | 1 Year Warranty



Code	Version	Size (mm)
BH100E27	E27	238 x 110 x 110

White Utility Bulkhead.

A simple compact bulkhead with multiple 20mm cable entries for quick and easy installation.

IP65 | 4000K | 5 Year Warranty | 120°



Code	Version	Wattage	Lumens	lm/W	Size (mm)
ATOM5	Non-Dimmable	6	710	118	165 x 115 x 75

CCT PIR Bulkhead.

Durable and attractive oval waterproof bulkhead with selectable CCT and PIR, perfect for exteriors and high-traffic circulation areas.

IP65 | IK05 | 3000K/4000K/6000K | 5 Year Warranty | 120°



Code	Version	Wattage	Lumens	lm/W	Size (mm)
BHPIRCS	PIR	10	1166-1252	117-125	210 x 120 x 65

Prismatic Bulkhead.

Energy efficient LED alternative to traditional bulkheads. Small robust bulkhead that offers durability for domestic and light commercial applications.

IP44 | IK08 | 3100K | 5 Year Warranty | 120°



Code	Version	Wattage	Lumens	lm/W	Size (mm)
BLEDBK	Standard	7	500	71	265 x 115 x 110
BLEDPIRBK	PIR	7	520	74	265 x 115 x 110





Commercial, Utility & Industrial


Interior Battens.

Amplus.

The Amplus indoor batten range offers both wattage and colour temperature selection enabling 12 combinations into a single fitting.

The Amplus is designed for simple and quick installation with a hinged front diffuser for easy access to the gear tray, with plug and play emergency and microwave sensor accessories to suit multiple applications.

- High lumen efficiency 150lm/W
- Power selectable
- CCT switchable 3000K, 4000K, 6000K
- 20mm conduit entry and BESA fixing points
- Hinged front diffuser for easy access to gear tray
- Opal polycarbonate diffuser
- Plug and play microwave sensor and standard emergency pack available
- Compatible with ELESUSPACK

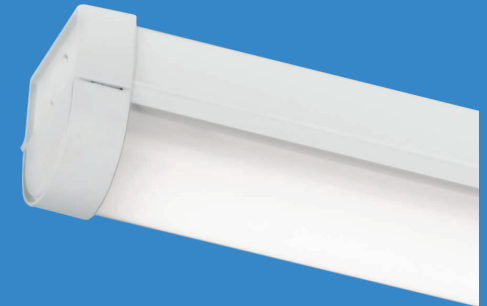

Code	Version	Wattage	Lumens	lm/W	Size (mm)
E04AP4AC	4ft	21/27/32/38	3150-5700	150	1172 x 62 x 74
E04AP5AC	5ft	29/36/44/52	4350-7800	150	1462 x 62 x 74
E04AP6AC	6ft	33/42/51/60	4960-9000	150	1732 x 62 x 74
Accessories					
E04APFSEM	Amplus Foris Plug Play 3W Standard Emergency Pack				
E04APFSMS	Amplus Foris Plug Play On/Off Microwave Sensor				
ELESUSPACK	ELEGANCE5 Suspension Kit				



Verus.

The Verus linear batten offers both wattage and colour temperature selection. The Verus comes complete with 20mm conduit entry points at both ends and BESA fixing points to the rear.

The plug and play emergency and microwave sensor enable further flexibility to suit varying requirements on site.

- High lumen efficiency up to 125lm/W
- Power selectable
- CCT switchable 3000K, 4000K, 6000K
- 20mm conduit entry and BESA fixing points
- Steel housing and opal polycarbonate diffuser
- Plug and play microwave sensor and standard emergency pack available



IP20

IK06

5 Year

50k
Hours

CCT

120°

Code	Version	Wattage	Lumens	lm/W	Size (mm)
E04VS4AC	4ft	21/27/32/38	2625-4750	125	1222 x 199 x 82
E04VS5AC	5ft	32/41/50/58	4000-7250	125	1522 x 199 x 82
E04VS6AC	6ft	36/46/55/65	4500-8125	125	1822 x 199 x 82
Accessories					
E04VSEM	Verus Plug Play 3W Standard Emergency Pack				
E04VSMS	Verus Plug Play On/Off Microwave Sensor				




BATLED.

The BATLED indoor batten range available in 4ft, 5ft, 6ft offers both wattage and colour temperature selection enabling 12 combinations into 1 fitting.

The BATLED is designed for simple and quick installation with a hinged front diffuser for easy access to the gear tray, with plug and play emergency and PIR sensor accessories to suit multiple applications.

- High lumen efficiency 140lm/W
- Power selectable
- CCT seelctable 3000K, 4000K, 6000K
- 20mm conduit entry and BESA fixing points
- Hinged front diffuser for easy access to gear tray
- Opal polycarbonate diffuser
- Plug and play PIR sensor and standard emergency pack available

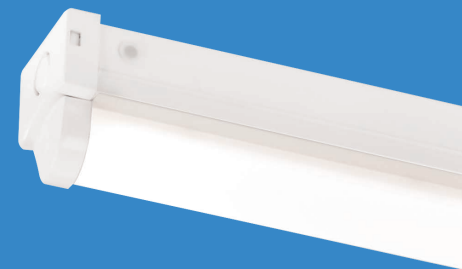

IP20

5 Year


50k
Hours

CCT

120°

Code	Version	Wattage	Lumens	lm/W	Size (mm)
E04BL4AC	4ft	21/27/32/38	2940-5040	136-140	1168 x 62 x 74
E04BL5AC	5ft	28/35/43/51	3860-6760	132-137	1458 x 62 x 74
E04BL6AC	6ft	32/41/50/59	4585-7800	132-143	1728 x 62 x 74
Accessories					
E04UPIR	PIR Sensor Add-On for BATLED Batten				
E04APFSEM	Plug Play 3W Standard Emergency Pack				



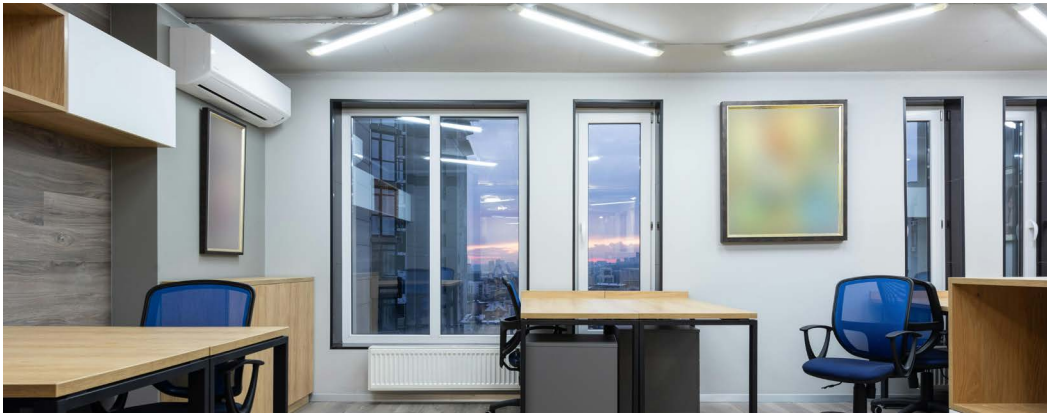

Elegance Twin Slimline.

A slim, modern design LED ceiling fitting which offers a more stylish alternative to traditional battens. Where a more aesthetically pleasing fixture is desirable, this versatile and elegant light source is suitable for commercial, retail and domestic applications.



IP20 | 4000K | 5 Year Warranty | 120°

Code	Version	Wattage	Lumens	lm/W	Size (mm)
ELEGANCE5	Standard	50	5000	100	1503 x 127 x 43
ELEGANCE5EM3	Emergency	50	5000	100	1503 x 127 x 43
Accessories					
ELESUSPACK	1m suspension pack for Elegance Range				





Commercial, Utility & Industrial

Exterior Battens.

Foris.

The Foris anti-corrosive linear batten offers both wattage and colour temperature selection enabling 12 combinations into 1 fitting.

The Foris comes complete with pre-drilled 20mm conduit entry points (capped), stainless steel retaining clips that require a flat head screwdriver to gain access and flexible bracket sliders to suit retrofit positioning. The plug and play emergency and microwave sensor enables further flexibility to suit varying requirements on site.

- High lumen efficiency 150lm/w
- Power selectable
- CCT switchable 3000K, 4000K, 6000K
- 20mm conduit entry at both ends and rear (ends pre-drilled and capped)
- Stainless steel clips
- Supplied with IP cable grommet, 2x ceiling brackets



Code	Version	Wattage	Lumens	lm/W	Size (mm)
E05FS4AC	4ft	17/21/26/30	2550-4500	150	1200 x 105 x 79
E05FS5AC	5ft	28/35/43/50	4200-7500	150	1500 x 105 x 79
E05FS6AC	6ft	31/40/48/57	4650-8550	150	1800 x 105 x 79
Accessories					
E04APFSEM	Amplus Foris Plug Play 3W Standard Emergency Pack				
E04APFSMS	Amplus Foris Plug Play On/Off Microwave Sensor				



Nano Utility Weatherproof Batten.

Slim profile batten available in 600mm, 1200mm and 1500mm, offering even light distribution, single end cable entry through an IP gland with push fit terminals for easy installation. Supplied with ceiling wall clips.



IP65 | 4000K | 5 Year Warranty | 120°

Code	Version	Wattage	Lumens	lm/W	Size (mm)
KNANOIP2FT	2ft	15	1835	122	600 x 48 x 38
KNANOIP4FT	4ft	22	2550	116	1200 x 48 x 38
KNANOIP5FT	5ft	25	3070	123	1500 x 48 x 38



Pre-Wired Weatherproof Batten.

Low profile IP65 batten which is half the height of a typical weatherproof. The batten offers a slim design to suit certain applications. Pre-wired with a 1.5m flex makes installation quick and simple.



IP65 | 4000K | 5 Year Warranty | 120°

Code	Version	Wattage	Lumens	lm/W	Size (mm)
VECOWP5FT	5ft	45	4400	98	1500 x 52 x 35






Commercial, Utility & Industrial

Panels.

Capax.

The Capax TP(b) UGR19 rated backlit panel delivers high levels of efficiency, achieving low glare and effective light distribution. The dual power and three colour temperature options within the panel offers significant versatility for a wide range of applications including commercial and educational environments.


- High efficiency 130 lm/w
- 35mm deep design
- Dual power, dip switch adjustable on the driver
- CCT selectable 3000K/4000K /6000K, CCT switch on panel cable - set to 4000K as standard
- TP(b) rated UGR19 diffuser
- L80B50 50,000hrs
- Non-dimmable driver included. Dali and 0-10V driver options available

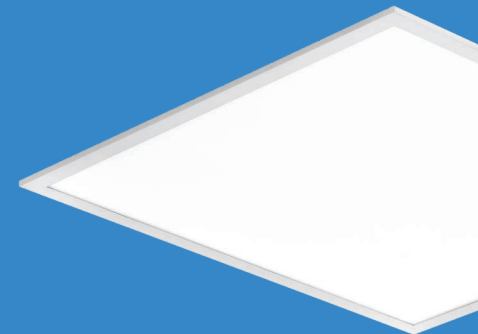

Code	Version	Wattage	Lumens	lm/W	Size (mm)
E03CP60AC	Non-Dimmable	25/36	3250-4770	130-133	595 x 595 x 28
E03CP636CD	DALI-2	36	4670-4770	130-133	595 x 595 x 28
E03CP12AC	Non-Dimmable	40/58	5250-7630	130-133	1195 x 595 x 33
E03CP1258CD	DALI-2	58	7540-7630	130-133	1195 x 595 x 33

Accessories

EBPM3LI	3W Remote LiFePO4 Emergency Battery Pack
SURFACEMK	Surface Mounting Box for 600x600 LED Panels
SURFMK12	Surface Mounting Box for 1200x600 LED Panels
PANSUSKIT	Suspension Pack for LED Panels





Commercial, Utility & Industrial

Commercial Downlights.

Vinko Commercial Downlight.

Vinko is a versatile recessed fitting designed for commercial spaces. With multiple sizes, selectable power outputs, and three colour temperatures, it adapts effortlessly to any environment.

An optional plug-and-play emergency pack ensures fast, hassle-free emergency lighting conversion.

- Power selectable
- CCT selectable, 3000K, 4000K, 6000K
- Up to 127lm/w
- IP44 from the front with TP(a) rated diffuser
- Non-dimmable driver included. Dali option available
- Plug and play emergency pack available
- Loop in, loop out push fit terminals
- 5 year warranty



Code	Version	Cut Out (mm)	Wattage	Lumens	lm/W	Ø x H (mm)
E08VR10AC	Non-Dimmable	100	5/7	590-795	114-118	120 x 55
E08VR10ACD	Dali-Dimmable	100	7	795	114	120 x 55
E08VR15AC	Non-Dimmable	150	8/11/13	1016-1535	118-127	170 x 69
E08VR15CD	Dali-Dimmable	150	13	1535	118	170 x 69
E08VR20AC	Non-Dimmable	200-240	12/15/18	1460-2200	122-123	250 x 80
E08VR20CD	Dali-Dimmable	200-240	18	2200	122	250 x 80



Vinko Surface Mount Downlight.

The Vinko surface mount downlight has been designed with power and temperature selectable options. Its adjustable mounting bracket makes it perfect for both retrofit and new installations.

Suitable for domestic, residential or commercial locations. This fitting combines sleek design bringing effortless style and efficiency.

- Suitable for both surface and recessed applications
- Power selectable
- CCT selectable: 3000K/4000K/6000K
- Up to 122lm/W
- IP40 From the front
- Loop in, loop out push fit terminals
- 5 year warranty



Code	Version	Cut Out (mm)	Wattage	Lumens	lm/W	Ø x H (mm)
E08VN23AC	235mm	100-180	9/12/15	1100-1774	118-122	235 x 22
E08VN30AC	300mm	100-230	14/18/22	1774-2642	118-122	300 x 22



Recessed Flat Downlight.


This range is ideal for many applications, with high lumen efficiency for enhanced energy saving and colour temperature selection allowing the desired lighting effect to be chosen on installation.

IP44 | 3000K/4000K/6000K | 5 Year Warranty | 120°



Code	Cut Out (mm)	Wattage	Lumens	lm/W	Ø x H (mm)
KFLATDL12	155	12	1250-1300	104-108	175 x 18
KFLATDL18	210	18	1900-1970	106-109	240 x 20
KFLATDL24	280	24	2500-2530	104-105	300 x 21



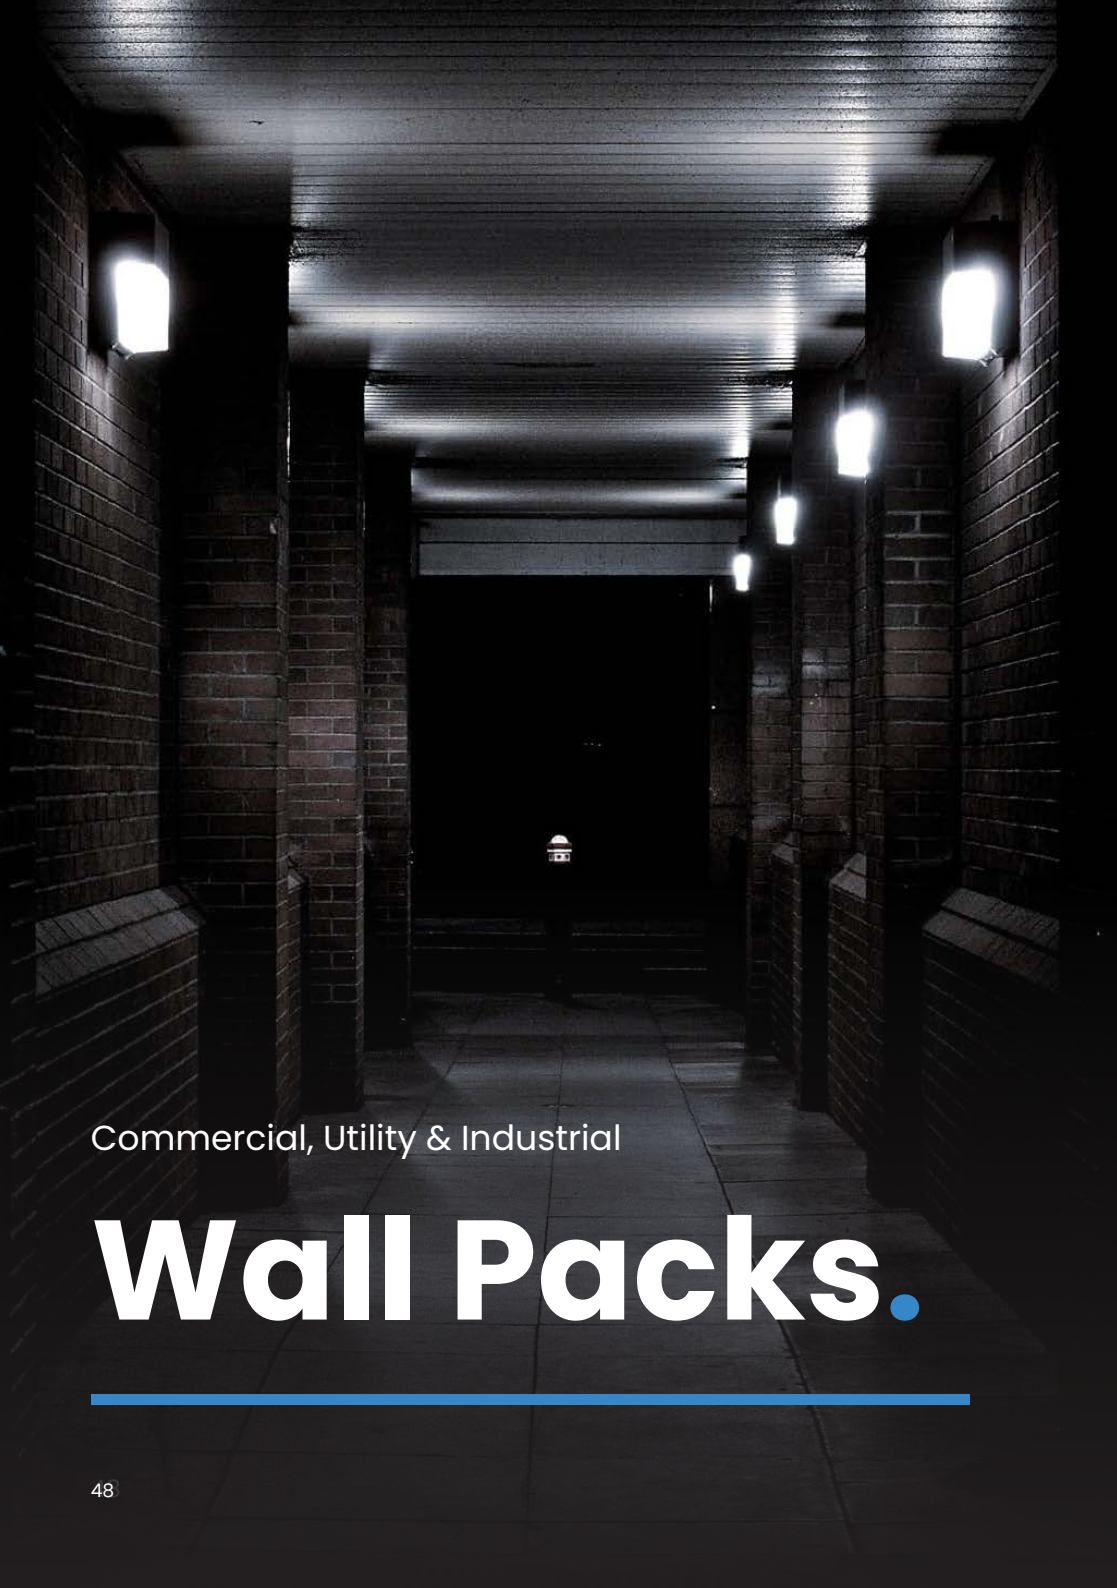

Commercial, Utility & Industrial

Wall Packs.

Hadi.

The Hadi is a robust IP65 wall pack, with 2 adjustable outputs delivering up to 2600 lumens and 3 colour temperature options built-in. Designed with a polycarbonate diffuser and multiple conduit entries and rear BESA mounting.

Available in a range of variants including photocell, emergency or microwave, to suit a number of applications.

- Power selectable 16W or 24W – Up to 112lm/W
- CCT selectable: 3000K, 4000K, 6000K
- Hinged front for easy access with captive stainless steel screws
- Multiple 20mm conduit entry points with loop in, loop out push fit terminals and rear BESA mounting



Code	Version	Wattage	Lumens	lm/W	Size (mm)
E02HDAC	Standard	16/24	1800-2600	108-113	310 x 265 x 122
E02HDAC1	2-in-1 Emergency	16/24	1800-2600	108-113	310 x 265 x 122
E02HDAC2	On/Off Microwave	16/24	1800-2600	108-113	310 x 265 x 122
E02HDAC3	2-in-1 Emergency, On/Off Microwave	16/24	1800-2600	108-113	310 x 265 x 122
E02HDAC6	Photocell	16/24	1800-2600	108-113	310 x 265 x 122
E02HDAC7	2-in-1 Emergency, Photocell	16/24	1800-2600	108-113	310 x 265 x 122

Munio.

The Munio is a modern robust IP65 wall pack with three adjustable outputs and four colour temperature options built-in offering flexible lighting solutions for various applications.

The low glare ABS diffuser is designed to minimise upward light. Available in multiple pre-built variants including photocell and emergency to suit a number of applications.

- High lumen efficiency 133lm/W
- Power selectable 16W, 20W, 24W
- Colour temperature selectable 2700K, 3000K, 4000K, 6000K
- Hinged front for easy access
- 20mm BESA and conduit entry points with loop in, loop out push fit terminals
- Photocell version: preset integrated dusk till dawn operation
- Emergency version: emergency output 160lm



IP65

IK10

5 Year

50k Hours

CCT

95°

Code	Version	Wattage	Lumens	lm/W	Size (mm)
E02MU3AC	Standard	16/20/24	2120-3195	133-134	300 x 250 x 165
E02MU3AC1	Emergency	16/20/24	2120-3195	133-134	300 x 250 x 165
E02MU3AC6	Photocell	16/20/24	2120-3195	133-134	300 x 250 x 165
E02MU3AC7	Emergency, Photocell	16/20/24	2120-3195	133-134	300 x 250 x 165



LED Well Glass.

Flexible and decorative range of fittings ideally suited for outdoor applications requiring corner lights. Complete solution for flat wall or corner mounting. Bracket included for optional corner mounting. Polycarbonate construction in white or black finish with opal polycarbonate diffuser



IP65 | 4000K | 5 Year Warranty | 120°

Code	Version	Wattage	Lumens	lm/W	Size (mm)
WELLBKSTD	Standard, Black	10	818	82	214 x 122 x 197
WELLWHSTD	Standard, White	10	818	82	214 x 122 x 197
WELLBKPIR	PIR, Black	10	818	82	227 x 122 x 197
WELLWHPIR	PIR, White	10	818	82	227 x 122 x 197

E27 Well Glass.

The well glass external wall fitting is available in a tough polycarbonate diffuser to give a similar style to a tradition glass lantern fixture. The fixture comes complete with an LED E27 lamp for ease of maintenance and an additional corner bracket accessory for corner wall positions to save on installing fixtures either side of the wall.



IP65 | 2700K | 5 Year Warranty | 220° Beam Angle

Code	Version	Wattage	Lumens	lm/W	Size (mm)
WGLED BK	Standard, Black	9.5	810	85	240 x 220 x 130
WGLED WH	Standard, White	9.5	810	85	240 x 220 x 130
Accessories					
WELLDIFF	Replacement Polycarbonate Diffuser				

Slim Wall Pack.

Slim profile and durable wall pack, available with colour temperature selection to suit different applications. The design offers a contemporary slimmer update to the traditional wall pack available with further energy savings with an option of an integrated photocell.



IP65 | IK10 | 3000K/4000K/6000K | 5 Year Warranty | 120°

Code	Version	Wattage	Lumens	lm/W	Size (mm)
WPCSBK	Standard, Black	17	1580-1645	93-97	275 x 185 x 70
WPCSBKPC	Photocell, Black	17	1580-1645	93-97	275 x 185 x 70



Commercial, Utility & Industrial

High Bay & Low Bay.

Ara.


The Ara highbay offers a flexible solution delivering high levels of efficiency. As standard, the Ara comes complete with a front plug-in sensor port ready to use the plug in step dim Ara microwave sensor for additional energy savings or utilise the 0-10V connection for added control. The three power options built in offers flexibility to suit many retrofit and new warehouse applications.

- High efficiency 180lm/W
- Delivering up to 27,000lm
- Three power selections 90W, 120W, 150W – Set to 150W as standard
- Microwave sensor port for plug in Ara sensor (sensor available separately)
- Central integrated emergency LED array when in emergency mode
- Plug in 5W self-test emergency pack available
- 0-10V dimmable



Code	Version	Wattage	Lumens	lm/W	Ø x H (mm)
E07ARA40	0-10V Dimmable	90/120/150	16200-27000	180	290 x 160
Accessories					
E07ARES	Ara Emergency 5W Self-Test Pack				
E07ARL90	Ara 90° Lens				
E07ARMW	Ara Microwave Sensor with Corridor Function				
E07ARRC	Ara Microwave Sensor Remote Control				
E07ARSM	Ara Surface Mount Bracket				



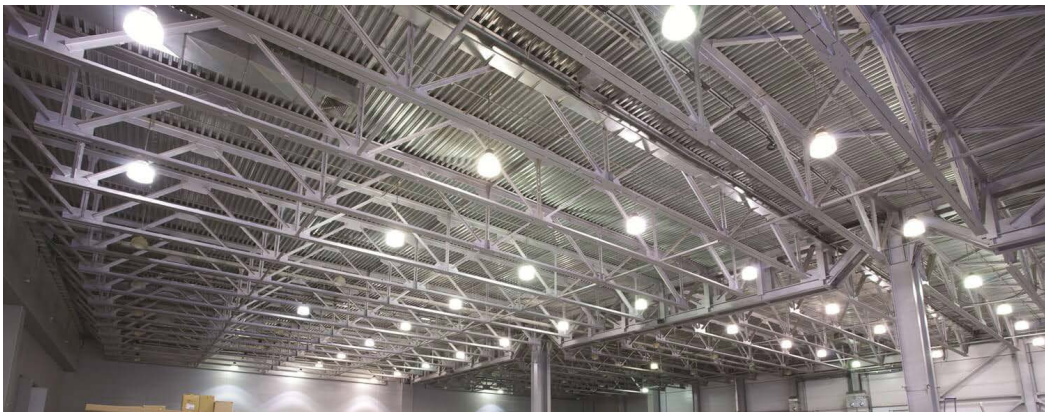

Linear Low Bay Batten.

A simple and practical range of low bays for warehouse lighting, the frosted diffuser creates an even light distribution making it suitable for a range of applications including public spaces and utility areas. The low bay comes complete with a suspension pack or brackets are available separately.



IP40 | IK10 | 4000K | 5 Year Warranty | 120°

Code	Version	Wattage	Lumens	lm/W	Size (mm)
LEDLBAY30	Standard	30	3600	120	371 x 103 x 81
LEDLBAY50	Standard	50	6260	125	522 x 103 x 81
LEDLBAY80	Standard	80	9730	122	820 x 103 x 81
LEDLBAY120	Standard	120	14310	119	1220 x 103 x 81
Accessories					
LBB3050	Fixing Bracket for LEDLBAY30 / LEDLBAY50				
LBB80	Fixing Bracket for LEDLBAY80				
LBB120	Fixing Bracket for LEDLBAY120				






Commercial, Utility & Industrial

Site Lights.

110V Anti-Corrosive Batten.

The 110V anti-corrosive linear batten, available in 2ft, 4ft & 5ft comes complete with pre-drilled 20mm conduit entry points (capped), stainless steel retaining clips as standard and flexible bracket sliders to suit retrofit positioning.

- High lumen efficiency 120lm/W
- 20mm conduit entry at both ends and rear (ends predrilled and capped)
- Stainless steel clips - flat head screwdriver required to gain entry
- Supplied with IP cable grommet and 2x ceiling brackets
- Emergency version available
- 3 year warranty

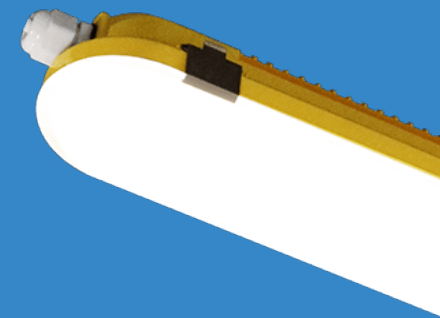

IP65

IK08

3 Year

50k
Hours

120°

Code	Version	Wattage	Lumens	lm/W	Size (mm)
E14WP2F*	2ft, 4000K	20	2400	120	650 x 85 x 79
E14WP4F*	4ft, 4000K	25	3105	124	1200 x 85 x 79
E14WP5F*	5ft, 4000K	35	4540	130	1500 x 85 x 79

Code Suffix*	Version
1	Emergency
CF	Cable Kit with Junction Box
MF	Cable Kit with Male/Female Connector




110V Bulkhead.

A robust rectangular emergency bulkhead designed for 110V applications, supplied in maintained mode with the option to convert to non-maintained operation as required. This energy-efficient 3W luminaire delivers 280 lumens in mains mode and 130 lumens in emergency mode, ensuring reliable illumination during power loss.

The unit is supplied with a full ISO 7010-compliant legend set, with additional directional sign options available.

- Polycarbonate construction
- Hinged gear tray
- Push terminals
- 20mm gland entries as standard
- 3 hour maintained mode configurable to non maintained
- ISO 7010 legend set included
- 3 year product and battery warranty

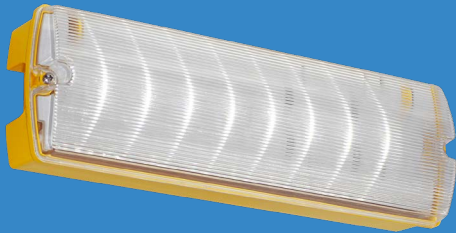

IP65

IK08

3 Year

50k Hours

120°

Code	Version	Wattage	Lumens	lm/W	Size (mm)
E14BH1	Maintained Emergency, 6000K	3	280	93	355 x 110 x 70
Accessories					
LGDSET	Signs Directive Legend Sticker Set				



110V Twinspot.

The emergency 110V twinspot features two fully adjustable heads delivering a combined 400 lumen output for reliable emergency site lighting.

Designed for quick, hassle-free installation, this non-maintained unit is ideal for commercial and industrial applications.

- Polycarbonate construction
- Twin 2.5W LED adjustable and tiltable heads
- Push fit terminals
- 20mm side entry points
- 3 hour non-maintained manual test function



IP65

IK08

3 Year

50k Hours

120°

Code	Version	Wattage	Lumens	lm/W	Size (mm)
E14TW1	Non-maintained Emergency, 6000K	5	400	80	300 x 294 x 74




110V Festoon.

Our connectable 110V festoon kit range includes 12m, 22m and 50m lengths. Each kit includes a male and female connector to daisy chain, and a 1m starter cable, allowing you to link them in any combination up to 200m.

This makes on-site extension quick and hassle-free.

- 12m, 22m and 50m lengths delivering up to 107lm/W
- Polycarbonate site light yellow housing
- 1m starter cable with industrial 3 pin plug
- L70 50,000 hours
- 3 year warranty



IP44

IK10

3 Year

50k Hours

120°

Code	Version	Wattage	Lumens	lm/W	Head Size (mm)
E14CF12	12m, 6000K	30	3140	105	75 x 75 x 63
E14CF22	22m, 6000K	50	5355	107	75 x 75 x 63
E14CF50	50m, 6000K	100	10710	107	75 x 75 x 63
Accessories					
E14F2WS	Two-Way Splitter for the Festoon Range				



110V Globe Light.

The 110V Globe Light is perfect for construction sites, industrial areas, and outdoor workspaces. Delivering full 360° illumination, this versatile unit can stand freely, mount on a tripod, or hang securely using its integrated hook. An emergency version is also available.

- High lumen efficiency 100lm/W
- Pre-wired with 5m cable with plug
- 1x 110V power outlet for interlinking or power tools
- Built in suspension hook for mounting
- 3 year warranty



IP65

IK10

3 Year

50k Hours

120°

Code	Version	Wattage	Lumens	lm/W	Ø x H (mm)
E14GL	Standard, 6000K	30	3050	102	190 x 240
E14GL1	Battery Backup, 6000K	30	3050	102	190 x 240
Accessories					
E14TRI	Tripod Base for 110V Globe Light				



110V Uplight.

Ideal for construction sites, industrial areas, and outdoor workspaces, this uplight delivers powerful 360° illumination. It comes pre-wired with a 5m cable with plug, and 110V power outlet for quick setup.

Designed with a convenient carry strap, it's the perfect lighting solution for plastering, construction, maintenance, and a wide range of general task applications.

- 360° light distribution
- High lumen efficiency 113lm/W
- Pre-wired with 5m cable with plug
- 1x 110V power outlet for interlinking or power tools
- Convenient carry straps



Code	Version	Wattage	Lumens	lm/W	Size (mm)
E14UP	Standard, 6000K	72	8200	114	1495 x 280 x 220



110V Hoarding Light.

The hoarding light offers dual voltage capability operating on both 110V and 240V for maximum flexibility.

Choose from opal, prismatic, or red diffuser options. Supplied with a robust mounting bracket meaning the fitting can be installed vertically or horizontally

- Operates in both 110V and 240V
- CCT selectable 3000K, 4000K, 6000K
- Robust polycarbonate construction
- Diffuser options opal, prismatic, or red diffusers with a black base
- 7x 20mm cable entries
- Flexible mounting, supplied with a sturdy bracket for vertical or horizontal installation



Code	Version	Wattage	Lumens	lm/W	Size (mm)
E14HLP	Prismatic Diffuser	110V-10W 240V-12W	1350-1500	125-135	240 x 110 x 59
E14HLO	Opal Diffuser	110V-10W 240V-12W	1250-1370	114-126	240 x 110 x 59
E14HLR	Red Diffuser	110V-10W 240V-12W	370-420	35-37	240 x 110 x 59



110V Floodlight.

Illuminate your work site with the 110V floodlight range. Ideal for construction sites, industrial zones and outdoor workspaces.

The floodlight is lightweight, easy to install, and built to withstand all weathers to ensure reliability.

- 20W, 45W and 90W versions delivering up to 115lm/w
- Die cast aluminium site light yellow housing
- Tempered glass diffuser
- Pre-wired with 1m H05RN-F cable
- Fully adjustable bracket
- L80 50,000 hours
- 3 year warranty



Code	Version	Wattage	Lumens	lm/W	Size (mm)
E14FL20	4000K	20	2250	113	160 x 108 x 25
E14FL45	4000K	45	5170	115	185 x 140 x 32
E14FL90	4000K	90	10400	116	240 x 180 x 33



Robi.

The Robi is a compact and efficient portable rechargeable floodlight able to offer up to 2000 lumens with a fully adjustable bracket for flexibility in a number of internal and external applications. The Robi features a useful charge status indicator and the 50% power adjustment allows you to extend duration from 3 hours to over 5 hours.

- Switchable power output 100% 2000lm 50% 1000lm at 4000K
- 3 hour battery duration at 100% 5.5 hours at 50%
- Aluminium housing, ABS frame and tempered toughened glass
- 3 hour charge - 4 blue LEDs to indicate charge status
- USB-C to USB 1m cable included 5V 2A input
- Fully adjustable bracket
- Integral 3.7V 4400mAh Li-Ion battery



Code	Version	Wattage	Lumens	lm/W	Size (mm)
E06RB2040	4000K	10/20	1200-2200	110-120	245 x 215 x 45



110V A Frame.

The 110V anti-corrosive linear batten with A-Frame, comes complete with two integrated 110V sockets, and a 5m cable and plug in socket with cable storage facility.

- High lumen efficiency 120lm/W
- IP65 IK08 rated
- Supplied with 5m cable and pre-wired plug
- Includes 2x 110V power outlets for connecting more fittings or power tools
- 2x cable tidy hooks on the stand
- Stainless steel clips - flat head screwdriver required to gain entry
- Emergency version available
- 3 Year Warranty



IP65

IK08

3 Year

50k
Hours

120°


Code	Version	Wattage	Lumens	lm/W	Size (mm)
E14AF	Standard, 4000K	20	2400	120	965 x 650 x 306
E14AFI	2-in-1 Emergency, 4000K	20	2400	120	965 x 650 x 306



110V Tripod.

The 110V tripod and anti-corrosive linear batten, available in 2ft & 5ft comes complete with pre-wired 5m cable with plug, stainless steel retaining clips as standard. The tripod is equipped with 2x 110V power outlets.

- High lumen efficiency 120lm/W
- Pre-wired with 5m cable with plug
- Stainless steel clips - flat head screwdriver required to gain entry
- Tripod with 2x 110V power outlets
- Emergency version available
- 3 year warranty

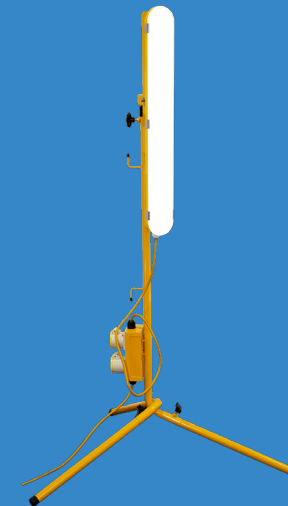

IP44

IK08


3 Year

50k
Hours

120°

Code	Version	Wattage	Lumens	lm/W	Batten (mm)	Tripod (mm)
E14WPT2F	2ft, 4000K	20	2400	120	650 x 85 x 79	1165 x 775 x 775
E14WPT2FI	2-in-1 Emergency, 2ft, 4000K	20	2400	120	650 x 85 x 79	1165 x 775 x 775
E14WPT5F	5ft, 4000K	35	4540	130	1750 x 250 x 82	1165 x 775 x 775
E14WPT5FI	2-in-1 Emergency, 5ft, 4000K	35	4540	130	1750 x 250 x 82	1165 x 775 x 775



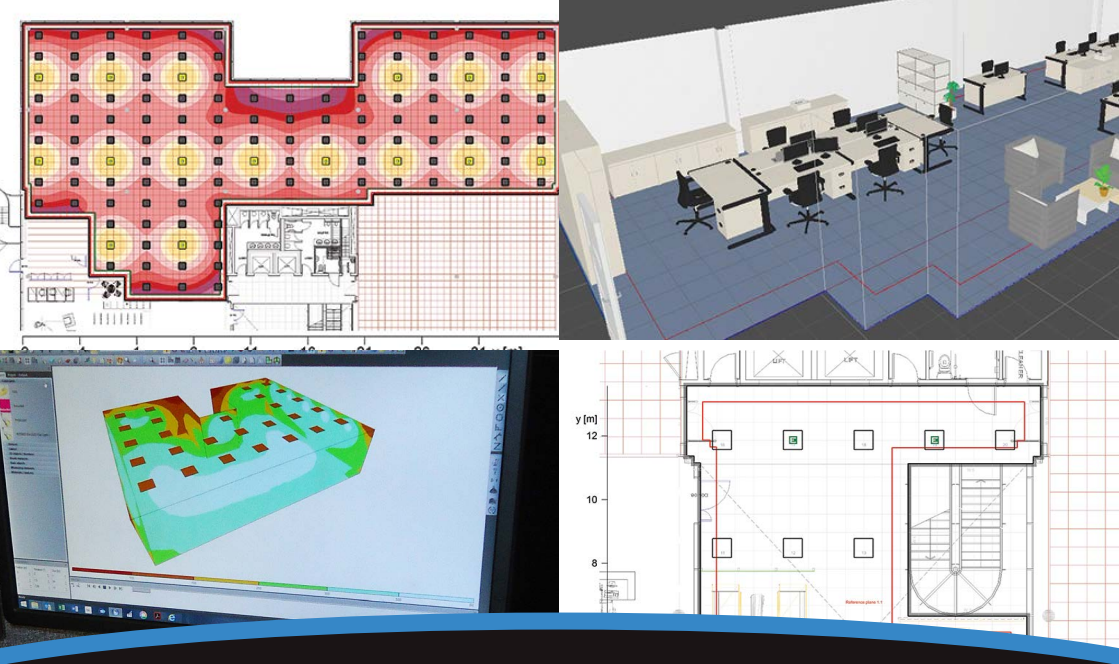

**We Are
eterna.**

Eterna's Free Lighting Design Service.

From concept through to product specification

Our free lighting design service offers detailed insight and solutions for commercial, residential, industrial and emergency lighting projects.

Our team of dedicated lighting designers have years of industry experience and are up to date with any changes to the lighting standards, including BS EN 60598-1 and BS EN 60598-2-22.

Whether commercial, industrial or residential, we approach each and every project in the same way. It involves building a close relationship with the specifier to understand the rooms, their function and creating a plan that offers a plan of lighting solutions that meets compliance but helps to create spaces that create well-lit and comfortable spaces for everyone.

We also ensure that all spaces are safe and compliant with all emergency lighting level standards.

Eterna has been a specialist supplier of lighting, heating, and electrical products to the UK and Irish trade markets since 1946. We provide wholesale-friendly, energy-efficient, and cost-effective solutions that meet the diverse needs of stock and project requirements across the residential, commercial, amenity, and industrial sectors.

We are a dedicated team offering our advice and expertise through your entire buying journey, from stocking solutions, lighting design and technical support. It's our mission to provide invaluable service to everyone.

As part of a client relationship, you will be supported by our external sales force, who will provide regular face-to-face contact, showcasing new products, upgrades and marketing support. They will be backed by our dedicated internal teams, all working together to consistently exceed market expectations with our exceptional service levels.



Lighting Design.

eterna-lighting.co.uk/lighting-design-schemes

New Products.

eterna-lighting.co.uk/new-products

Marketing.

Point of sale, digital artwork and event support

Battery Replacement Service.

eterna-lighting.co.uk/battery-replacement-service

eterna.

eterna-lighting.co.uk
UK: enquiries@eterna-lighting.co.uk | 01933 673144
IE: sales@eterna-lighting.ie | +353 1 844 6300

Eterna Lighting Ltd, Huxley Close, Wellingborough, Northants NN8 6AB
Registered in England No. 410716 | VAT REG: No. GB 229 3783 37

O'Neills Electrical Ltd trading as Eterna Ireland, Unit B4D, Airport Business Park, Cloghran, Co. Dublin, K67 X7H
Co. Reg. No. IE 018423 | WEEE Reg. No. 00093WB | VAT Reg. No. IE 8R73602D

