

2026




eterna.

Site
Lighting.

110V Anti-Corrosive Batten.

The 110V anti-corrosive linear batten, available in 2ft, 4ft & 5ft comes complete with pre-drilled 20mm conduit entry points (capped), stainless steel retaining clips as standard and flexible bracket sliders to suit retrofit positioning.

- High lumen efficiency 120lm/W
- 20mm conduit entry at both ends and rear (ends predrilled and capped)
- Stainless steel clips - flat head screwdriver required to gain entry
- Supplied with IP cable grommet and 2x ceiling brackets
- Emergency version available
- 3 year warranty

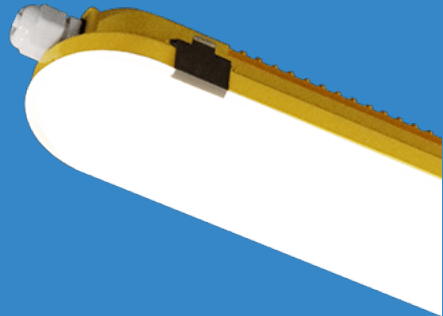

IP65

IK08

3 Year

50k
Hours

120°

Code	Version	Wattage	Lumens	lm/W	Size (mm)
E14WP2F*	2ft, 4000K	20	2400	120	650 x 85 x 79
E14WP4F*	4ft, 4000K	25	3105	124	1200 x 85 x 79
E14WP5F*	5ft, 4000K	35	4540	130	1500 x 85 x 79

Code Suffix*	Version
1	Emergency
CF	Cable Kit with Junction Box
MF	Cable Kit with Male/Female Connector




110V Bulkhead.

A robust rectangular emergency bulkhead designed for 110V applications, supplied in maintained mode with the option to convert to non-maintained operation as required. This energy-efficient 3W luminaire delivers 280 lumens in mains mode and 130 lumens in emergency mode, ensuring reliable illumination during power loss.

The unit is supplied with a full ISO 7010-compliant legend set, with additional directional sign options available.

- Polycarbonate construction
- Hinged gear tray
- Push terminals
- 20mm gland entries as standard
- 3 hour maintained mode configurable to non maintained
- ISO 7010 legend set included
- 3 year product and battery warranty

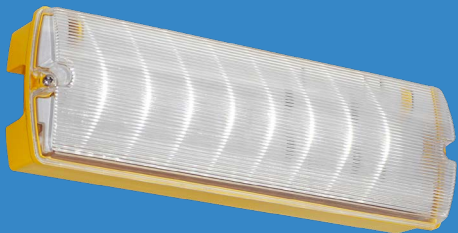

IP65

IK08

3 Year

50k Hours

120°

Code	Version	Wattage	Lumens	lm/W	Size (mm)
E14BH1	Maintained Emergency, 6000K	3	280	93	355 x 110 x 70
Accessories					
LGDSET		Signs Directive Legend Sticker Set			



110V Twinspot.

The emergency 110V twinspot features two fully adjustable heads delivering a combined 400 lumen output for reliable emergency site lighting.

Designed for quick, hassle-free installation, this non-maintained unit is ideal for commercial and industrial applications.

- Polycarbonate construction
- Twin 2.5W LED adjustable and tiltable heads
- Push fit terminals
- 20mm side entry points
- 3 hour non-maintained manual test function



IP65

IK08

3 Year

50k
Hours

120°

Code	Version	Wattage	Lumens	lm/W	Size (mm)
E14TW1	Non-maintained Emergency, 6000K	5	400	80	300 x 294 x 74




110V Festoon.

Our connectable 110V festoon kit range includes 12m, 22m and 50m lengths. Each kit includes a male and female connector to daisy chain, and a 1m starter cable, allowing you to link them in any combination up to 200m.

This makes on-site extension quick and hassle-free.

- 12m, 22m and 50m lengths delivering up to 107lm/W
- Polycarbonate site light yellow housing
- 1m starter cable with industrial 3 pin plug
- L70 50,000 hours
- 3 year warranty



IP44

IK10

3 Year

50k
Hours

120°

Code	Version	Wattage	Lumens	lm/W	Head Size (mm)
E14CF12	12m, 6000K	30	3140	105	75 x 75 x 63
E14CF22	22m, 6000K	50	5355	107	75 x 75 x 63
E14CF50	50m, 6000K	100	10710	107	75 x 75 x 63
Accessories					
E14F2WS	Two-Way Splitter for the Festoon Range				



110V Globe Light.

The 110V Globe Light is perfect for construction sites, industrial areas, and outdoor workspaces. Delivering full 360° illumination, this versatile unit can stand freely, mount on a tripod, or hang securely using its integrated hook. An emergency version is also available.

- High lumen efficiency 100lm/W
- Pre-wired with 5m cable with plug
- 1x 110V power outlet for interlinking or power tools
- Built in suspension hook for mounting
- 3 year warranty



IP65

IK10

3 Year

50k
Hours

120°

Code	Version	Wattage	Lumens	lm/W	Ø x H (mm)
E14GL	Standard, 6000K	30	3050	102	190 x 240
E14GLI	Battery Backup, 6000K	30	3050	102	190 x 240
Accessories					
E14TRI	Tripod Base for 110V Globe Light				



110V Uplight.

Ideal for construction sites, industrial areas, and outdoor workspaces, this uplight delivers powerful 360° illumination. It comes pre-wired with a 5m cable with plug, and 110V power outlet for quick setup.

Designed with a convenient carry strap, it's the perfect lighting solution for plastering, construction, maintenance, and a wide range of general task applications.

- 360° light distribution
- High lumen efficiency 113lm/W
- Pre-wired with 5m cable with plug
- 1x 110V power outlet for interlinking or power tools
- Convenient carry straps



Code	Version	Wattage	Lumens	lm/W	Size (mm)
E14UP	Standard, 6000K	72	8200	114	1495 x 280 x 220



110V Hoarding Light.

The hoarding light offers dual voltage capability operating on both 110V and 240V for maximum flexibility.

Choose from opal, prismatic, or red diffuser options. Supplied with a robust mounting bracket meaning the fitting can be installed vertically or horizontally

- Operates in both 110V and 240V
- CCT selectable 3000K, 4000K, 6000K
- Robust polycarbonate construction
- Diffuser options opal, prismatic, or red diffusers with a black base
- 7x 20mm cable entries
- Flexible mounting, supplied with a sturdy bracket for vertical or horizontal installation



Code	Version	Wattage	Lumens	lm/W	Size (mm)
E14HLP	Prismatic Diffuser	110V-10W 240V-12W	1350-1500	125-135	240 x 110 x 59
E14HLO	Opal Diffuser	110V-10W 240V-12W	1250-1370	114-126	240 x 110 x 59
E14HLR	Red Diffuser	110V-10W 240V-12W	370-420	35-37	240 x 110 x 59



110V Floodlight.

Illuminate your work site with the 110V floodlight range. Ideal for construction sites, industrial zones and outdoor workspaces.

The floodlight is lightweight, easy to install, and built to withstand all weathers to ensure reliability.

- 20W, 45W and 90W versions delivering up to 115lm/W
- Die cast aluminium site light yellow housing
- Tempered glass diffuser
- Pre-wired with 1m H05RN-F cable
- Fully adjustable bracket
- L80 50,000 hours
- 3 year warranty



IP65

IK07

3 Year

50k
Hours

120°

Code	Version	Wattage	Lumens	lm/W	Size (mm)
E14FL20	4000K	20	2250	113	160 x 108 x 25
E14FL45	4000K	45	5170	115	185 x 140 x 32
E14FL90	4000K	90	10400	116	240 x 180 x 33



Robi.

The Robi is a compact and efficient portable rechargeable floodlight able to offer up to 2000 lumens with a fully adjustable bracket for flexibility in a number of internal and external applications. The Robi features a useful charge status indicator and the 50% power adjustment allows you to extend duration from 3 hours to over 5 hours.

- Switchable power output 100% 2000lm 50% 1000lm at 4000K
- 3 hour battery duration at 100% 5.5 hours at 50%
- Aluminium housing, ABS frame and tempered toughened glass
- 3 hour charge - 4 blue LEDs to indicate charge status
- USB-C to USB 1m cable included 5V 2A input
- Fully adjustable bracket
- Integral 3.7V 4400mAh Li-Ion battery



IP54

IK05

2 Year

20k Hours

110°

Code	Version	Wattage	Lumens	lm/W	Size (mm)
E06RB2040	4000K	10/20	1200~2200	110~120	245 x 215 x 45



110V A Frame.

The 110V anti-corrosive linear batten with A-Frame, comes complete with two integrated 110V sockets, and a 5m cable and plug in socket with cable storage facility.

- High lumen efficiency 120lm/W
- IP65 IK08 rated
- Supplied with 5m cable and pre-wired plug
- Includes 2x 110V power outlets for connecting more fittings or power tools
- 2x cable tidy hooks on the stand
- Stainless steel clips – flat head screwdriver required to gain entry
- Emergency version available
- 3 Year Warranty



IP65

IK08

3 Year

50k
Hours

120°


Code	Version	Wattage	Lumens	lm/W	Size (mm)
E14AF	Standard, 4000K	20	2400	120	965 x 650 x 306
E14AF1	2-in-1 Emergency, 4000K	20	2400	120	965 x 650 x 306



110V Tripod.

The 110V tripod and anti-corrosive linear batten, available in 2ft & 5ft comes complete with pre-wired 5m cable with plug, stainless steel retaining clips as standard. The tripod is equipped with 2x 110V power outlets.

- High lumen efficiency 120lm/W
- Pre-wired with 5m cable with plug
- Stainless steel clips - flat head screwdriver required to gain entry
- Tripod with 2x 110V power outlets
- Emergency version available
- 3 year warranty

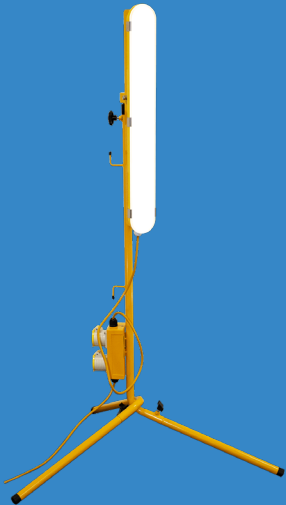

IP44

IK08

3 Year

50k
Hours

120°

Code	Version	Wattage	Lumens	lm/W	Batten (mm)	Tripod (mm)
E14WPT2F	2ft, 4000K	20	2400	120	650 x 85 x 79	1165 x 775 x 775
E14WPT2FI	2-in-1 Emergency, 2ft, 4000K	20	2400	120	650 x 85 x 79	1165 x 775 x 775
E14WPT5F	5ft, 4000K	35	4540	130	1750 x 250 x 82	1165 x 775 x 775
E14WPT5FI	2-in-1 Emergency, 5ft, 4000K	35	4540	130	1750 x 250 x 82	1165 x 775 x 775





We Are eterna.

Eterna has been a specialist supplier of lighting, heating, and electrical products to the UK and Irish trade markets since 1946. We provide wholesale-friendly, energy-efficient, and cost-effective solutions that meet the diverse needs of stock and project requirements across the residential, commercial, amenity, and industrial sectors.

We are a dedicated team offering our advice and expertise through your entire buying journey, from stocking solutions, lighting design and technical support. It's our mission to provide invaluable service to everyone.

As part of a client relationship, you will be supported by our external sales force, who will provide regular face-to-face contact, showcasing new products, upgrades and marketing support. They will be backed by our dedicated internal teams, all working together to consistently exceed market expectations with our exceptional service levels.



Lighting Design.

eterna-lighting.co.uk/lighting-design-schemes

New Products.

eterna-lighting.co.uk/new-products

Marketing.

Point of sale, digital artwork and event support

Battery Replacement Service.

eterna-lighting.co.uk/battery-replacement-service

eterna.

eterna-lighting.co.uk

UK: enquiries@eterna-lighting.co.uk | 01933 673144

IE: sales@eterna-lighting.ie | +353 1 844 6300

Eterna Lighting Ltd, Huxley Close, Wellingborough, Northants NN8 6AB
Registered in England No. 410716 | VAT REG: No. GB 229 3783 37

O'Neills Electrical Ltd trading as Eterna Ireland, Unit B4D, Airport Business Park, Cloghran, Co. Dublin, K67 X7H
Co. Reg. No. IE 018423 | WEEE Reg. No. 00093WB | VAT Reg. No. IE 8R73602D

