




Full circular LED array

Push fit terminals

LED CIRCULAR SLIMLINE CEILING / WALL FITTINGS


- Full circular LED array
- Polycarbonate construction
- Plug in connector between the terminal block and the gear tray. Terminal block is located on the base, allowing for easy wiring and the gear tray to be removed during installation
- IP65, ceiling or wall mounted
- Eterna 2 year warranty

• M.O.M: 1 / O.P.Q: 8



STANDARD ON/OFF MICROWAVE SENSOR

- Adjustable microwave sensor: with options to adjust 2-50 lux or disable, detection range 10-100% and time 5 secs - 15 mins
- The microwave sensor is discreetly placed behind the diffuser: making it unobtrusive so there is no compromise to the appearance of the fitting or the room design

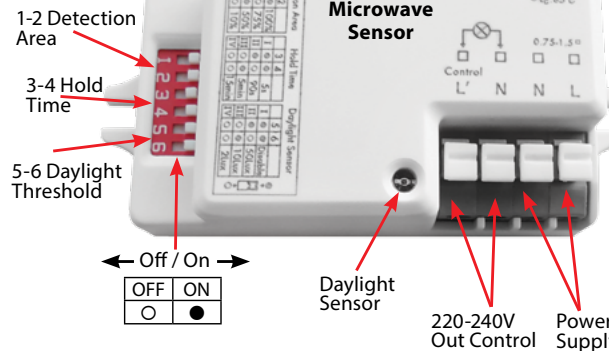

This luminaire contains built-in LED lamps.



The lamps cannot be changed in the luminaire.

874/2012



LED LAMP SPECIFICATIONS:

Luminaire lumens (with diffuser)	1100 lm
Lumens from chip (array)	1350 lm
Useful lumens (array)	1050 lm
Rated Wattage	14W
Rated luminous flux	1050 lm
Nominal life time of the lamp	35,000 hrs
Colour temperature	4200K
Number of switching cycles before premature lamp failure	>15,000
Warm-up time up to 60 % of the full light output	Instant full light
Dimmable	No
Nominal beam angle	120°
Rated power	14W
Rated lamp lifetime	35,000 hrs
Lamp power factor	>0.7
Lumen maintenance factor at end of nominal life	≥0.7
Starting time	<0.1s
Colour rendering	>80 Ra
Colour consistency	Within 6 step Macadam ellipse
Rated peak intensity	400cd
Rated beam angle	120°
Voltage / Frequency	240V~50Hz

Not suitable for accent lighting

Code	Version	Colour	Wattage	Colour Temp.	Luminaire Lumens	Avg. Rated Life (Hrs)	IP Rating	Energy Rating
SLIMLED CR	Standard	Polished Chrome	14W	4200K	1100 lm	35,000 hrs	IP65	A+
SLIMLED WH		White						
MWSLIMLCR	On/Off MW Sensor	Polished Chrome						