









Maintained IP65 Emergency bulkhead 7W LED 6000K with signs directive legend set


DESCRIPTION

High power maintained emergency bulkhead incorporating 3 rows of LEDs for higher output and a more even distribution across the fixture. Supplied as standard with Signs Directive legends set.

FEATURES

- Hinged gear tray & push fit terminal block allows for quicker and easier installation and maintenance
- · 20mm gland entries as standard
- · Internal or external use
- · Viewing distance 20m
- High output LEDs 320 lumens in mains mode and 170 lumens in emergency mode
- 3 hour duration in emergency mode
- Dedicated self adhesive Signs Directive legend pack included with a combination of symbols. Allows multiple exit path designation options
- Ni-Cd 1500mAh replacement battery EB4





GENERAL INFORMATION			
Light Source	LED	Colour / Finish	White
Application	Internal/External	Mounting Type	Surface, Recessed
Product Warranty	5 Years	Battery Warranty	1 Year
Net Weight	0.83 kg		

TECHNICAL INFORMATION				
Nominal Voltage	240 V	Frequency	50-60Hz	
Class Protection	2	Operating Temperature (Min)	0 °C	
Operating Temperature (Max)	40 °C	Average Rated Life	30,000 h	
Number of switching cycles	15,000	Construction Materials Line 1	Polycarbonate	
Dimensions - Height	110 mm	Dimensions - Width	355 mm	
Dimensions - Depth	70 mm			

PRODUCT INFORMATION			
Wattage Combined	7W	CCT Combined	6000K
Luminaire Lumens Combined	320 lm	lm/W Combined	46 lm/w
Beam Angle	120°	CRI	70
SDCM	<6	Lumen Maintenance	0.8
IP Rating	IP65		














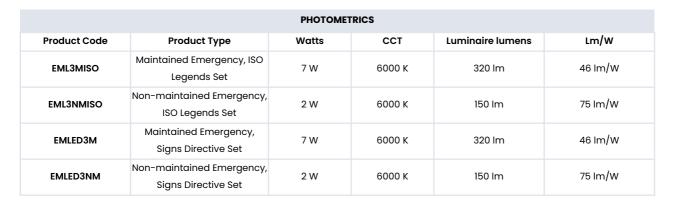

ACCESSORIES		
Product Code	Description	MOM / OPQ
EB1	Ni-Cd 3.6V 1500mAh Stick Battery	1/1
BULKFRAME	Semi-Recessed Emergency Bulkhead White Frame	1 / 12
ISOLGDSET	ISO Legend Set for Emergency Bulkheads	1 / 12
LGDSET	Legend Set For EM Bulkhead	12 / 12

PACKAGING		
Packaging Type	Plain Box	
Individual unit gross weight	931 g	
Pallet Layer Qty	72	
Pallet Layers	5	
Pallet Qty	360	
MOM / OPQ	1/12	







